



SERIAL INVESTMENT  
LANKA (PVT) LTD

LANKA (PVT) LTD

LED Commercial Lighting

# LED 商业照明



EPISTAR

LUMILEDS

PHILIPS


CREE



## 目录 CONTENTS

<b>P01-23</b>	LED HOTEL DOWN LIGHT SERIES LED酒店客房灯系列	<b>P121-123</b>	LED Strip Light Series LED 软灯条系列
<b>P24-45</b>	LED Spot Light Series LED天花射灯系列	<b>P124-125</b>	LED BULB Series LED球泡/蜡烛泡系列
<b>P46-49</b>	Housing For MR16 series MR16面环系列	<b>P126-136</b>	LED Flood Light Series LED户外投光灯系列
<b>P50-58</b>	LED Cabinet Recessed Light Series LED珠宝展柜灯系列	<b>P137-138</b>	LED Outdoor Spot Light Series LED户外射灯系列
<b>P59-66</b>	LED Down Light Series LED平板筒灯系列	<b>P139-140</b>	LED Wall Washer Series LED洗墙灯系列
<b>P67-71</b>	LED Multiple Light Series LED格栅豆胆灯系列	<b>P141-145</b>	LED Ground Light Series LED地埋灯系列
<b>P72-82</b>	LED Surface Mounted Downlight Series 明装筒灯系列	<b>P146-147</b>	LED Outdoor Step Light Series LED户外墙角灯系列
<b>P83-87</b>	LED Hanging lamp series LED吸顶吊线灯系列	<b>P148-149</b>	LED Outdoor Spike Light Series LED户外插地灯系列
<b>P88-99</b>	LED Track Light Series LED轨道灯系列	<b>P150-156</b>	LED Underwater Light Series LED水底灯系列
<b>P100-113</b>	Wall lamp Series 壁灯系列	<b>P157</b>	LED Pool Light Series LED水池壁灯系列
<b>P114-119</b>	LED Indoor Step Light Series LED室内墙角灯系列	<b>P158-165</b>	LED Wall Lawn Light Series LED户外草坪灯系列
<b>P120</b>	LED T5、T8 Series LED T管系列		



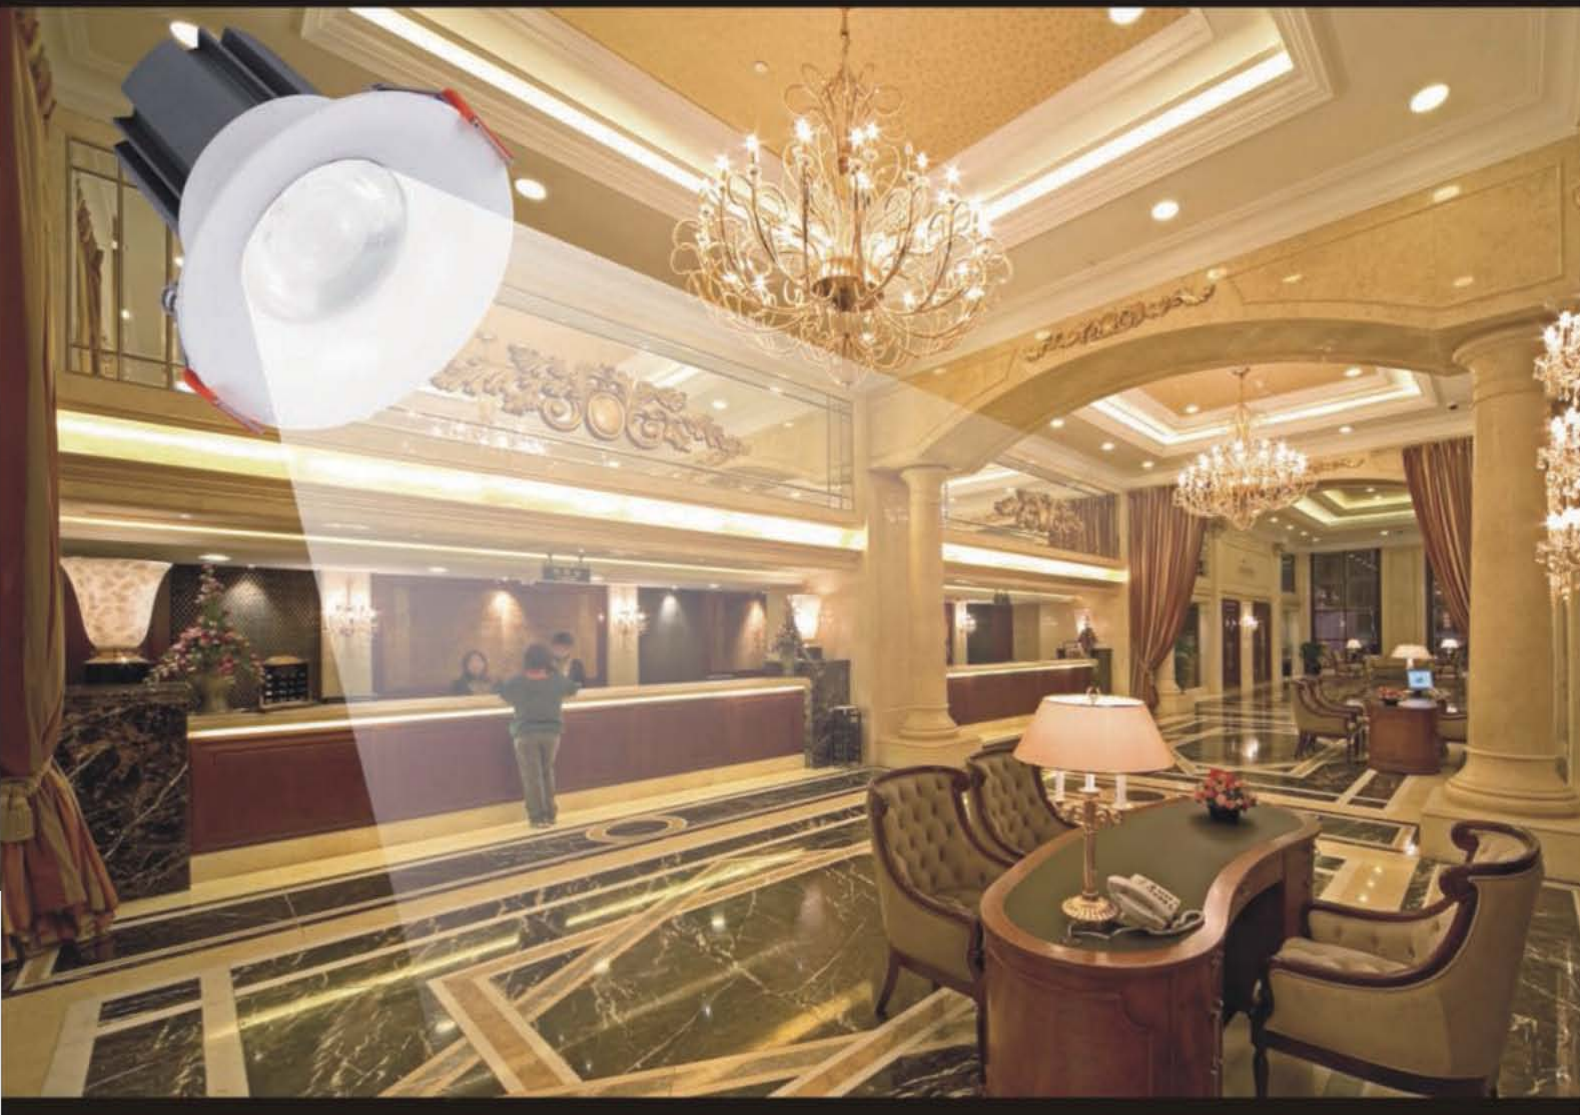

## LED HOTEL DOWN LIGHT SERIES LED酒店客房灯系列

### 产品描述

- ◇ LED酒店筒灯是一种嵌入到天花板内光线下射式的照明灯具，光源隐藏
- ◇ 建筑装饰内部，不外露，无眩光。
- ◇ 同等亮度耗电为普通节能灯的1/4，降低了运营成本。
- ◇ 响应速度快，彻底消除了传统高压钠灯启动过程长的缺点。

### 应用场所

广泛应用于酒店、商场、专卖店、展览馆、咖啡厅、KTV、酒吧和其他室内照明场所等。

### Product Description

- 1.LED hotel down light is a light luminaire which is embedded into the ceiling to shine.and no glare  
The light source is hid into the building decoration.No exposure no glare.
- 2.Both base on the same light. Compared with the common energy-efficient light, the light only takes 25% power consumptive,so it lows the operating costs.
- 3.Hight efficiency,energy saving,low-carbon,and environment protection
- 4.For its high response,the light removes the weakness of traditional high power sodium lamp.

### Applications

They are widely used in hotels,markets,shops,exhibition halls,museums,coffee shops,KTVs,bars,the other indoor lighting rooms and so on.

# LED HOTEL DOWN LIGHT SERIES

## LED酒店客房灯系列



型号Item NO	BRL-SL-1124-7W
尺寸Size	Φ69xH75mm
开孔Cutting	Φ55mm
功率Power	7W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	15° 24° 36°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	BRL-SL-1124-7W
尺寸Size	Φ69xH75mm
开孔Cutting	Φ55mm
功率Power	7W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	15° 24° 36°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	BRL-SL-1124-7W
尺寸Size	Φ69xH75mm
开孔Cutting	Φ55mm
功率Power	7W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	15° 24° 36°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	BRL-SL-1125-5W
尺寸Size	69x69xH75mm
开孔Cutting	Φ55mm
功率Power	5W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	15° 24° 36°
材质Material	铝材Aluminum

单位 Units:mm







## LED HOTEL DOWN LIGHT SERIES LED酒店客房灯系列



型号Item NO	BRL-SL-1125-5W
尺寸Size	69x69xH75mm
开孔Cutting	Φ55mm
功率Power	5W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	15° 24° 36°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	BRL-SL-1125-5W
尺寸Size	69x69xH75mm
开孔Cutting	Φ55mm
功率Power	5W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	15° 24° 36°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	BRL-SL-1130A-10W
尺寸Size	Φ88xH70mm
开孔Cutting	Φ70mm
功率Power	10W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	24° 40°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	BRL-SL-1130B-10W
尺寸Size	Φ88xH70mm
开孔Cutting	Φ70mm
功率Power	10W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	24° 40°
材质Material	铝材Aluminum

单位 Units:mm



LED HOTEL DOWN LIGHT SERIES  
LED酒店客房灯系列



型号Item NO	BRL-SL-1130C-10W
尺寸Size	Φ88xH70mm
开孔Cutting	Φ70mm
功率Power	10W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	24° 40°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	BRL-SL-1121-10W
尺寸Size	Φ83xH61mm
开孔Cutting	Φ70mm
功率Power	10W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	15° 24° 36°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	BRL-SL-1122-5W
尺寸Size	Φ68xH58mm
开孔Cutting	Φ55mm
功率Power	5W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	15° 24° 36°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	BRL-SL-1123-5W
尺寸Size	Φ68xH58mm
开孔Cutting	Φ55mm
功率Power	5W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	15° 24° 36°
材质Material	铝材Aluminum

单位 Units:mm







## LED HOTEL DOWN LIGHT SERIES LED酒店客房灯系列



型号Item NO	<b>BRL-SL-1138-5W</b>
尺寸Size	Φ68xH70mm
开孔Cutting	Φ62mm
功率Power	5W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	24°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	<b>BRL-SL-1139-5W</b>
尺寸Size	Φ68xH70mm
开孔Cutting	Φ62mm
功率Power	5W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	24°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	<b>BRL-SL-1129B-7W</b>
尺寸Size	Φ80xH86mm
开孔Cutting	Φ70mm
功率Power	7W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	15° 24° 36°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	<b>BRL-SL-1133-10W</b>
尺寸Size	Φ89xH87mm
开孔Cutting	Φ80mm
功率Power	10W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	15° 24° 36°
材质Material	铝材Aluminum

单位 Units:mm



# LED HOTEL DOWN LIGHT SERIES

## LED酒店客房灯系列



型号Item NO	<b>BRL-SL-1127-10W</b>
尺寸Size	Φ88xH55mm
开孔Cutting	Φ80mm
功率Power	10W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	24° 40°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	<b>BRL-SL-1129A-7W</b>
尺寸Size	Φ68xH83mm
开孔Cutting	Φ60mm
功率Power	7W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	15° 24° 36°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	<b>BRL-SL-1129B-7W</b>
尺寸Size	Φ80xH86mm
开孔Cutting	Φ70mm
功率Power	7W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	15° 24° 36°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	<b>BRL-SL-1132A-10W</b>
尺寸Size	Φ100xH92mm
开孔Cutting	Φ90mm
功率Power	10W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	15° 24° 36°
材质Material	铝材Aluminum

单位 Units:mm







## LED HOTEL DOWN LIGHT SERIES LED酒店客房灯系列



型号Item NO	<b>BRL-SL-1138-5W</b>
尺寸Size	Φ68xH70mm
开孔Cutting	Φ62mm
功率Power	5W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	24° 40°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	<b>BRL-SL-1131A-10W</b>
尺寸Size	Φ83xH70mm
开孔Cutting	Φ75mm
功率Power	10W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	24° 40°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	<b>BRL-SL-1131C-10W</b>
尺寸Size	Φ83xH70mm
开孔Cutting	Φ75mm
功率Power	10W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	24° 40°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	<b>BRL-SL-1131D-10W</b>
尺寸Size	Φ83xH70mm
开孔Cutting	Φ75mm
功率Power	10W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	24° 40°
材质Material	铝材Aluminum

单位 Units:mm




LED HOTEL DOWN LIGHT SERIES  
LED酒店客房灯系列



型号Item NO:	尺寸Size	开孔Cutting	功率Power	输入电压Input	色温Color Temperature	显指C.R.I	光束角Beam Angle	材质Material
BRL-11096-7W	Φ62XH88mm	Φ50mm	7W	85-265V	3000K/4000K /6000K	80Ra	24° 36°	铝材 Aluminum
BRL-11096-12W	Φ86XH115mm	Φ75mm	12W					
BRL-11096-15W	Φ110XH145mm	Φ101mm	15W					
BRL-11096-20W	Φ140XH155mm	Φ127mm	20W					
BRL-11096-35W	Φ167XH190mm	Φ155mm	35W					
BRL-11096-35W	Φ197XH205mm	Φ183mm	35W					

单位 Units:mm

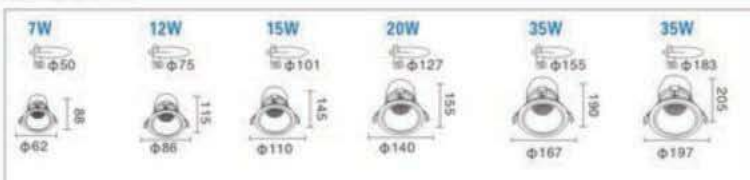





一致的系列设计是碧昂仕LED酒店客房灯的主要特点。本系列产品可配面环有：下照式一光面反射器、椭圆出光口、黑色台阶防眩环、圆形出光口、圆形带玻璃口；调节式一光面反射器、椭圆出光口。基础产品一致，面环可多变，特别是在后期调节式和应用中如需改变灯光效果，不需更换整体灯具，只需更换面环即可。灵活的面环设计可以帮助调节灯光满足特定的照明需求。

面环配件：E01  
砂面，下照光效，比较柔和。  
比选配E06时眩光值低；



面环配件：E02  
椭圆出光口，可调节至小口出光。



面环配件：E03  
黑色台阶式面环，下照光效，防眩舒适；



面环配件：E04  
带玻璃面环，适用于要求防雾的场所；



面环配件：E06  
光面，光效类似选配E01，但明亮感高于选配E01时；



面环配件：E08  
白色台阶式面环，下照光效，防眩感稍弱于E03，但于灯体面环均为白色，可更好于空间融为一体。



面环配件：E09  
小圆孔面环，内带倒锥形防眩杯，有很好的杂散光控制效果；



面环配件：E05  
小圆孔面环，下照光效。



各种不同洗墙的效果



下洗墙，通过规则的排列灯具，提供均匀连续的墙面照明，一般用于形象墙、酒店大堂、展柜等。



双向洗墙，通过规则的反光罩来控制灯光输出的方向，将两侧墙面照亮，多用于酒店走廊等。



宽光束洗墙，采用角度较大的灯杯或反光罩，光斑直径较大，当灯具分布稀疏时，光线也能分布较均匀，但亮度可能稍低。



窄光束洗墙，采用角度较小的灯杯或反光罩，光斑直径较小，需要紧密的排列安装灯具才能实现连续均匀的洗墙效果。

LED HOTEL DOWN LIGHT SERIES  
LED酒店客房灯系列



型号 Item NO: BRL-11010-A-7W/10W

尺寸Size:  $\Phi 90 \times H 110 \text{mm}$   
 开孔Cutting:  $\Phi 75 \text{mm}$   
 功率Power: 7W/10W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 铝材Aluminum

单位 Units:mm



型号 Item NO: BRL-11010-B-7W/10W

尺寸Size:  $\Phi 90 \times H 110 \text{mm}$   
 开孔Cutting:  $\Phi 75 \text{mm}$   
 功率Power: 7W/10W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 铝材Aluminum


单位 Units:mm



型号 Item NO: BRL-11011-C-7W/10W

尺寸Size:  $\Phi 90 \times H 110 \text{mm}$   
 开孔Cutting:  $\Phi 75 \text{mm}$   
 功率Power: 7W/10W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 铝材Aluminum

单位 Units:mm

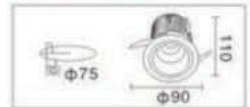

型号 Item NO: BRL-11011-E-7W/10W

尺寸Size:  $\Phi 90 \times H 110 \text{mm}$   
 开孔Cutting:  $\Phi 75 \text{mm}$   
 功率Power: 7W/10W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 铝材Aluminum

单位 Units:mm






LED HOTEL DOWN LIGHT SERIES  
LED酒店客房灯系列



型号Item NO:	尺寸Size	开孔Cutting	功率Power	输入电压Input	色温Color Temperature	显指C.R.I	光束角Beam Angle	材质Material
BRL-SL-1132-10W	Φ73XH105mm	Φ67mm	10W	85-265V	2700K/3000K/ 4000K/6000K	80Ra	30°	铝材 Aluminum
BRL-SL-1132-15W	Φ85XH110mm	Φ78mm	15W					
BRL-SL-1132-20W	Φ105XH120mm	Φ96mm	20W					

单位 Units:mm

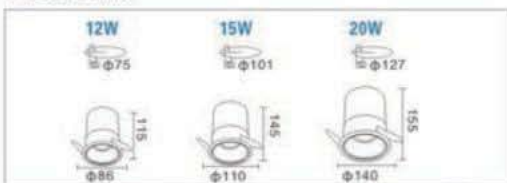





## LED HOTEL DOWN LIGHT SERIES LED酒店客房灯系列



### 型号 Item NO: BRL-11011-H-7W/10W

尺寸Size:  $\Phi 90 \times H 110 \text{mm}$   
 开孔Cutting:  $\Phi 75 \text{mm}$   
 功率Power: 7W/10W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 铝材Aluminum




### 型号 Item NO: BRL-11011-D-7W/10W

尺寸Size:  $\Phi 90 \times H 110 \text{mm}$   
 开孔Cutting:  $\Phi 75 \text{mm}$   
 功率Power: 7W/10W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 铝材Aluminum



### 型号 Item NO: BRL-11011-G-7W/10W

尺寸Size:  $\Phi 90 \times H 110 \text{mm}$   
 开孔Cutting:  $\Phi 75 \text{mm}$   
 功率Power: 7W/10W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 铝材Aluminum

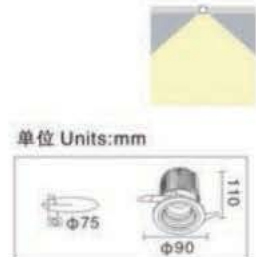

### 型号 Item NO: BRL-11010-BD-7W/10W

尺寸Size:  $\Phi 90 \times H 65 \text{mm}$   
 开孔Cutting:  $\Phi 75 \text{mm}$   
 功率Power: 7W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 铝材Aluminum



### 型号 Item NO: BRL-11011-DD-7W

尺寸Size:  $\Phi 90 \times H 65 \text{mm}$   
 开孔Cutting:  $\Phi 75 \text{mm}$   
 功率Power: 7W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 铝材Aluminum



# LED HOTEL DOWN LIGHT SERIES

## LED酒店客房灯系列



型号Item NO	BRL-11010-A-15W	BRL-11010-A-20W
尺寸Size	Φ100XH105mm	Φ110XH105mm
开孔Cutting	Φ85mm	Φ95mm
功率Power	15W	20W
输入电压Input	85-265V	
色温Color Temperature	3000K/4000K/6000K	
显指C.R.I	82Ra	
光束角Beam Angle	15° 25° 40° 60°	
材质Material	铝材Aluminum	

单位 Units:mm



型号Item NO	BRL-11010-B-15W	BRL-11010-B-20W
尺寸Size	Φ100XH105mm	Φ110XH105mm
开孔Cutting	Φ85mm	Φ95mm
功率Power	15W	20W
输入电压Input	85-265V	
色温Color Temperature	3000K/4000K/6000K	
显指C.R.I	82Ra	
光束角Beam Angle	15° 25° 40° 60°	
材质Material	铝材Aluminum	

单位 Units:mm



型号Item NO	BRL-11011-C-15W	BRL-11011-C-20W
尺寸Size	Φ100XH105mm	Φ110XH105mm
开孔Cutting	Φ85mm	Φ95mm
功率Power	15W	20W
输入电压Input	85-265V	
色温Color Temperature	3000K/4000K/6000K	
显指C.R.I	82Ra	
光束角Beam Angle	15° 25° 40° 60°	
材质Material	铝材Aluminum	

单位 Units:mm



型号Item NO	BRL-11011-F-15W	BRL-11011-F-20W
尺寸Size	Φ100XH105mm	Φ110XH105mm
开孔Cutting	Φ85mm	Φ95mm
功率Power	15W	20W
输入电压Input	85-265V	
色温Color Temperature	3000K/4000K/6000K	
显指C.R.I	82Ra	
光束角Beam Angle	15° 25° 40° 60°	
材质Material	铝材Aluminum	

单位 Units:mm





一致的系列设计是碧昂仕LED酒店客房灯的主要特点。散热器不变，分别有10W、15W两种，八种独立面环，可随意匹配，灵活多变。特别是在后期调节和应用中如需改变灯光效果及亮度，不需要更换整体灯具，只需更换面环即可。灵活的面环设计可以帮助调节灯光满足特定的照明需求。

This is a new and flexible design. The 10W, 15W heat sink, match with 8 different design rings. When need to change the lighting effect or to change the power, you don't need to change the whole light, only change the ring to change lighting effect; and change the heat sink to change power to achive the lighting effect you need.





## LED HOTEL DOWN LIGHT SERIES LED酒店客房灯系列



型号Item NO	BRL-11098-A-10W	BRL-11098-A-15W
尺寸Size	Φ92XH105mm	Φ92XH110mm
开孔Cutting	Φ80mm	Φ80mm
功率Power	10W	15W
输入电压Input	85-265V	
色温Color Temperature	3000K/4000K/6000K	
显指C.R.I	80Ra	
光束角Beam Angle	15° 24° 36°	
材质Material	铝材Aluminum	

单位 Units:mm



型号Item NO	BRL-11098-B-10W	BRL-11098-B-15W
尺寸Size	Φ92XH105mm	Φ92XH110mm
开孔Cutting	Φ80mm	Φ80mm
功率Power	10W	15W
输入电压Input	85-265V	
色温Color Temperature	3000K/4000K/6000K	
显指C.R.I	80Ra	
光束角Beam Angle	15° 24° 36°	
材质Material	铝材Aluminum	

单位 Units:mm



型号Item NO	BRL-11098-C-10W	BRL-11098-C-15W
尺寸Size	Φ92XH105mm	Φ92XH110mm
开孔Cutting	Φ80mm	Φ80mm
功率Power	10W	15W
输入电压Input	85-265V	
色温Color Temperature	3000K/4000K/6000K	
显指C.R.I	80Ra	
光束角Beam Angle	15° 24° 36°	
材质Material	铝材Aluminum	

单位 Units:mm



型号Item NO	BRL-11098-D-10W	BRL-11098-D-15W
尺寸Size	Φ106XH105mm	Φ106XH110mm
开孔Cutting	Φ90mm	Φ90mm
功率Power	10W	15W
输入电压Input	85-265V	
色温Color Temperature	3000K/4000K/6000K	
显指C.R.I	80Ra	
光束角Beam Angle	15° 24° 36°	
材质Material	铝材Aluminum	

单位 Units:mm



LED HOTEL DOWN LIGHT SERIES  
LED酒店客房灯系列



型号Item NO	BRL-11099-A-10W	BRL-11099-A-15W
尺寸Size	Φ85XH105mm	Φ85XH111mm
开孔Cutting	Φ77mm	Φ77mm
功率Power	10W	15W
输入电压Input	85-265V	
色温Color Temperature	3000K/4000K/6000K	
显指C.R.I	80Ra	
光束角Beam Angle	15° 24° 36°	
材质Material	铝材Aluminum	

单位 Units:mm



型号Item NO	BRL-11099-B-10W	BRL-11099-B-15W
尺寸Size	Φ100XH115mm	Φ100XH121mm
开孔Cutting	Φ93mm	Φ93mm
功率Power	10W	15W
输入电压Input	85-265V	
色温Color Temperature	3000K/4000K/6000K	
显指C.R.I	80Ra	
光束角Beam Angle	15° 24° 36°	
材质Material	铝材Aluminum	

单位 Units:mm



型号Item NO	BRL-11099-C-10W	BRL-11099-C-15W
尺寸Size	Φ95XH98mm	Φ95XH104mm
开孔Cutting	Φ84mm	Φ84mm
功率Power	10W	15W
输入电压Input	85-265V	
色温Color Temperature	3000K/4000K/6000K	
显指C.R.I	80Ra	
光束角Beam Angle	15° 24° 36°	
材质Material	铝材Aluminum	

单位 Units:mm



型号Item NO	BRL-11099-D-10W	BRL-11099-D-15W
尺寸Size	95X95XH97mm	95X95XH103mm
开孔Cutting	84mm	84mm
功率Power	10W	15W
输入电压Input	85-265V	
色温Color Temperature	3000K/4000K/6000K	
显指C.R.I	80Ra	
光束角Beam Angle	15° 24° 36°	
材质Material	铝材Aluminum	

单位 Units:mm





LED HOTEL DOWN LIGHT SERIES  
LED酒店客房灯系列




型号 Item NO: BRL-11008-A-7W/10W

尺寸Size:  $\Phi 92 \times H 95 \text{mm}$   
 开孔Cutting:  $\Phi 80 \text{mm}$   
 功率Power: 7W/10W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 铝材Aluminum



单位 Units:mm



型号 Item NO: BRL-11088-B-7W/10W

尺寸Size:  $\Phi 92 \times H 95 \text{mm}$   
 开孔Cutting:  $\Phi 80 \text{mm}$   
 功率Power: 7W/10W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 铝材Aluminum



单位 Units:mm




型号 Item NO: BRL-11008-C-7W/10W

尺寸Size:  $\Phi 92 \times H 95 \text{mm}$   
 开孔Cutting:  $\Phi 80 \text{mm}$   
 功率Power: 7W/10W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 铝材Aluminum



单位 Units:mm



型号 Item NO: BRL-11088-D-7W/10W

尺寸Size:  $\Phi 102 \times H 95 \text{mm}$   
 开孔Cutting:  $\Phi 90 \text{mm}$   
 功率Power: 7W/10W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 铝材Aluminum



单位 Units:mm





# LED HOTEL DOWN LIGHT SERIES

## LED酒店客房灯系列



型号Item NO	BRL-903L-7W/10W固定
尺寸Size	Φ89xH107mm
开孔Cutting	Φ78mm
功率Power	7W / 10W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	24°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	BRL-909L-7W/10W
尺寸Size	Φ79xH90mm
开孔Cutting	Φ74mm
功率Power	7W / 10W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	24°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	BRL-913L-7W/10W固定
尺寸Size	Φ95xH115mm
开孔Cutting	Φ83mm
功率Power	7W / 10W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	24°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	BRL-914L-7W/10W
尺寸Size	Φ95xH104mm
开孔Cutting	Φ84mm
功率Power	7W / 10W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	24°
材质Material	铝材Aluminum

单位 Units:mm





## LED HOTEL DOWN LIGHT SERIES LED酒店客房灯系列



型号Item NO	<b>BRL-915L-7W/10W</b>
尺寸Size	94x94xH105mm
开孔Cutting	85x85mm
功率Power	7W / 10W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	24°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	<b>BRL-901L-7W/10W内圆</b>
尺寸Size	Φ83xH123mm
开孔Cutting	Φ73mm
功率Power	7W / 10W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	24°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	<b>BRL-902L-7W/10W内椭圆</b>
尺寸Size	Φ83xH123mm
开孔Cutting	Φ73mm
功率Power	7W / 10W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	24°
材质Material	铝材Aluminum

单位 Units:mm



# LED HOTEL DOWN LIGHT SERIES

## LED酒店客房灯系列



型号Item NO	BRL-903L-7W/10W
尺寸Size	Φ89xH110mm
开孔Cutting	Φ78mm
功率Power	7W / 10W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	24°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	BRL-904L-7W/10W
尺寸Size	Φ80xH115mm
开孔Cutting	Φ73mm
功率Power	7W / 10W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	24°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	BRL-905L-7W/10W椭圆孔
尺寸Size	Φ80xH103mm
开孔Cutting	Φ73mm
功率Power	7W / 10W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	24°
材质Material	铝材Aluminum

单位 Units:mm







## LED HOTEL DOWN LIGHT SERIES LED酒店客房灯系列



型号Item NO	BRL-906L-7W/10W圆孔
尺寸Size	Φ80xH103mm
开孔Cutting	Φ73mm
功率Power	7W / 10W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	24°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	BRL-907L-A-7W/10W调角度
尺寸Size	Φ79xH108mm
开孔Cutting	Φ73mm
功率Power	7W / 10W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	24°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	BRL-907L-B-7W/10W固定
尺寸Size	Φ79xH108mm
开孔Cutting	Φ73mm
功率Power	7W / 10W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	24°
材质Material	铝材Aluminum

单位 Units:mm



# LED HOTEL DOWN LIGHT SERIES

## LED酒店客房灯系列



型号Item NO	BRL-910L-7W/10W正框
尺寸Size	84x84H120mm
开孔Cutting	76x76mm
功率Power	7W / 10W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	24°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	BRL-910L-7W/10W斜框
尺寸Size	84x84H120mm
开孔Cutting	76x76mm
功率Power	7W / 10W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80Ra
光束角Beam Angle	24°
材质Material	铝材Aluminum

单位 Units:mm





LED HOTEL DOWN LIGHT SERIES  
LED酒店客房灯系列



颜色：黑色、白、砂银、亮杯、玫瑰金、磨砂、亮金

型号Item NO:	尺寸Size	开孔Cutting	功率Power	输入电压Input	色温Color Temperature	显指C.R.I	光束角Beam Angle	材质Material
BRL-908L-7W/10W无边框	Φ140XH110mm	Φ90mm	7W/10W	85-265V	2700/3000K/ 4000K/6000K	80Ra	24°	铝材 Aluminum
BRL-912L-7W/10W无边框	Φ140XH110mm	Φ83mm	7W/10W					

单位 Units:mm







## LED Spot Light Series LED天花射灯系列

### 产品描述

- ◇ LED天花射灯是一种嵌入到天花板内光线下射式的照明灯具，光源隐藏
- ◇ 建筑装饰内部，不外露，无眩光。
- ◇ 同等亮度耗电为普通节能灯的1/4，降低了运营成本。
- ◇ 响应速度快，彻底消除了传统高压钠灯启动过程长的缺点。

### 应用场所

广泛应用于酒店、商场、专卖店、展览馆、咖啡厅、KTV、酒吧和其他室内照明场所等。

### Product Description

- 1.LED hotel Spot light is a light luminaire which is embedded into the ceiling to shine and no glare  
The light source is hid into the building decoration.No exposure no glare.
- 2.Both base on the same light. Compared with the common energy-efficient light, the light only takes 25% power consumptive,so it lows the operating costs.
- 3.Hight efficiency,energy saving,low-carbon,and environment protection
- 4.For its high response,the light removes the weakness of traditional high power sodium lamp.

### Applications

They are widely used in hotels,markets,shops,exhibition halls,museums,coffee shops,KTVs,bars,the other indoor lighting rooms and so on.



# LED Spot Light Series LED天花射灯系列



## 型号 Item NO: BRL-SL-1155-7W/12W 固定

尺寸Size:  $\Phi 85 \times H 80 \text{mm}$   
 开孔Cutting:  $\Phi 72 \text{mm}$   
 功率Power: 7W/12W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 20° 36° 60°  
 材质Material: 铝材Aluminum



单位 Units:mm




## 型号 Item NO: BRL-SL-1156A-7W/12W 可调

尺寸Size:  $\Phi 90 \times H 78 \text{mm}$   
 开孔Cutting:  $\Phi 72 \text{mm}$   
 功率Power: 7W/12W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 20° 36° 60°  
 材质Material: 铝材Aluminum



单位 Units:mm




## 型号 Item NO: BRL-SL-1156B-7W/12W 固定

尺寸Size:  $\Phi 90 \times H 82 \text{mm}$   
 开孔Cutting:  $\Phi 72 \text{mm}$   
 功率Power: 7W/12W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 20° 36° 60°  
 材质Material: 铝材Aluminum



单位 Units:mm




## 型号 Item NO: BRL-SL-1157-7W/12W 可调

尺寸Size:  $90 \times 90 \times H 78 \text{mm}$   
 开孔Cutting:  $72 \times 72 \text{mm}$   
 功率Power: 7W/12W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 20° 36° 60°  
 材质Material: 铝材Aluminum



单位 Units:mm





LED Spot Light Series  
LED天花射灯系列



型号 Item NO: BRL-SL-1157-7W/12W固定

尺寸Size: 90x90xH78mm  
开孔Cutting: 72x72mm  
功率Power: 7W/12W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle: 20° 36° 60°  
材质Material: 铝材Aluminum



单位 Units:mm



型号 Item NO: BRL-SL-1165-12W

尺寸Size:  $\Phi 90$ XH90mm  
开孔Cutting:  $\Phi 75$ mm  
功率Power: 12W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle: 20° 36° 60°  
材质Material: 铝材Aluminum



单位 Units:mm




型号 Item NO: BRL-SL-1166-12W

尺寸Size: 84x84xH90mm  
开孔Cutting:  $\Phi 75$ mm  
功率Power: 12W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle: 20° 36° 60°  
材质Material: 铝材Aluminum



单位 Units:mm




型号 Item NO: BRL-SL-1167-12W

尺寸Size:  $\Phi 88$ XH90mm  
开孔Cutting:  $\Phi 75$ mm  
功率Power: 12W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle: 20° 36° 60°  
材质Material: 铝材Aluminum



单位 Units:mm







## LED Spot Light Series LED天花射灯系列




型号Item NO	<b>BRL-SL-1168-12W</b>
尺寸Size	84x84xH90mm
开孔Cutting	Φ75mm
功率Power	12W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	82Ra
光束角Beam Angle	20° 36° 60°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	<b>BRL-SL-1171-12W</b>
尺寸Size	Φ115XH100mm
开孔Cutting	Φ100mm
功率Power	12W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	82Ra
光束角Beam Angle	20° 36° 60°
材质Material	铝材Aluminum

单位 Units:mm




型号Item NO	<b>BRL-SL-1173-20W</b>
尺寸Size	Φ115XH130mm
开孔Cutting	Φ100mm
功率Power	20W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	82Ra
光束角Beam Angle	15° 24° 38° 60°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	<b>BRL-SL-1174-20W</b>
尺寸Size	Φ115XH113mm
开孔Cutting	Φ100mm
功率Power	20W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	82Ra
光束角Beam Angle	20° 36° 60°
材质Material	铝材Aluminum

单位 Units:mm



# LED Spot Light Series

## LED天花射灯系列




<b>型号Item NO</b>	<b>BRL-SL-1169-12W</b>
尺寸Size	Φ98XH86mm
开孔Cutting	Φ85mm
功率Power	12W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	82Ra
光束角Beam Angle	20° 36° 60°
材质Material	铝材Aluminum

单位 Units:mm




<b>型号Item NO</b>	<b>BRL-SL-1170-12W</b>
尺寸Size	Φ98XH86mm
开孔Cutting	Φ85mm
功率Power	12W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	82Ra
光束角Beam Angle	20° 36° 60°
材质Material	铝材Aluminum

单位 Units:mm



<b>型号Item NO</b>	<b>BRL-SL-1175-10W/20W</b>
尺寸Size	115x115xH130mm
开孔Cutting	100x100mm
功率Power	10W/20W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	82Ra
光束角Beam Angle	15° 24° 38° 60°
材质Material	铝材Aluminum

单位 Units:mm



<b>型号Item NO</b>	<b>BRL-SL-1176-2-10W/20W</b>
尺寸Size	230x115xH130mm
开孔Cutting	210x100mm
功率Power	10W/20W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	82Ra
光束角Beam Angle	15° 24° 38° 60°
材质Material	铝材Aluminum

单位 Units:mm






## LED Spot Light Series LED天花射灯系列



型号Item NO	<b>BRL-SL-1153-7W</b>
尺寸Size	Φ85XH58mm
开孔Cutting	Φ75mm
功率Power	72W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	82Ra
光束角Beam Angle	20° 36° 60°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	<b>BRL-SL-1154-7W</b>
尺寸Size	85x85xH58mm
开孔Cutting	Φ70mm
功率Power	12W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	82Ra
光束角Beam Angle	20° 36° 60°
材质Material	铝材Aluminum

单位 Units:mm







### 1203A反光杯系列

型号Item NO	尺寸Size	开孔Cutting	功率Power	输入电压Input	色温Color Temperature	显指C.R.I	光束角Beam Angle	材质Material
BRL-SL-1203A-5W	92xH50mm	Φ 75mm	5W	85-265V	2700K/3000K/ 4000K/6000K	82Ra	35°	铝材 Aluminum
BRL-SL-1203A-2x5W	92x180xH50mm	75x150mm	2x5W	85-265V	2700K/3000K/ 4000K/6000K	82Ra	35°	铝材 Aluminum
BRL-SL-1203A-3x5W	92x250xH50mm	75x230mm	3x5W	85-265V	2700K/3000K/ 4000K/6000K	82Ra	35°	铝材 Aluminum
BRL-SL-1203A-10W	120xH70mm	Φ 90mm	10W	85-265V	2700K/3000K/ 4000K/6000K	82Ra	35°	铝材 Aluminum
BRL-SL-1203A-2x10W	120x230xH70mm	90x200mm	2x10W	85-265V	2700K/3000K/ 4000K/6000K	82Ra	35°	铝材 Aluminum
BRL-SL-1203A-3x10W	120x330xH70mm	90x300mm	3x10W	85-265V	2700K/3000K/ 4000K/6000K	82Ra	35°	铝材 Aluminum
BRL-SL-1203A-15W	140xH70mm	Φ 120mm	15W	85-265V	2700K/3000K/ 4000K/6000K	82Ra	35°	铝材 Aluminum
BRL-SL-1203A-2x15W	140x280xH70mm	120x260mm	2x15W	85-265V	2700K/3000K/ 4000K/6000K	82Ra	35°	铝材 Aluminum
BRL-SL-1203A-3x15W	140x400xH70mm	120x370mm	3x15W	85-265V	2700K/3000K/ 4000K/6000K	82Ra	35°	铝材 Aluminum
BRL-SL-1203A-25W	160xH80mm	Φ 130mm	25W	85-265V	2700K/3000K/ 4000K/6000K	82Ra	35°	铝材 Aluminum
BRL-SL-1203A-2x25W	160x320xH80mm	130x290mm	2x25W	85-265V	2700K/3000K/ 4000K/6000K	82Ra	35°	铝材 Aluminum

单位 Units:mm






# LED Spot Light Series LED天花射灯系列



型号Item NO	尺寸Size	开孔Cutting	功率Power	输入电压Input	色温Color Temperature	显指C.R.I	光束角Beam Angle	材质Material
BRL-SL-1147B-3W	Φ68XH70mm	Φ55mm	3W	85-265V	2700K/3000K/ 4000K/6000K	80/90Ra	24°	铝材 Aluminum
BRL-SL-1147B-7W	Φ90XH75mm	Φ75mm	7W	85-265V	2700K/3000K/ 4000K/6000K	80/90Ra	24°	铝材 Aluminum
BRL-SL-1147B-10W	Φ108XH95mm	Φ90mm	10W	85-265V	2700K/3000K/ 4000K/6000K	80/90Ra	24°	铝材 Aluminum
BRL-SL-1147B-15W	Φ138XH110mm	Φ120mm	15W	85-265V	2700K/3000K/ 4000K/6000K	80/90Ra	24°	铝材 Aluminum
BRL-SL-1147B-20W	Φ160XH125mm	Φ140mm	20W	85-265V	2700K/3000K/ 4000K/6000K	80/90Ra	24°	铝材 Aluminum
BRL-SL-1147B-30W	Φ180XH135mm	Φ160mm	30W	85-265V	2700K/3000K/ 4000K/6000K	80/90Ra	24°	铝材 Aluminum

单位 Units:mm

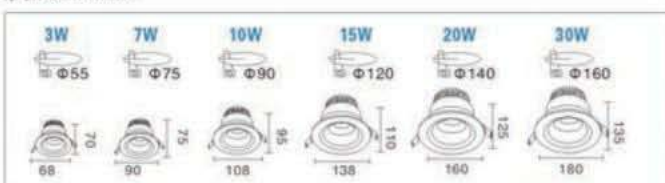


LED Spot Light Series  
LED天花射灯系列



型号Item NO	尺寸Size	开孔Cutting	功率Power	输入电压Input	色温Color Temperature	显指C.R.I	光束角Beam Angle	材质Material
BRL-SL-1181-10W	Φ90XH42mm	Φ70mm	10W	85-265V	2700K/3000K/ 4000K/6000K	80/90Ra	35°	铝材 Aluminum
BRL-SL-1181-15W	Φ120XH62mm	Φ100mm	15W	85-265V	2700K/3000K/ 4000K/6000K	80/90Ra	35°	铝材 Aluminum
BRL-SL-1181-30W	Φ165XH70mm	Φ140mm	30W	85-265V	2700K/3000K/ 4000K/6000K	80/90Ra	35°	铝材 Aluminum
BRL-SL-1181-8-60W	Φ225XH100mm	Φ200mm	60W	85-265V	2700K/3000K/ 4000K/6000K	80/90Ra	35°	铝材 Aluminum
BRL-SL-1181-9-60W	Φ280XH100mm	Φ260mm	60W	85-265V	2700K/3000K/ 4000K/6000K	80/90Ra	35°	铝材 Aluminum
BRL-SL-1181-10-60W	Φ300XH100mm	Φ280mm	60W	85-265V	2700K/3000K/ 4000K/6000K	80/90Ra	35°	铝材 Aluminum

单位 Units:mm

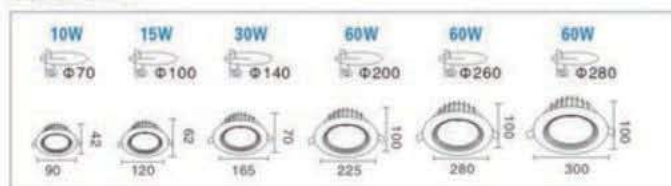






## LED Spot Light Series LED天花射灯系列




型号Item NO	BRL-SL-1119-5W	BRL-SL-1119-10W	BRL-SL-1119-20W
尺寸Size	Φ85xH50mm	Φ110xH65mm	Φ140xH80mm
开孔Cutting	Φ75mm	Φ95mm	Φ120mm
功率Power	5W	10W	20W
输入电压Input	85-265V		
色温Color Temperature	2700K/3000K/4000K/6000K		
显指C.R.I	80/90Ra		
光束角Beam Angle	15°		
材质Material	铝材Aluminum		

单位 Units:mm

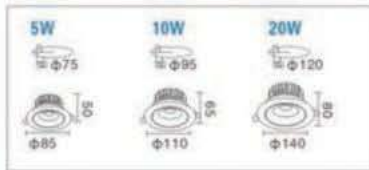

型号Item NO	BRL-SL-1120-10W	BRL-SL-1120-20W	BRL-SL-1120-30W
尺寸Size	Φ95xH91mm	Φ120xH100mm	Φ145xH130mm
开孔Cutting	Φ80mm	Φ105mm	Φ125mm
功率Power	10W	20W	30W
输入电压Input	85-265V		
色温Color Temperature	2700K/3000K/4000K/6000K		
显指C.R.I	80/90Ra		
光束角Beam Angle	15°		
材质Material	铝材Aluminum		

单位 Units:mm

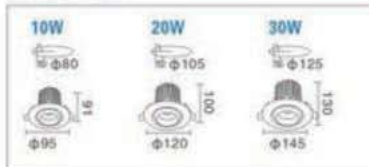

型号Item NO	BRL-SL-1121-10W	BRL-SL-1121-20W	BRL-SL-1121-30W
尺寸Size	Φ85xH88mm	Φ110xH95mm	Φ140xH122mm
开孔Cutting	Φ75mm	Φ95mm	Φ115mm
功率Power	10W	20W	30W
输入电压Input	85-265V		
色温Color Temperature	2700K/3000K/4000K/6000K		
显指C.R.I	80/90Ra		
光束角Beam Angle	15°		
材质Material	铝材Aluminum		

单位 Units:mm



# LED Spot Light Series LED天花射灯系列



型号Item NO	尺寸Size	开孔Cutting	功率Power	输入电压Input	色温Color Temperature	显指C.R.I	光束角Beam Angle	材质Material
BRL-SL-1122-10W	Φ95XH110mm	Φ80mm	10W	85-265V	2700K/3000K/ 4000K/6000K	80/90Ra	15°	铝材 Aluminum
BRL-SL-1122-20W	Φ120XH120mm	Φ110mm	20W	85-265V	2700K/3000K/ 4000K/6000K	80/90Ra	15°	铝材 Aluminum
BRL-SL-1122-30W	Φ145XH150mm	Φ128mm	30W	85-265V	2700K/3000K/ 4000K/6000K	80/90Ra	15°	铝材 Aluminum

单位 Units:mm



型号Item NO	BRL-SL-1070-20W
尺寸Size	Φ120XH120mm
开孔Cutting	Φ110mm
功率Power	20W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80/90Ra
光束角Beam Angle	15° 24° 36°
材质Material	铝材Aluminum
颜色Colour	金色、黑色、玫瑰金、白色、磨砂金、亮杯、砂银

单位 Units:mm





## LED Spot Light Series LED天花射灯系列



型号Item NO	BRL-SL-1123-A-5W	BRL-SL-1123-A-10W	BRL-SL-1123-A-15W	BRL-SL-1123-A-20W
尺寸Size	Φ95XH110mm	Φ95XH115mm	Φ95XH135mm	Φ120XH130mm
开孔Cutting	Φ80mm	Φ80mm	Φ80mm	Φ110mm
功率Power	5W	10W	15W	20W
输入电压Input	85-265V			
色温Color Temperature	3000K/4000K/6000K			
显指C.R.I	80/90Ra			
光束角Beam Angle	15°			
材质Material	铝材Aluminum			

单位 Units:mm



型号Item NO	BRL-SL-1123-B-5W	BRL-SL-1123-B-10W	BRL-SL-1123-B-15W	BRL-SL-1123-B-20W
尺寸Size	Φ95XH110mm	Φ95XH115mm	Φ95XH135mm	Φ120XH130mm
开孔Cutting	Φ80mm	Φ80mm	Φ80mm	Φ110mm
功率Power	5W	10W	15W	20W
输入电压Input	85-265V			
色温Color Temperature	3000K/4000K/6000K			
显指C.R.I	80/90Ra			
光束角Beam Angle	15°			
材质Material	铝材Aluminum			

单位 Units:mm



型号Item NO	BRL-SL-1123-C-5W	BRL-SL-1123-C-10W	BRL-SL-1123-C-15W	BRL-SL-1123-C-20W
尺寸Size	Φ95XH110mm	Φ95XH115mm	Φ95XH135mm	Φ120XH130mm
开孔Cutting	Φ80mm	Φ80mm	Φ80mm	Φ110mm
功率Power	5W	10W	15W	20W
输入电压Input	85-265V			
色温Color Temperature	3000K/4000K/6000K			
显指C.R.I	80/90Ra			
光束角Beam Angle	15°			
材质Material	铝材Aluminum			

单位 Units:mm





# LED Spot Light Series

## LED天花射灯系列



型号Item NO	BRL-SL-1124-10W	BRL-SL-1124-20W	BRL-SL-1124-30W
尺寸Size	93x93xH90mm	120x120xH105mm	138x138xH118mm
开孔Cutting	Φ80mm	Φ100mm	Φ120mm
功率Power	10W	20W	30W
输入电压Input	85-265V		
色温Color Temperature	2700K/3000K/4000K/6000K		
显指C.R.I	80/90Ra		
光束角Beam Angle	15°		
材质Material	铝材Aluminum		

单位 Units:mm



型号Item NO	BRL-SL-1125-2x10W	BRL-SL-1125-2x20W	BRL-SL-1125-2x30W
尺寸Size	92x175xH90mm	120x229xH100mm	140x268xH118mm
开孔Cutting	75x150mm	90x195mm	115x235mm
功率Power	2x10W	2x20W	2x30W
输入电压Input	85-265V		
色温Color Temperature	2700K/3000K/4000K/6000K		
显指C.R.I	80/90Ra		
光束角Beam Angle	15°		
材质Material	铝材Aluminum		

单位 Units:mm



型号Item NO	BRL-SL-1126-3x10W	BRL-SL-1126-3x20W	BRL-SL-1126-3x30W
尺寸Size	93x260xH100mm	120x330xH105mm	140x400xH118mm
开孔Cutting	75x240mm	90x320mm	118x380mm
功率Power	3x10W	3x20W	3x30W
输入电压Input	85-265V		
色温Color Temperature	2700K/3000K/4000K/6000K		
显指C.R.I	80/90Ra		
光束角Beam Angle	15°		
材质Material	铝材Aluminum		

单位 Units:mm





## LED Spot Light Series LED天花射灯系列



型号Item NO	BRL-D951-5W	BRL-D951-12W	BRL-D951-15W
尺寸Size	Φ 80XH60mm	Φ 105XH65mm	Φ 128XH70mm
开孔Cutting	Φ 65mm	Φ 85mm	Φ 105mm
功率Power	5W	12W	15W
输入电压Input	85-265V		
色温Color Temperature	2700K/3000K/4000K/6000K		
显指C.R.I	80/90Ra		
光束角Beam Angle	24°		
材质Material	铝材Aluminum		

单位 Units:mm



型号Item NO	BRL-D961-5W	BRL-D961-12W	BRL-D961-15W
尺寸Size	Φ 83XH70mm	Φ 105XH85mm	Φ 140XH95mm
开孔Cutting	Φ 75mm	Φ 95mm	Φ 130mm
功率Power	5W	12W	15W
输入电压Input	85-265V		
色温Color Temperature	2700K/3000K/4000K/6000K		
显指C.R.I	80/90Ra		
光束角Beam Angle	24°		
材质Material	铝材Aluminum		

单位 Units:mm



型号Item NO	BRL-D967-5W	BRL-D967-12W	BRL-D967-15W
尺寸Size	Φ 95XH55mm	Φ 120XH65mm	Φ 145XH70mm
开孔Cutting	Φ 80mm	Φ 105mm	Φ 130mm
功率Power	5W	12W	15W
输入电压Input	85-265V		
色温Color Temperature	2700K/3000K/4000K/6000K		
显指C.R.I	80/90Ra		
光束角Beam Angle	24°		
材质Material	铝材Aluminum		

单位 Units:mm



# LED Spot Light Series LED天花射灯系列



型号Item NO	尺寸Size	开孔Cutting	功率Power	输入电压Input	色温Color Temperature	显指C.R.I	光束角Beam Angle	材质Material
<b>BRL-194-9570-7W</b>	Φ95XH70mm	Φ70mm	7W	85-265V	2700K/3000K/ 4000K/6000K	82Ra	30°	铝材 Aluminum
<b>BRL-194-11188-10W</b>	Φ111XH88mm	Φ80mm	10W	85-265V	2700K/3000K/ 4000K/6000K	82Ra	24° 36°	铝材 Aluminum
<b>BRL-194-119103-15W</b>	Φ119XH103mm	Φ90mm	15W	85-265V	2700K/3000K/ 4000K/6000K	82Ra	15° 24° 38° 60°	铝材 Aluminum
<b>BRL-194-142118-20W</b>	Φ142XH118mm	Φ110mm	20W	85-265V	2700K/3000K/ 4000K/6000K	82Ra	24° 60°	铝材 Aluminum
<b>BRL-194-150126-25W</b>	Φ150XH126mm	Φ110mm	25W	85-265V	2700K/3000K/ 4000K/6000K	82Ra	24° 40° 60°	铝材 Aluminum
<b>BRL-194-180128-30W</b>	Φ180XH128.5mm	Φ145mm	30W	85-265V	2700K/3000K/ 4000K/6000K	82Ra	24° 40° 60°	铝材 Aluminum
<b>BRL-194-180148-40W</b>	Φ180XH148.5mm	Φ145mm	40W	85-265V	2700K/3000K/ 4000K/6000K	82Ra	24° 40° 60°	铝材 Aluminum
<b>BRL-194-194129-40W</b>	Φ194XH129mm	Φ158mm	40W	85-265V	2700K/3000K/ 4000K/6000K	82Ra	24° 40° 60°	铝材 Aluminum
<b>BRL-194-194149-50W</b>	Φ194XH149mm	Φ158mm	50W	85-265V	2700K/3000K/ 4000K/6000K	82Ra	24° 40° 60°	铝材 Aluminum
<b>BRL-194-233129-50W</b>	Φ233XH129mm	Φ210mm	50W	85-265V	2700K/3000K/ 4000K/6000K	82Ra	24° 45° 60°	铝材 Aluminum
<b>BRL-194-233129-60W</b>	Φ233XH149mm	Φ210mm	60W	85-265V	2700K/3000K/ 4000K/6000K	82Ra	24° 45° 60°	铝材 Aluminum

单位 Units:mm





# LED Spot Light Series LED天花射灯系列



型号Item NO	BRL-SL-1188-10W	BRL-SL-1188-15W	BRL-SL-1188-20W	BRL-SL-1188-30W
尺寸Size	Φ90XH80mm	Φ110XH90mm	Φ135XH105mm	Φ165XH138mm
开孔Cutting	Φ85mm	Φ98mm	Φ120mm	Φ148mm
功率Power	10W	15W	20W	30W
输入电压Input	85-265V			
色温Color Temperature	3000K/4000K/6000K			
显指C.R.I	80/90Ra			
光束角Beam Angle	24°			
材质Material	铝材Aluminum			

单位 Units:mm



## 型号 Item NO: BRL-SL-1189-15W

尺寸Size: Φ130XH75mm  
 开孔Cutting: Φ120mm  
 功率Power: 15W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 80/90Ra  
 光束角Beam Angle: 24°  
 材质Material: 铝材Aluminum


单位 Units:mm



## 型号 Item NO: BRL-SL-1190-12W

尺寸Size: Φ115XH75mm  
 开孔Cutting: Φ100mm  
 功率Power: 12W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 80/90Ra  
 光束角Beam Angle: 24°  
 材质Material: 铝材Aluminum

单位 Units:mm



## 型号 Item NO: BRL-SL-1191-12W

尺寸Size: 115x115xH80mm  
 开孔Cutting: 100x100mm  
 功率Power: 12W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 80/90Ra  
 光束角Beam Angle: 24°  
 材质Material: 铝材Aluminum

单位 Units:mm





## LED Spot Light Series LED天花射灯系列



型号Item NO	尺寸Size	开孔Cutting	功率Power	输入电压Input	色温Color Temperature	显指C.R.I	光束角Beam Angle	材质Material
<b>BRL-SL-1152-3W</b>	Φ68XH63mm	Φ55mm	3W	85-265V	2700K/3000K/ 4000K/6000K	80/90Ra	24°	铝材 Aluminum
<b>BRL-SL-1152-5W</b>	Φ90XH65mm	Φ75mm	5W	85-265V	2700K/3000K/ 4000K/6000K	80/90Ra	24°	铝材 Aluminum
<b>BRL-SL-1152-10W</b>	Φ108XH70mm	Φ95mm	10W	85-265V	2700K/3000K/ 4000K/6000K	80/90Ra	24°	铝材 Aluminum
<b>BRL-SL-1152-20W</b>	Φ138XH75mm	Φ120mm	20W	85-265V	2700K/3000K/ 4000K/6000K	80/90Ra	30°	铝材 Aluminum
<b>BRL-SL-1152-30W</b>	Φ160XH80mm	Φ140mm	30W	85-265V	2700K/3000K/ 4000K/6000K	80/90Ra	30°	铝材 Aluminum

单位 Units:mm





# LED Spot Light Series

## LED天花射灯系列



型号Item NO	尺寸Size	开孔Cutting	功率Power	输入电压Input	色温Color Temperature	显指C.R.I	光束角Beam Angle	材质Material
BRL-SL-1142-5W	Φ100XH110mm	Φ85mm	57W	85-265V	2700K/3000K/4000K/6000K	80/90Ra	15° 24°	铝材 Aluminum
BRL-SL-1142-10W	Φ120XH110mm	Φ100mm	10W	85-265V	2700K/3000K/4000K/6000K	80/90Ra	15° 24°	铝材 Aluminum

单位 Units:mm



型号Item NO	尺寸Size	开孔Cutting	功率Power	输入电压Input	色温Color Temperature	显指C.R.I	光束角Beam Angle	材质Material
BRL-SL-1143-10W	Φ100XH95mm	Φ85mm	10W	85-265V	2700K/3000K/4000K/6000K	80/90Ra	15° 24°	铝材 Aluminum
BRL-SL-1143-20W	Φ120XH95mm	Φ100mm	20W	85-265V	2700K/3000K/4000K/6000K	80/90Ra	15° 24°	铝材 Aluminum
BRL-SL-1143-30W	Φ153XH95mm	Φ130mm	30W	85-265V	2700K/3000K/4000K/6000K	80/90Ra	15° 24°	铝材 Aluminum

单位 Units:mm



型号Item NO	BRL-SL-1146-5W
尺寸Size	Φ98XH55mm
开孔Cutting	Φ75mm
功率Power	5W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80/90Ra
光束角Beam Angle	15° 24°
材质Material	铝材Aluminum

单位 Units:mm








型号Item NO	<b>BRL-QL-203-12W 嵌入式</b>
尺寸Size	Φ98xH120mm
开孔Cutting	Φ75mm
功率Power	12W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80/90Ra
光束角Beam Angle	10° 20° 30°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	<b>BRL-QL-203F1-12W 嵌入式</b>
尺寸Size	100x100xH120mm
开孔Cutting	90mm
功率Power	12W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80/90Ra
光束角Beam Angle	10° 20° 30°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	<b>BRL-QL-303-25W 嵌入式</b>
尺寸Size	Φ130xH135mm
开孔Cutting	Φ120mm
功率Power	25W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80/90Ra
光束角Beam Angle	12° 24° 36° 45° 60°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	<b>BRL-QL-303F1-25W 嵌入式</b>
尺寸Size	130x130xH135mm
开孔Cutting	120mm
功率Power	25W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80/90Ra
光束角Beam Angle	12° 24° 36° 45° 60°
材质Material	铝材Aluminum

单位 Units:mm



# LED Spot Light Series LED天花射灯系列




型号Item NO	BRL-QL-203F2-2x12W 嵌入式
尺寸Size	100x185xH120mm
开孔Cutting	175x90mm
功率Power	2x12W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80/90Ra
光束角Beam Angle	10° 20° 30°
材质Material	铝材Aluminum

单位 Units:mm




型号Item NO	BRL-QL-303F2-2x25W 嵌入式
尺寸Size	130x240xH135mm
开孔Cutting	120x230mm
功率Power	2x25W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80/90Ra
光束角Beam Angle	12° 24° 36° 45° 60°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	BRL-QL-201-12W 嵌入式
尺寸Size	Φ73xH118mm
开孔Cutting	Φ65mm
功率Power	12W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80/90Ra
光束角Beam Angle	10° 20° 30°
材质Material	铝材Aluminum

单位 Units:mm







XTD-A01



XTD-A02



XTD-A05




XTD-A10



XTD-A15

型号Item NO:	尺寸Size	开孔Cutting	功率Power	输入电压Input	色温Color Temperature	显指C.R.I	光束角Beam Angle	材质Material
<b>BRL-XTD-A01-2W</b>	45X45XH49mm	37X37mm	2W	85-265V	3000K/4000K /6000K	80Ra	15° 30° 45°	铝材 Aluminum
<b>BRL-XTD-A02-4W</b>	75X45XH49mm	68X37mm	4W					
<b>BRL-XTD-A05-10W</b>	146X45XH48mm	140X37mm	10W					
<b>BRL-XTD-A10-20W</b>	280X45XH48mm	273X37mm	20W					
<b>BRL-XTD-A15-30W</b>	413X45XH48mm	405X37mm	30W					

单位 Units:mm

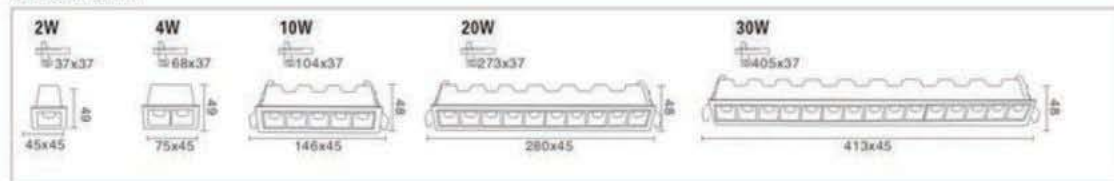






型号Item NO:	尺寸Size	开孔Cutting	功率Power	输入电压Input	色温Color Temperature	显指C.R.I	光束角Beam Angle	材质Material
<b>BRL-052A-5x2W梯型</b>	147X45XH50mm	139X37mm	5x2W	85-265V	2700K/3000K /4000K/6000K	80/90Ra	150°	铝材 Aluminum
<b>BRL-052A-10x2W梯型</b>	279X45XH50mm	272X37mm	10x2W					
<b>BRL-052A-15x2W梯型</b>	411X45XH50mm	403X37mm	15x2W					

单位 Units:mm

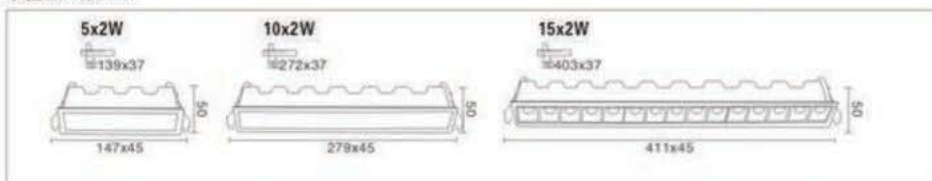



MR16 surface ring series  
MR16 面环系列



型号Item NO	尺寸Size	开孔Cutting	可调角度Adjustable	材质Material
BRL-DH-1-R-A	Φ90xH40mm	Φ72mm	YES	铝材 Aluminum



型号Item NO	尺寸Size	开孔Cutting	可调角度Adjustable	材质Material
BRL-DH-1-R-B	Φ90xH40mm	Φ72mm	YES	铝材 Aluminum



型号Item NO	尺寸Size	开孔Cutting	可调角度Adjustable	材质Material
BRL-DH-2-A	Φ90xH55mm	Φ73mm	YES	铝材 Aluminum



型号Item NO	尺寸Size	开孔Cutting	可调角度Adjustable	材质Material
BRL-DH-2-B	Φ90xH55mm	Φ73mm	YES	铝材 Aluminum



型号Item NO	尺寸Size	开孔Cutting	可调角度Adjustable	材质Material
BRL-DH-3-C	Φ90xH55mm	Φ73mm	YES	铝材 Aluminum



型号Item NO	尺寸Size	开孔Cutting	可调角度Adjustable	材质Material
BRL-DH-3-D	Φ90xH55mm	Φ73mm	YES	铝材 Aluminum

MR16 surface ring series  
MR16 面环系列



型号Item NO	尺寸Size	开孔Cutting	可调角度Adjustable	材质Material
BRL-DH-3-E	Φ90xH55mm	Φ73mm	YES	铝材 Aluminum



型号Item NO	尺寸Size	开孔Cutting	可调角度Adjustable	材质Material
BRL-DH-1-12	Φ80xH45mm	Φ70mm	YES	铝材 Aluminum



型号Item NO	尺寸Size	开孔Cutting	可调角度Adjustable	材质Material
BRL-DH-6-S-CR	85x85xH50mm	Φ70mm	YES	铝材 Aluminum



型号Item NO	尺寸Size	开孔Cutting	可调角度Adjustable	材质Material
BRL-DH-6-R-WH	Φ83xH55mm	Φ73mm	YES	铝材 Aluminum



型号Item NO	尺寸Size	开孔Cutting	可调角度Adjustable	材质Material
BRL-DH-6-R-WH	85x85xH50mm	Φ70mm	YES	铝材 Aluminum



型号Item NO	尺寸Size	开孔Cutting	可调角度Adjustable	材质Material
BRL-DH-6-CR	Φ83xH50mm	Φ70mm	YES	铝材 Aluminum





MR16 surface ring series  
MR16 面环系列



型号Item NO	尺寸Size	开孔Cutting	可调角度Adjustable	材质Material
BRL-DH-7-R	Φ93xH27mm	Φ75mm	YES	铝材 Aluminum



型号Item NO	尺寸Size	开孔Cutting	可调角度Adjustable	材质Material
BRL-135-Z16	98x98mm	90x90mm	YES	铝材 Aluminum



型号Item NO	尺寸Size	开孔Cutting	可调角度Adjustable	材质Material
BRL-XMH18	Φ100xH40mm	Φ90mm	YES	铝材 Aluminum



型号Item NO	尺寸Size	开孔Cutting	可调角度Adjustable	材质Material
BRL-135-2Z16	183x98mm	168x90mm	YES	铝材 Aluminum



型号Item NO	尺寸Size	开孔Cutting	可调角度Adjustable	材质Material
BRL-135-3Z16	270x98mm	255x90mm	YES	铝材 Aluminum



型号Item NO	尺寸Size	开孔Cutting	可调角度Adjustable	材质Material
BRL-288A16	Φ106xH38mm	Φ85mm	YES	铝材 Aluminum

MR16 surface ring series  
MR16 面环系列



型号Item NO	尺寸Size	开孔Cutting	可调角度Adjustable	材质Material
BRL-309A16	111x111xH38mm	Φ93mm	YES	铝材 Aluminum



型号Item NO	尺寸Size	开孔Cutting	可调角度Adjustable	材质Material
BRL-DH-12	Φ92xH45mm	Φ84mm	YES	铝材 Aluminum



型号Item NO	尺寸Size	开孔Cutting	可调角度Adjustable	材质Material
BRL-DH-13	90x90xH45mm	80x80mm	YES	铝材 Aluminum



型号Item NO	尺寸Size	开孔Cutting	可调角度Adjustable	材质Material
BRL-DH-14	Φ90xH68mm	Φ76mm	YES	铝材 Aluminum



型号Item NO	尺寸Size	开孔Cutting	可调角度Adjustable	材质Material
BRL-DH-15	91x91xH69mm	78x78mm	YES	铝材 Aluminum



型号Item NO	尺寸Size	开孔Cutting	可调角度Adjustable	材质Material
BRL-T509	Φ100xH52mm	Φ83mm	YES	铝材 Aluminum



# LED Cabinet Recessed Light Series LED珠宝柜嵌灯系列




## 型号 Item NO: BRL-ZBD-065-1W

尺寸Size:  $\Phi 28 \times H 30 \text{mm}$   
开孔Cutting:  $\Phi 25 \text{mm}$   
功率Power: 1W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle: 15°  
材质Material: 铝材Aluminum



单位 Units: mm



## 型号 Item NO: BRL-ZBD-066-1W

尺寸Size:  $\Phi 30 \times H 35 \text{mm}$   
开孔Cutting:  $\Phi 25 \text{mm}$   
功率Power: 1W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle: 15°  
材质Material: 铝材Aluminum



单位 Units: mm




## 型号 Item NO: BRL-ZBD-020-1W

尺寸Size:  $\Phi 32 \times H 20 \text{mm}$   
开孔Cutting:  $\Phi 28 \text{mm}$   
功率Power: 1W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle: 15°  
材质Material: 铝材Aluminum



单位 Units: mm





LED Cabinet Recessed Light Series  
LED珠宝柜嵌灯系列




型号 Item NO: BRL-ZBD-021S-1W

尺寸Size: 30X30xH20mm  
开孔Cutting:  $\Phi$ 28mm  
功率Power: 1W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle: 15°  
材质Material: 铝材Aluminum



单位 Units:mm



型号 Item NO: BRL-ZBD-062A-1W

尺寸Size:  $\Phi$ 34XH23mm  
开孔Cutting:  $\Phi$ 28mm  
功率Power: 1W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle: 15° 24°  
材质Material: 铝材Aluminum



单位 Units:mm



型号 Item NO: BRL-ZBD-063-1W

尺寸Size:  $\Phi$ 35XH23mm  
开孔Cutting:  $\Phi$ 28mm  
功率Power: 1W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle: 15° 24°  
材质Material: 铝材Aluminum



单位 Units:mm



型号 Item NO: BRL-ZBD-064-3W

尺寸Size:  $\Phi$ 37XH32mm  
开孔Cutting:  $\Phi$ 34mm  
功率Power: 3W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle: 24°  
材质Material: 铝材Aluminum



单位 Units:mm





## LED Cabinet Recessed Light Series LED珠宝柜嵌灯系列



### 型号 Item NO: BRL-ZBD-067-3W

尺寸Size:  $\Phi 40 \times H 48 \text{mm}$   
开孔Cutting:  $\Phi 35 \text{mm}$   
功率Power: 3W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle:  $24^\circ$   
材质Material: 铝材Aluminum



单位 Units: mm



### 型号 Item NO: BRL-ZBD-068-3W

尺寸Size:  $\Phi 35 \times H 45 \text{mm}$   
开孔Cutting:  $\Phi 30 \text{mm}$   
功率Power: 3W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle:  $24^\circ$   
材质Material: 铝材Aluminum



单位 Units: mm




### 型号 Item NO: BRL-ZBD-081-3W

尺寸Size:  $\Phi 48 \times H 35 \text{mm}$   
开孔Cutting:  $\Phi 35 \text{mm}$   
功率Power: 3W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle:  $24^\circ$   
材质Material: 铝材Aluminum



单位 Units: mm

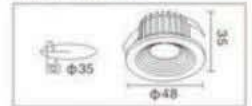


### 型号 Item NO: BRL-ZBD-008-3W

尺寸Size:  $\Phi 48 \times H 31 \text{mm}$   
开孔Cutting:  $\Phi 38 \text{mm}$   
功率Power: 3W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle:  $15^\circ$   
材质Material: 铝材Aluminum



单位 Units: mm

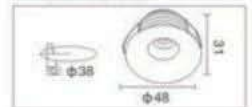

LED Cabinet Recessed Light Series  
LED珠宝柜嵌灯系列



**型号 Item NO: BRL-ZBD-009-3W**

尺寸Size:  $\Phi 47 \times H 31 \text{mm}$   
 开孔Cutting:  $\Phi 38 \text{mm}$   
 功率Power: 3W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle:  $15^\circ$   
 材质Material: 铝材Aluminum



单位 Units:mm



**型号 Item NO: BRL-ZBD-010-3W**

尺寸Size:  $\Phi 48 \times H 31 \text{mm}$   
 开孔Cutting:  $\Phi 38 \text{mm}$   
 功率Power: 3W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle:  $15^\circ$   
 材质Material: 铝材Aluminum



单位 Units:mm



**型号 Item NO: BRL-ZBD-020H**

尺寸Size:  $45 \times 45 \times H 30 \text{mm}$   
 开孔Cutting:  $\Phi 40 \text{mm}$   
 功率Power: 3W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle:  $15^\circ$   
 材质Material: 铝材Aluminum



单位 Units:mm







# LED Cabinet Recessed Light Series LED珠宝柜嵌灯系列




## 型号 Item NO: BRL-ZBD-037-3W

尺寸Size:  $\Phi 46 \times H 35 \text{mm}$   
开孔Cutting:  $\Phi 35 \text{mm}$   
功率Power: 3W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I.: 82Ra  
光束角Beam Angle: 15°  
材质Material: 铝材Aluminum



单位 Units:mm

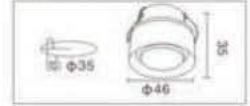


## 型号 Item NO: BRL-ZBD-038-3W

尺寸Size:  $46 \times 46 \times H 35 \text{mm}$   
开孔Cutting:  $\Phi 35 \text{mm}$   
功率Power: 3W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I.: 82Ra  
光束角Beam Angle: 15°  
材质Material: 铝材Aluminum



单位 Units:mm

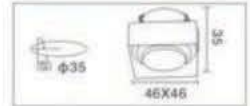


## 型号 Item NO: BRL-ZBD-039-3W

尺寸Size:  $\Phi 42 \times H 28 \text{mm}$   
开孔Cutting:  $\Phi 36 \text{mm}$   
功率Power: 3W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I.: 82Ra  
光束角Beam Angle: 15°  
材质Material: 铝材Aluminum



单位 Units:mm

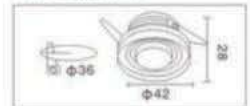


## 型号 Item NO: BRL-ZBD-045-3W

尺寸Size:  $\Phi 50 \times H 40 \text{mm}$   
开孔Cutting:  $\Phi 35 \text{mm}$   
功率Power: 3W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I.: 82Ra  
光束角Beam Angle: 15°  
材质Material: 铝材Aluminum



单位 Units:mm

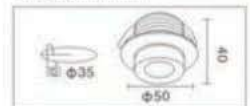


## 型号 Item NO: BRL-ZBD-044-3W

尺寸Size:  $\Phi 48 \times H 30 \text{mm}$   
开孔Cutting:  $\Phi 35 \text{mm}$   
功率Power: 3W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I.: 82Ra  
光束角Beam Angle: 15°  
材质Material: 铝材Aluminum



单位 Units:mm

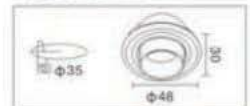

LED Cabinet Recessed Light Series  
LED珠宝柜嵌灯系列




型号 Item NO: BRL-ZBD-010-3W

尺寸Size:  $\Phi 48 \times H 31 \text{mm}$   
 开孔Cutting:  $\Phi 38 \text{mm}$   
 功率Power: 3W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle:  $15^\circ$   
 材质Material: 铝材Aluminum



单位 Units:mm



型号 Item NO: BRL-ZBD-009-3W

尺寸Size:  $\Phi 47 \times H 31 \text{mm}$   
 开孔Cutting:  $\Phi 38 \text{mm}$   
 功率Power: 3W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle:  $15^\circ$   
 材质Material: 铝材Aluminum



单位 Units:mm



型号 Item NO: BRL-ZBD-059-3W

尺寸Size:  $\Phi 63 \times H 30 \text{mm}$   
 开孔Cutting:  $\Phi 50 \text{mm}$   
 功率Power: 3W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle:  $15^\circ$   
 材质Material: 铝材Aluminum



单位 Units:mm





## LED Cabinet Recessed Light Series LED珠宝柜嵌灯系列




### 型号 Item NO: BRL-ZBD-017-3W

尺寸Size:  $\Phi 55 \times H 40 \text{mm}$   
开孔Cutting:  $\Phi 45 \text{mm}$   
功率Power: 3W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle:  $15^\circ$   
材质Material: 铝材Aluminum



单位 Units:mm

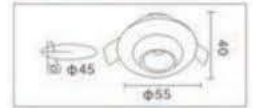


### 型号 Item NO: BRL-ZBD-019-3W

尺寸Size:  $60 \times 60 \times H 40 \text{mm}$   
开孔Cutting:  $\Phi 47 \text{mm}$   
功率Power: 3W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle:  $15^\circ$   
材质Material: 铝材Aluminum



单位 Units:mm

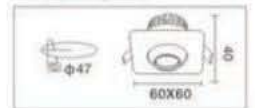

### 型号 Item NO: BRL-ZBD-001-1W

尺寸Size:  $\Phi 36 \times H 23 \text{mm}$   
开孔Cutting:  $\Phi 33 \text{mm}$   
功率Power: 1W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle:  $15^\circ$   
材质Material: 铝材Aluminum



单位 Units:mm





LED Cabinet Recessed Light Series  
LED珠宝柜嵌灯系列




型号 Item NO: BRL-ZBD-001-3W

尺寸Size:  $\Phi 48 \times H 40 \text{mm}$   
 开孔Cutting:  $\Phi 40 \text{mm}$   
 功率Power: 3W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle:  $15^\circ$   
 材质Material: 铝材Aluminum



单位 Units: mm



型号 Item NO: BRL-ZBD-003-1W

尺寸Size:  $\Phi 40 \times H 24 \text{mm}$   
 开孔Cutting:  $\Phi 35 \text{mm}$   
 功率Power: 1W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle:  $15^\circ$   
 材质Material: 铝材Aluminum



单位 Units: mm




型号 Item NO: BRL-ZBD-060-3W

尺寸Size:  $\Phi 45 \times H 40 \text{mm}$   
 开孔Cutting:  $\Phi 35 \text{mm}$   
 功率Power: 3W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle:  $24^\circ$   
 材质Material: 铝材Aluminum



单位 Units: mm



型号 Item NO: BRL-ZBD-061-3W

尺寸Size:  $\Phi 60 \times H 33 \text{mm}$   
 开孔Cutting:  $\Phi 35 \text{mm}$   
 功率Power: 3W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle:  $24^\circ$   
 材质Material: 铝材Aluminum



单位 Units: mm





LED Cabinet Recessed Light Series  
LED珠宝柜嵌灯系列



型号Item NO	尺寸Size	开孔Cutting	功率Power	输入电压Input	色温Color Temperature	显指C.R.I	光束角Beam Angle	材质Material
BRL-ZBD-069-3W	Φ75XH18mm	吸顶式	3W	85-265V	3000K/4000K /6000K	82Ra	15°	铝材 Aluminum
BRL-ZBD-070-7W	Φ85XH18mm	吸顶式	7W					
BRL-ZBD-071-10W	Φ105XH23mm	吸顶式	10W					

单位 Units:mm





## DOWN LIGHT SERIES

### LED筒灯系列

#### 产品描述

LED筒灯是一种嵌入到天花板内光线下射式的照明灯具，无眩光。

同等亮度耗电为普通节能灯的1/4，降低了运营成本。

响应速度快，彻底消除了传统高压钠灯启动过程长的缺点。

#### 应用场所

广泛应用于酒店、商场、专卖店、展览馆、咖啡厅、KTV、

酒吧和其他室内照明场所等

#### ProductDescription

1. LED down light is a light luminaire which is embedded into the ceiling to shine, and no glare.

2. Both base on the same light. Compared with the common energy-efficient light, the light only takes 25% power consumptive, so it lows the operating costs.

3. For its high response, the light removes the weakness of traditional high power sodium lamp.

#### Applications

They are widely used in hotels, markets, shops, exhibition halls, museurms, coffee shops, KTVs, bars, the other indoor lighting rooms and so on,





LED Down Light Series  
LED筒灯系列



型号Item NO	尺寸Size	开孔Cutting	功率Power	输入电压Input	色温Color Temperature	显指C.R.I	光束角Beam Angle	材质Material
BRL-SL-1134-3W	Φ100XH35mm	Φ70mm	3W	85-265V	3000K/4000K /6000K	82Ra	120°	铝材 Aluminum
BRL-SL-1134-5W	Φ106XH45mm	Φ80mm	5W					
BRL-SL-1134-7W	Φ115XH50mm	Φ90mm	7W					
BRL-SL-1134-12W	Φ143XH55mm	Φ110mm	12W					
BRL-SL-1134-18W	Φ180XH55mm	Φ145mm	18W					
BRL-SL-1134-24W	Φ190XH55mm	Φ160mm	24W					
BRL-SL-1134-30W	Φ230XH55mm	Φ190mm	30W					

单位 Units:mm





# LED Down Light Series LED筒灯系列




型号Item NO	尺寸Size	开孔Cutting	功率Power	输入电压Input	色温Color Temperature	显指C.R.I	光束角Beam Angle	材质Material
BRL-11033-5W	Φ90XH50mm	Φ80mm	5W	85-265V	3000K/4000K /6000K	82Ra	120°	铝材 Aluminum
BRL-11033-7W	Φ110XH50mm	Φ95mm	7W					
BRL-11033-12W	Φ140XH50mm	Φ120mm	12W					
BRL-11033-15W	Φ160XH55mm	Φ145mm	15W					
BRL-11033-18W	Φ180XH55mm	Φ160mm	18W					
BRL-11033-24W	Φ230XH55mm	Φ200mm	24W					

单位 Units:mm




LED Panel Light Series  
LED平板灯系列

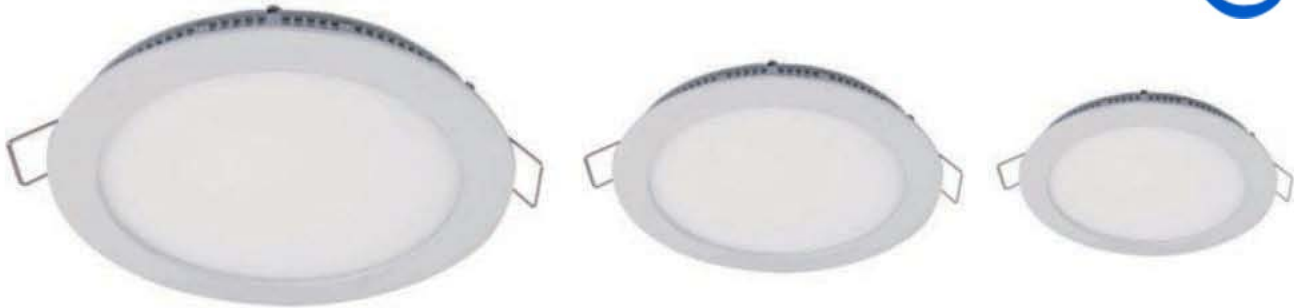

型号Item NO	尺寸Size	开孔Cutting	功率Power	输入电压Input	色温Color Temperature	显指C. R. I	光束角Beam Angle	材质Material
BRL-ANY3W	Φ86X20mm	Φ75mm	3W	85-265V	3000K/4000K /6000K	82Ra	150°	铝材 Aluminum
BRL-ANY4W	Φ105X20mm	Φ90mm	4W					
BRL-ANY6W	Φ120X20mm	Φ105mm	6W					
BRL-ANY9W	Φ146X20mm	Φ130mm	9W					
BRL-ANY12W	Φ170X20mm	Φ155mm	12W					
BRL-ANY15W	Φ200X20mm	Φ185mm	15W					
BRL-ANY18W	Φ225X20mm	Φ205mm	18W					
BRL-ANY24W	Φ300X20mm	Φ285mm	24W					

单位 Units:mm

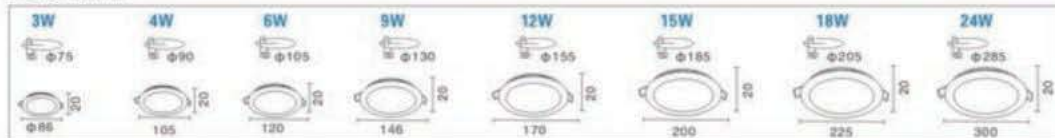

型号Item NO	尺寸Size	开孔Cutting	功率Power	输入电压Input	色温Color Temperature:	显指C. R. I:	光束角Beam Angle:	材质Material:
BRL-ANF3W	90X90X20mm	75X75mm	3W	85-265V	3000K/4000K /6000K	82Ra	150°	铝材 Aluminum
BRL-ANF4W	105X105X20mm	90X90mm	4W					
BRL-ANF6W	120X120X20mm	105X105mm	6W					
BRL-ANF9W	146X146X20mm	130X130mm	9W					
BRL-ANF12W	170X170X20mm	155X155mm	12W					
BRL-ANF15W	200X200X20mm	185X185mm	15W					
BRL-ANF18W	225X225X20mm	205X205mm	18W					
BRL-ANF24W	300X300X20mm	285X285mm	24W					

单位 Units:mm







LED Panel Light Series  
LED平板灯系列



型号Item NO	尺寸Size	开孔Cutting	功率Power	输入电压Input	色温Color Temperature	显指C.R.I	光束角Beam Angle	材质Material
BRL-ZBQ-R-5W	Φ75XH30mm	Φ68mm	5W	85-265V	3000K/4000K /6000K	82Ra	120°	铝材 Aluminum
BRL-ZBQ-R-8W	Φ88XH30mm	Φ75mm	8W					
BRL-ZBQ-R-16W	Φ145XH35mm	Φ130mm	16W					
BRL-ZBQ-R-22W	Φ170XH30mm	Φ150mm	22W					
BRL-ZBQ-R-30W	Φ220XH35mm	Φ200mm	30W					

单位 Units:mm



型号Item NO	尺寸Size	开孔Cutting	功率Power	输入电压Input	色温Color Temperature	显指C.R.I	光束角Beam Angle	材质Material
BRL-ZBQ-S-5W	75X75XH30mm	68X68mm	5W	85-265V	3000K/4000K /6000K	82Ra	120°	铝材 Aluminum
BRL-ZBQ-S-8W	88X88XH30mm	75X75mm	8W					
BRL-ZBQ-S-16W	145X145XH35mm	130X130mm	16W					
BRL-ZBQ-S-22W	170X170XH30mm	170X170mm	22W					
BRL-ZBQ-S-30W	220X220XH35mm	200X200mm	30W					

单位 Units:mm




LED Panel Light Series  
LED平板灯系列



型号Item NO	尺寸Size	开孔Cutting	功率Power	输入电压Input	色温Color Temperature	显指C.R.I	光束角Beam Angle	材质Material
BRL-ZPB-R-5W	Φ75XH27mm	吸顶式	5W	85-265V	3000K/4000K /6000K	82Ra	120°	铝材 Aluminum
BRL-ZPB-R-8W	Φ88XH27mm	吸顶式	8W					
BRL-ZPB-R-16W	Φ145XH26mm	吸顶式	16W					
BRL-ZPB-R-22W	Φ170XH26mm	吸顶式	22W					
BRL-ZPB-R-30W	Φ220XH26mm	吸顶式	30W					

单位 Units:mm

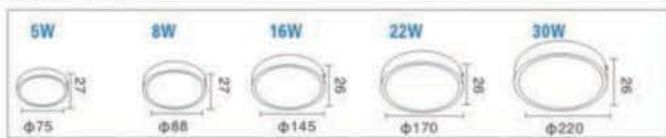

型号Item NO	尺寸Size	开孔Cutting	功率Power	输入电压Input	色温Color Temperature	显指C.R.I	光束角Beam Angle	材质Material
BRL-ZPB-S-5W	75X75XH27mm	吸顶式	5W	85-265V	3000K/4000K /6000K	82Ra	120°	铝材 Aluminum
BRL-ZPB-S-8W	88X88XH27mm	吸顶式	8W					
BRL-ZPB-S-16W	145X145XH26mm	吸顶式	16W					
BRL-ZPB-S-22W	170X170XH26mm	吸顶式	22W					
BRL-ZPB-S-30W	220X220XH26mm	吸顶式	30W					

单位 Units:mm





## LED Panel Light Series LED平板灯系列




型号Item NO	BRL-MNY 6W	BRL-MNY 12W	BRL-MNY 18W	BRL-MNY 24W
尺寸Size	Φ120X40mm	Φ170X40mm	Φ225X40mm	Φ300X40mm
开孔Cutting	吸顶式	吸顶式	吸顶式	吸顶式
功率Power	6W	12W	18W	24W
输入电压Input	85-265V			
色温Color Temperature	3000K/4000K/6000K			
显指C.R.I	82Ra			
光束角Beam Angle	15° 25° 40° 60°			
材质Material	铝材Aluminum			

单位 Units:mm



型号Item NO	BRL-MNF 6W	BRL-MNF 12W	BRL-MNF 18W	BRL-MNF 24W
尺寸Size	120X120X40mm	170X170X40mm	225X225X40mm	300X300X40mm
开孔Cutting	吸顶式	吸顶式	吸顶式	吸顶式
功率Power	6W	12W	18W	24W
输入电压Input	85-265V			
色温Color Temperature	3000K/4000K/6000K			
显指C.R.I	82Ra			
光束角Beam Angle	15° 25° 40° 60°			
材质Material	铝材Aluminum			

单位 Units:mm

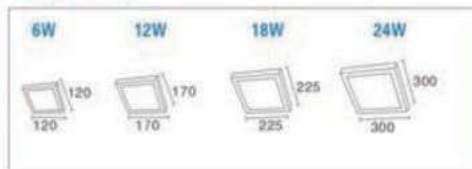






**型号 Item NO: BRL-300x300-12W**

尺寸Size: 300x300xH10mm  
 功率Power: 12W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I.: 82Ra  
 光束角Beam Angle: 155°  
 材质Material: 铝材Aluminum



**型号 Item NO: BRL-300x600-24W**

尺寸Size: 300x600xH10mm  
 功率Power: 24W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I.: 82Ra  
 光束角Beam Angle: 155°  
 材质Material: 铝材Aluminum




**型号 Item NO: BRL-600x600-36W**

尺寸Size: 600x600xH10mm  
 功率Power: 36W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I.: 82Ra  
 光束角Beam Angle: 155°  
 材质Material: 铝材Aluminum



**型号 Item NO: BRL-600x1200-72W**

尺寸Size: 600x1200xH10mm  
 功率Power: 72W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I.: 82Ra  
 光束角Beam Angle: 155°  
 材质Material: 铝材Aluminum

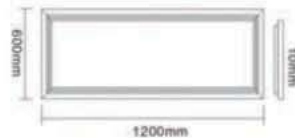

**型号 Item NO: BRL-300x1200-48W**


尺寸Size: 300x1200xH10mm  
 功率Power: 48W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I.: 82Ra  
 光束角Beam Angle: 155°  
 材质Material: 铝材Aluminum



**型号 Item NO: BRL-300x1200-36W**

尺寸Size: 300x1200xH10mm  
 功率Power: 36W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I.: 82Ra  
 光束角Beam Angle: 155°  
 材质Material: 铝材Aluminum



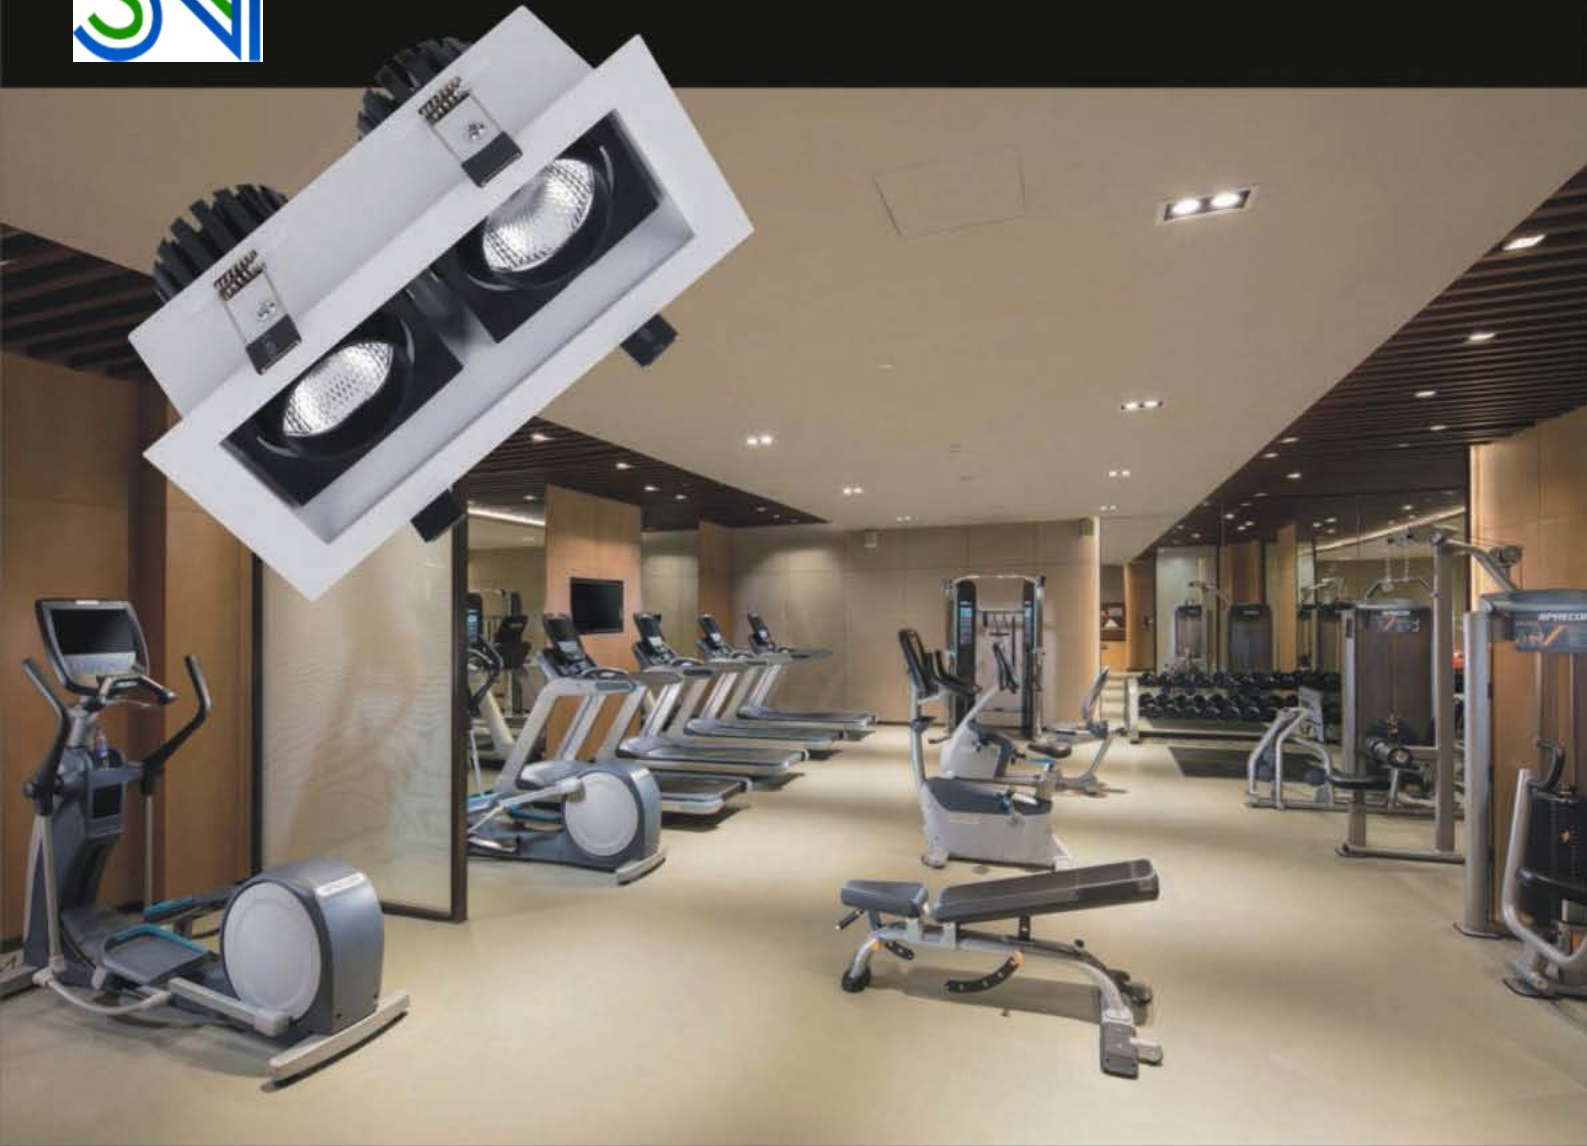

## LED Multiple Light Series LED格栅灯系列

应用场所：

广泛应用于酒店、商场、专卖店、展览馆、  
咖啡厅、KTV、酒吧和其他室内照明场所等。

### Applications

They are widely used in hotels, markets, shops, exhibition halls,  
museums, coffee shops, KTVs, bars, the other indoor lighting rooms and so on.

LED Multiple Light Series  
LED格栅灯系列



型号 Item NO: BRL-GS-01-10W

尺寸Size: 100X100XH85mm  
 开孔Cutting: 80X80mm  
 功率Power: 10W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 24°  
 材质Material: 铝材Aluminum



单位 Units:mm



型号 Item NO: BRL-GS-01-2x10W

尺寸Size: 180X100XH92mm  
 开孔Cutting: 165X80mm  
 功率Power: 2x10W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 24°  
 材质Material: 铝材Aluminum



单位 Units:mm




型号 Item NO: BRL-GS-01-3x10W

尺寸Size: 260X100XH92mm  
 开孔Cutting: 240X80mm  
 功率Power: 3x10W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 24°  
 材质Material: 铝材Aluminum



单位 Units:mm

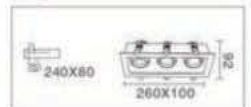





## LED Multiple Light Series LED格栅灯系列



型号Item NO	BRL-8030-5W	BRL-8030-10W	BRL-8030-15W
尺寸Size	125X125XH115mm	140X140XH130mm	165X165XH140mm
开孔Cutting	95X95mm	120X120mm	145X145mm
功率Power	5W	10W	15W
输入电压Input	85-265V		
色温Color Temperature	2700K/3000K/4000K/6000K		
显指C.R.I	80/90Ra		
光束角Beam Angle	15° 24° 38°		
材质Material	铝材Aluminum		

单位 Units:mm



型号Item NO	BRL-8030-2x5W	BRL-8030-2x10W	BRL-8030-2x15W
尺寸Size	225X125XH115mm	245X140XH130mm	310X165XH140mm
开孔Cutting	190X95mm	220X120mm	285X145mm
功率Power	2x5W	2x10W	2x15W
输入电压Input	85-265V		
色温Color Temperature	2700K/3000K/4000K/6000K		
显指C.R.I	80/90Ra		
光束角Beam Angle	15° 24° 38°		
材质Material	铝材Aluminum		

单位 Units:mm



型号Item NO	BRL-8030-3x5W	BRL-8030-3x10W	BRL-8030-3x15W
尺寸Size	315X125XH115mm	345X140XH130mm	425X165XH140mm
开孔Cutting	285X95mm	325X120mm	405X145mm
功率Power	3x5W	3x10W	3x15W
输入电压Input	85-265V		
色温Color Temperature	2700K/3000K/4000K/6000K		
显指C.R.I	80/90Ra		
光束角Beam Angle	15° 24° 38°		
材质Material	铝材Aluminum		

单位 Units:mm



LED Multiple Light Series  
LED格栅灯系列



型号 Item NO: BRL-GS-02-10W

尺寸Size: 130X130mm  
开孔Cutting: 110X110mm  
功率Power: 10W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I: 80/90Ra  
光束角Beam Angle: 18° 38°  
材质Material: 铝材Aluminum



单位 Units:mm



型号 Item NO: BRL-GS-02-2x10W

尺寸Size: 225X130mm  
开孔Cutting: 205X110mm  
功率Power: 2X10W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I: 80/90Ra  
光束角Beam Angle: 18° 38°  
材质Material: 铝材Aluminum



单位 Units:mm



型号 Item NO: BRL-GS-02-3x10W

尺寸Size: 305X130mm  
开孔Cutting: 285X110mm  
功率Power: 3X10W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I: 80/90Ra  
光束角Beam Angle: 18° 38°  
材质Material: 铝材Aluminum



单位 Units:mm





# LED Multiple Light Series LED格栅灯系列



## 型号 Item NO: BRL-GS10-10W

尺寸Size: 112X112mm  
 开孔Cutting: 100X100mm  
 功率Power: 10W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 80/90Ra  
 光束角Beam Angle: 15° 24° 36°  
 材质Material: 铝材Aluminum



单位 Units:mm




## 型号 Item NO: BRL-GS10-2x10W

尺寸Size: 210X112mm  
 开孔Cutting: 200X100mm  
 功率Power: 2X10W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 80/90Ra  
 光束角Beam Angle: 15° 24° 36°  
 材质Material: 铝材Aluminum



单位 Units:mm

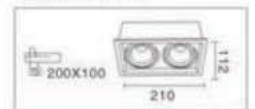

## 型号 Item NO: BRL-GS10-3x10W

尺寸Size: 280X112mm  
 开孔Cutting: 260X100mm  
 功率Power: 3X10W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 80/90Ra  
 光束角Beam Angle: 15° 24° 36°  
 材质Material: 铝材Aluminum



单位 Units:mm







## LED SURFACE MOUNTED DOWN LIGHT SERIES 明装筒灯系列

### 产品描述

LED明装筒灯是应用新型LED照明光源在传统筒灯基础上改良开发的产品。

与传统筒灯对比：节能、低碳、长寿、显色性好、响应速度快。

灯体精巧，完美的细节与做工，为您呈现精美的产品

### 应用场所

广泛应用于酒店、商场、博物馆、餐厅、办公室、家居照明等

### Product Description

1. LED surface mounted downlight is the product which adopts new LED lighting source on the base of traditional downlight.

2. Compared with traditional downlight: energy saving, low carbon, long life, perfect color rendering, fast speed of response.

3. The lamp body is exquisite, perfect details and workmanship, showing exquisite products for you.

### Applications

They are widely used in hotels, shopping malls, museums, restaurants, office, home furnishing lighting etc.

## LED Surface Mounted Downlight Series 明装筒灯系列



型号Item NO:	尺寸Size	功率Power	输入电压Input	色温Color Temperature	显指C.R.I	光束角Beam Angle	可调角度Adjustable	材质Material
<b>BRL-MZ-24-10W</b>	90xH90mm	10W	85-265V	2700K/3000K /4000K/6000K	80/90Ra	45°	NO	铝材 Aluminum
<b>BRL-MZ-24-20W</b>	110x110xH120mm	10W						
<b>BRL-MZ-24-30W</b>	130x130xH135mm	15W						
<b>BRL-MZ-24-40W</b>	160x160xH165mm	25W						

单位 Units:mm



型号Item NO:	尺寸Size	功率Power	输入电压Input	色温Color Temperature	显指C.R.I	光束角Beam Angle	可调角度Adjustable	材质Material
<b>BRL-MZ-25-10W</b>	Φ90xH90mm	10W	85-265V	2700K/3000K /4000K/6000K	80/90Ra	45°	NO	铝材 Aluminum
<b>BRL-MZ-25-15W</b>	Φ110xH120mm	15W						
<b>BRL-MZ-25-20W</b>	Φ130xH152mm	20W						
<b>BRL-MZ-25-30W</b>	Φ170xH185mm	30W						
<b>BRL-MZ-25-40W</b>	Φ193xH193mm	40W						


单位 Units:mm





型号Item NO	尺寸Size	功率Power	输入电压Input	色温Color Temperature	显指C.R.I	光束角Beam Angle	可调角度Adjustable	材质Material
BRL-MZ-38-A-7W反光杯	Φ75XH105mm	7W	85-265V	2700K/3000K/ 4000K/6000K	80/90Ra	24° 36°	NO	铝材 Aluminum
BRL-MZ-38-A-10W反光杯	Φ100XH110mm	10W	85-265V	2700K/3000K/ 4000K/6000K	80/90Ra	24° 36°	NO	铝材 Aluminum
BRL-MZ-38-A-15W反光杯	Φ100XH110mm	15W	85-265V	2700K/3000K/ 4000K/6000K	80/90Ra	24° 36°	NO	铝材 Aluminum
BRL-MZ-38-A-20W反光杯	Φ117XH142mm	20W	85-265V	2700K/3000K/ 4000K/6000K	80/90Ra	24° 36°	NO	铝材 Aluminum
BRL-MZ-38-A-30W反光杯	Φ137XH152mm	30W	85-265V	2700K/3000K/ 4000K/6000K	80/90Ra	24° 36°	NO	铝材 Aluminum
BRL-MZ-38-B-7W透镜款	Φ75XH105mm	7W	85-265V	2700K/3000K/ 4000K/6000K	80/90Ra	24°	NO	铝材 Aluminum
BRL-MZ-38-B-10W透镜款	Φ100XH110mm	10W	85-265V	2700K/3000K/ 4000K/6000K	80/90Ra	24°	NO	铝材 Aluminum
BRL-MZ-38-B-15W透镜款	Φ100XH110mm	15W	85-265V	2700K/3000K/ 4000K/6000K	80/90Ra	24°	NO	铝材 Aluminum
BRL-MZ-38-B-20W透镜款	Φ117XH142mm	20W	85-265V	2700K/3000K/ 4000K/6000K	80/90Ra	24°	NO	铝材 Aluminum
BRL-MZ-38-B-30W透镜款	Φ137XH152mm	30W	85-265V	2700K/3000K/ 4000K/6000K	80/90Ra	24°	NO	铝材 Aluminum

单位 Units:mm

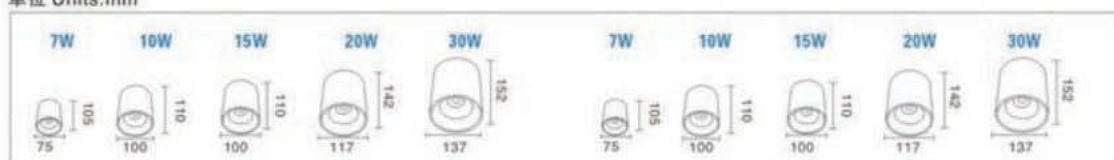



# LED Surface Mounted Downlight Series 明装筒灯系列



型号Item NO	BRL-MZ-33-10W	BRL-MZ-33-15W
尺寸Size	66x66xH140mm	100x100xH140mm
功率Power	10W	15W
输入电压Input	85-265V	
色温Color Temperature	2700K/3000K/4000K/6000K	
显指C.R.I	80/90Ra	
光束角Beam Angle	24°	
材质Material	铝材Aluminum	
可调角度 (Adjustable)	NO	

单位 Units:mm



型号Item NO	BRL-MZ-31-A-15W	BRL-MZ-31-B-15W
尺寸Size	Φ100XH100mm	Φ100XH100mm
功率Power	15W	15W
输入电压Input	85-265V	
色温Color Temperature	2700K/3000K/4000K/6000K	
显指C.R.I	80/90Ra	
光束角Beam Angle	24°	
材质Material	铝材Aluminum	
可调角度 (Adjustable)	YES	

单位 Units:mm



型号Item NO	BRL-MZ-31-C-15W	BRL-MZ-31-C-20W	BRL-MZ-31-C-25W
尺寸Size	Φ95XH110mm	Φ110XH118mm	Φ110XH118mm
功率Power	15W	20W	25W
输入电压Input	85-265V		
色温Color Temperature	2700K/3000K/4000K/6000K		
显指C.R.I	80/90Ra		
光束角Beam Angle	24°		
材质Material	铝材Aluminum		
可调角度 (Adjustable)	YES		

单位 Units:mm





## LED Surface Mounted Downlight Series 明装筒灯系列



型号Item NO	BRL-TL-072-7W	BRL-TL-072-15W
尺寸Size	Φ65XH120mm	Φ80XH160mm
功率Power	7W	15W
输入电压Input	85-265V	
色温Color Temperature	2700K/3000K/4000K/6000K	
显指C.R.I	80/90Ra	
光束角Beam Angle	24°	
材质Material	铝材Aluminum	
可调角度 (Adjustable)	YES	

单位 Units:mm



型号Item NO	BRL-QL-202-12W
尺寸Size	Φ62XH160mm
功率Power	12W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80/90Ra
光束角Beam Angle	24°
材质Material	铝材Aluminum
可调角度 (Adjustable)	YES

单位 Units:mm



型号Item NO	BRL-MZ-65-15W	BRL-MZ-65-20W	BRL-MZ-65-30W
尺寸Size	Φ80XH110mm	Φ100XH110mm	Φ120XH110mm
功率Power	15W	20W	30W
输入电压Input	85-265V		
色温Color Temperature	2700K/3000K/4000K/6000K		
显指C.R.I	80/90Ra		
光束角Beam Angle	15° 24° 36°		
材质Material	铝材Aluminum		
可调角度 (Adjustable)	NO		

单位 Units:mm





型号Item NO:	尺寸Size	功率Power	输入电压Input	色温Color Temperature	显指C.R.I	光束角Beam Angle	可调角度Adjustable	材质Material
<b>BRL-MZ-28-5W</b>	Φ85xH61mm	5W	85-265V	2700K/3000K /4000K/6000K	80/90Ra	120°	NO	铝材 Aluminum
<b>BRL-MZ-28-10W</b>	Φ100xH70mm	10W						
<b>BRL-MZ-28-15W</b>	Φ120xH80mm	15W						
<b>BRL-MZ-28-20W</b>	Φ153xH90mm	20W						
<b>BRL-MZ-28-25W</b>	Φ170xH100mm	25W						
<b>BRL-MZ-28-35W</b>	Φ215xH120mm	35W						

单位 Units:mm







## LED Surface Mounted Downlight Series 明装筒灯系列



型号Item NO	BRL-MZ-66-5W	BRL-MZ-66-10W	BRL-MZ-66-10W
尺寸Size	Φ75XH120mm	Φ75XH120mm	Φ75XH135mm
功率Power	5W 可装MR16	10W 可装MR16	10W 可装MR16
输入电压Input	85-265V		
色温Color Temperature	2700K/3000K/4000K/6000K		
显指C.R.I	80/90Ra		
光束角Beam Angle	15° 24° 36° 55°		
材质Material	铝材Aluminum		
可调角度 (Adjustable)	NO		

单位 Units:mm



型号Item NO	BRL-MZ-67-10W	BRL-MZ-67-15W
尺寸Size	75X75XH140mm	75X75XH140mm
功率Power	10W 可装MR16	15W 可装MR16
输入电压Input	85-265V	
色温Color Temperature	2700K/3000K/4000K/6000K	
显指C.R.I	80/90Ra	
光束角Beam Angle	15° 24° 36° 55°	
材质Material	铝材Aluminum	
可调角度 (Adjustable)	NO	

单位 Units:mm



型号Item NO	BRL-TL-150-15W
尺寸Size	Φ70XH182mm
功率Power	15W
输入电压Input	85-265V
色温Color Temperature	3000K/4000K/6000K
显指C.R.I	80/90Ra
光束角Beam Angle	24°
材质Material	铝材Aluminum
可调角度 (Adjustable)	YES

单位 Units:mm



LED Surface Mounted Downlight Series  
明装筒灯系列



型号 Item NO: BRL-MZ-72-10W

尺寸Size: 82x82xH85mm  
 功率Power: 10W  
 输入电压Input: 220-240V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 80/90Ra  
 光束角Beam Angle: 24°  
 材质Material: 铝材Aluminum  
 灯体颜色: 白/黑/银  
 Color: White/ Black/ silver



单位 Units:mm



型号 Item NO: BRL-MZ-72-2x10W

尺寸Size: 82x158xH85mm  
 功率Power: 2x10W  
 输入电压Input: 220-240V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 80/90Ra  
 光束角Beam Angle: 24°  
 材质Material: 铝材Aluminum  
 灯体颜色: 白/黑/银  
 Color: White/ Black/ silver



单位 Units:mm





## LED Surface Mounted Downlight Series 明装筒灯系列



型号Item NO	BRL-MZ-63-5W	BRL-MZ-63-10W	BRL-MZ-63-15W	BRL-MZ-63-18W	BRL-MZ-63-20W	BRL-MZ-63-30W
尺寸Size	100X100XH100mm	100X100XH100mm	115X115XH140mm	130X130XH160mm	150X150XH180mm	150X150XH180mm
功率Power	5W 可装MR16	10W 可装MR16	15W	18W	20W	30W
输入电压Input	85-265V					
色温Color Temperature	2700K/3000K/4000K/6000K					
显指C.R.I	80/90Ra					
光束角Beam Angle	15° 24° 36°					
材质Material	铝材Aluminum					

单位 Units:mm



型号Item NO	BRL-MZ-63-2x5W	BRL-MZ-63-2x10W	BRL-MZ-63-2x15W	BRL-MZ-63-2x18W	BRL-MZ-63-2x20W	BRL-MZ-63-2x30W
尺寸Size	200X100XH100mm	200X100XH100mm	230X115XH140mm	260X130XH160mm	150X300XH180mm	150X300XH180mm
功率Power	2x5W 可装MR16	2x10W 可装MR16	2x15W	2x18W	2x20W	2x30W
输入电压Input	85-265V					
色温Color Temperature	2700K/3000K/4000K/6000K					
显指C.R.I	80/90Ra					
光束角Beam Angle	15° 24° 36°					
材质Material	铝材Aluminum					

单位 Units:mm



型号Item NO	BRL-MZ-63-3x5W	BRL-MZ-63-3x10W
尺寸Size	200X100XH100mm	200X100XH100mm
功率Power	3x5W 可装MR16	3x10W 可装MR16
输入电压Input	85-265V	
色温Color Temperature	2700K/3000K/4000K/6000K	
显指C.R.I	80/90Ra	
光束角Beam Angle	24° 60°	
材质Material	铝材Aluminum	

单位 Units:mm





# LED Surface Mounted Downlight Series 明装筒灯系列



型号Item NO	BRL-MZ-61-A-5W 防眩阶梯边框	BRL-MZ-61-A-10W 防眩阶梯边框
尺寸Size	100X100XH125mm	100X100XH125mm
功率Power	5W	10W
输入电压Input	85-265V	
色温Color Temperature	2700K/3000K/4000K/6000K	
显指C.R.I	80/90Ra	
光束角Beam Angle	24° 60°	
材质Material	铝材Aluminum	

单位 Units:mm



型号Item NO	BRL-MZ-61-A-2x5W 防眩阶梯边框	BRL-MZ-61-A-2x10W 防眩阶梯边框
尺寸Size	200X100XH125mm	200X100XH125mm
功率Power	2x5W	2x10W
输入电压Input	85-265V	
色温Color Temperature	2700K/3000K/4000K/6000K	
显指C.R.I	80/90Ra	
光束角Beam Angle	24° 60°	
材质Material	铝材Aluminum	

单位 Units:mm



型号Item NO	BRL-MZ-61-A-3x5W 防眩阶梯边框	BRL-MZ-61-A-3x10W 防眩阶梯边框
尺寸Size	285X100XH125mm	285X100XH125mm
功率Power	3x5W	3x10W
输入电压Input	85-265V	
色温Color Temperature	2700K/3000K/4000K/6000K	
显指C.R.I	80/90Ra	
光束角Beam Angle	24° 60°	
材质Material	铝材Aluminum	

单位 Units:mm





## LED Surface Mounted Downlight Series 明装筒灯系列



型号Item NO	BRL-MZ-61-B-5W 圆口边框	BRL-MZ-61-B-10W 圆口边框
尺寸Size	100X100XH125mm	100X100XH125mm
功率Power	5W	10W
输入电压Input	85-265V	
色温Color Temperature	2700K/3000K/4000K/6000K	
显指C.R.I	80/90Ra	
光束角Beam Angle	24° 60°	
材质Material	铝材Aluminum	

单位 Units:mm



型号Item NO	BRL-MZ-61-B-2x5W 防眩边框	BRL-MZ-61-B-2x10W 防眩边框
尺寸Size	200X100XH125mm	200X100XH125mm
功率Power	2x5W	2x10W
输入电压Input	85-265V	
色温Color Temperature	2700K/3000K/4000K/6000K	
显指C.R.I	80/90Ra	
光束角Beam Angle	24° 60°	
材质Material	铝材Aluminum	

单位 Units:mm



型号Item NO	BRL-MZ-61-B-3x5W 防眩边框	BRL-MZ-61-B-3x10W 防眩边框
尺寸Size	285X100XH125mm	285X100XH125mm
功率Power	3x5W	3x10W
输入电压Input	85-265V	
色温Color Temperature	2700K/3000K/4000K/6000K	
显指C.R.I	80/90Ra	
光束角Beam Angle	24° 60°	
材质Material	铝材Aluminum	

单位 Units:mm






## Ceiling lift line lamp series 吸顶吊线灯系列



### 明装/吊线


型号Item NO	BRL-MZ-64-7W	BRL-MZ-64-10W	BRL-MZ-64-10W
尺寸Size	Φ60XH200mm	Φ75XH300mm	Φ120XH300mm
功率Power	7W	10W	20W
输入电压Input	85-265V		
色温Color Temperature	2700K/3000K/4000K/6000K		
显指C.R.I	80/90Ra		
光束角Beam Angle	15° 24°		
材质Material	铝材Aluminum		
灯体颜色Color	黑/白White/Black		

### 单位 Units:mm

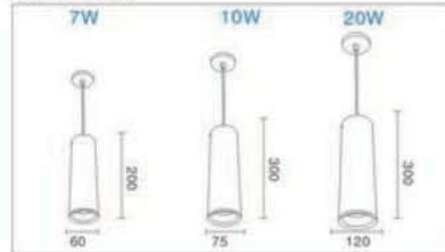

型号Item NO	BRL-MZ-55-10W	BRL-MZ-56-10W
尺寸Size	Φ55XH200mm	Φ55XH348mm
功率Power	10W	10W
输入电压Input	85-265V	
色温Color Temperature	2700K/3000K/4000K/6000K	
显指C.R.I	80/90Ra	
光束角Beam Angle	15° 24°	
材质Material	铝材Aluminum	
灯体颜色Color	黑/白White/Black	

### 单位 Units:mm

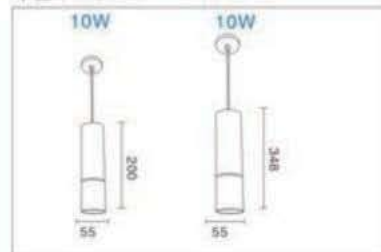




Ceiling lift line lamp series  
吸顶吊线灯系列




型号Item NO	BRL-MZ-70-7W	BRL-MZ-70-10W	BRL-MZ-70-15W	BRL-MZ-70-25W
尺寸Size	Φ55XH330mm	Φ75XH333mm	Φ100XH333mm	Φ115XH333mm
功率Power	7W	10W	15W	25W
输入电压Input	85-265V			
色温Color Temperature	2700K/3000K/4000K/6000K			
显指C.R.I	80/90Ra			
光束角Beam Angle	15° 24°			
材质Material	铝材Aluminum			

单位 Units:mm

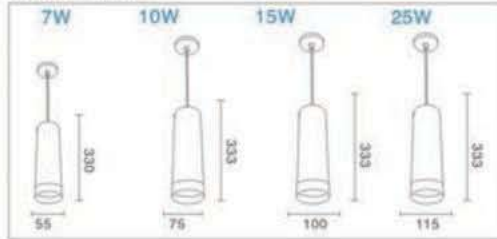

型号Item NO	BRL-MZ-51-A-3W	BRL-MZ-51-B-3W
尺寸Size	Φ25XH203mm	Φ25XH303mm
功率Power	3W	3W
输入电压Input	85-265V	
色温Color Temperature	2700K/3000K/4000K/6000K	
显指C.R.I	80/90Ra	
光束角Beam Angle	15°	
材质Material	铝材Aluminum	

单位 Units:mm

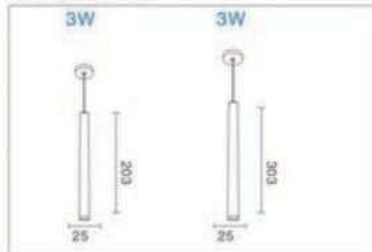

型号Item NO	BRL-MZ-53-12W	BRL-MZ-53-12W	BRL-MZ-53-12W
尺寸Size	57X57XH165mm	57X57XH215mm	57X57XH315mm
功率Power	12W	12W	12W
输入电压Input	85-265V		
色温Color Temperature	2700K/3000K/4000K/6000K		
显指C.R.I	80/90Ra		
光束角Beam Angle	15° 24°		
材质Material	铝材Aluminum		

单位 Units:mm





Ceiling lift line lamp series  
吸顶吊线灯系列



型号Item NO	BRL-MZ-76-5W	BRL-MZ-76-5W
尺寸Size	Φ55XH290mm	Φ55XH485mm
功率Power	5W	5W
输入电压Input	85-265V	
色温Color Temperature	3000K/4000K/6000K	
显指C.R.I	80/90Ra	
光束角Beam Angle	15° 24°	
材质Material	铝材Aluminum	
灯体颜色Color	黑/白/金/White/Black	

单位 Units:mm




Ceiling lift line lamp series  
吸顶吊线灯系列




型号Item NO	BRL-MZ-52-7W	BRL-MZ-52-10W
尺寸Size	Φ40XH308mm	Φ40XH607mm
功率Power	7W	10W
输入电压Input	85-265V	
色温Color Temperature	2700K/3000K/4000K/6000K	
显指C.R.I	80/90Ra	
光束角Beam Angle	15° 24°	
材质Material	铝材Aluminum	
灯体颜色Color	黑/白White/Black	

单位 Units:mm

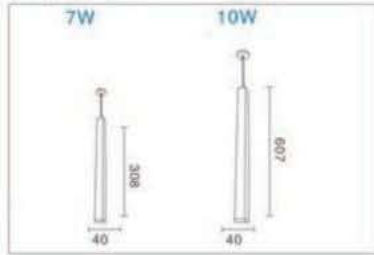

型号Item NO	BRL-MZ-57-7W	BRL-MZ-57-10W
尺寸Size	Φ40XH488mm	Φ40XH488mm
功率Power	7W	10W
输入电压Input	85-265V	
色温Color Temperature	2700K/3000K/4000K/6000K	
显指C.R.I	80/90Ra	
光束角Beam Angle	15° 24°	
材质Material	铝材Aluminum	
灯体颜色Color	黑/白White/Black	

单位 Units:mm

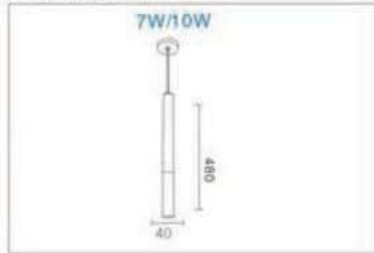






Ceiling lift line lamp series  
吸顶吊线灯系列




型号Item NO	<b>BRL-MZ-69-10W</b>
尺寸Size	40X40xH490mm
功率Power	10W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80/90Ra
光束角Beam Angle	15° 24°
材质Material	铝材Aluminum
灯体颜色Color	黑/白White/Black

单位 Units:mm

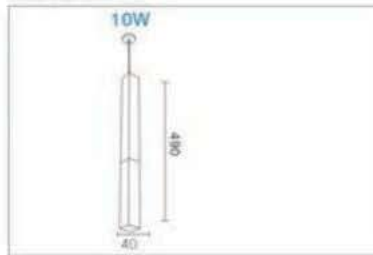

型号Item NO	<b>BRL-MZ-71-7W</b>
尺寸Size	Φ60XH260mm
功率Power	7W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80/90Ra
光束角Beam Angle	15° 24°
材质Material	铝材Aluminum
灯体颜色Color	黑/白White/Black

单位 Units:mm

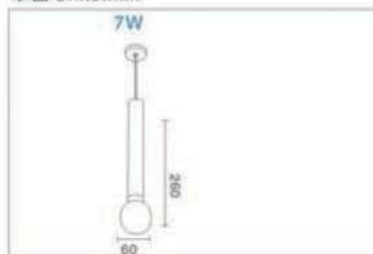



# LED TRACK SPOT LIGHT SERIES

## LED轨道射灯系列

### 产品描述

- ◇LED轨道射灯以LED为光源，冷光源，无辐射，发光效率高，低频闪。
- ◇灯具外壳采用优质铝材，散热性能优良。
- ◇灯具设计小巧精致，可任意调节方向，产品种类款式多样可供客户选择。

### 应用场所

广泛应用于商场、汽车展示、珠宝首饰、星级酒店、品牌服装、高档会所、博物馆、品牌营业厅、专业橱窗、等照明场所。

### Product Description

1. LED track spot lamp adopts LED as lighting source, cold lighting source, no radiation, high luminous efficiency, low frequency flicker.
2. The lamp shell adopts high quality aluminum, excellent heat dissipation.
3. The lamp design is exquisite, can be arbitrarily adjusted the direction, product with various types and diverse styles for customers to choose.

### Applications

They are widely used in shopping malls, car show, jewelry, stars hotel, brand clothing, high-grade club, museum exhibition hall, brand business hall, professional window, and other lighting places.


# LED Track Light Series

## LED轨道射灯系列



型号Item NO	BRL-TL-129-20W	BRL-TL-129-30W	BRL-TL-129-35W
尺寸Size	Φ80XH143mm	Φ100XH170mm	Φ100XH170mm
功率Power	20W	30W	35W
输入电压Input	85-265V		
色温Color Temperature	2700K/3000K/4000K/6000K		
显指C.R.I	80/90Ra		
光束角Beam Angle	透镜15° 24° 36° 反光杯15° 24°		
材质Material	铝材Aluminum		

单位 Units:mm



型号Item NO	BRL-TL-108-12W	BRL-TL-108-20W	BRL-TL-108-30W
尺寸Size	Φ72X93XH126mm	Φ87X126XH157mm	Φ98X136XH170mm
功率Power	12W	20W	30W
输入电压Input	85-265V		
色温Color Temperature	2700K/3000K/4000K/6000K		
显指C.R.I	80/90Ra		
光束角Beam Angle	15° 24° 36°		
材质Material	铝材Aluminum		

单位 Units:mm



型号Item NO	BRL-TL-109-12W	BRL-TL-109-20W	BRL-TL-109-30W
尺寸Size	Φ72X94XH140mm	Φ88X134XH170mm	Φ98X148XH182mm
功率Power	12W	20W	30W
输入电压Input	85-265V		
色温Color Temperature	2700K/3000K/4000K/6000K		
显指C.R.I	80/90Ra		
光束角Beam Angle	15° 24° 36°		
材质Material	铝材Aluminum		

单位 Units:mm







## LED Track Light Series LED轨道射灯系列




型号Item NO	BRL-TL-054-12W	BRL-TL-054-20W	BRL-TL-054-30W	BRL-TL-054-40W
尺寸Size	Φ62XH106mm	Φ85XH122mm	Φ92XH140mm	Φ114XH160mm
功率Power	12W	20W	30W	40W
输入电压Input	85-265V			
色温Color Temperature	2700K/3000K/4000K/6000K			
显指C.R.I	80/90Ra			
光束角Beam Angle	24°			
材质Material	铝材Aluminum			

单位 Units:mm



型号Item NO	BRL-TL-154-10W	BRL-TL-154-20W
尺寸Size	Φ88XH113mm	Φ100XH130mm
功率Power	10W	20W
输入电压Input	85-265V	
色温Color Temperature	2700K/3000K/4000K/6000K	
显指C.R.I	80/90Ra	
光束角Beam Angle	15° 24° 36°	
材质Material	铝材Aluminum	

单位 Units:mm

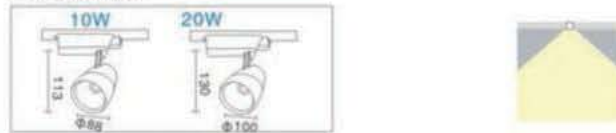

型号Item NO	BRL-TL-153-A-38W	BRL-TL-153-B-38W	BRL-TL-153-C-38W
尺寸Size	Φ108XH145X170mm	Φ108XH145X170mm	Φ108XH145X170mm
功率Power	38W	38W	38W
输入电压Input	85-265V		
色温Color Temperature	2700K/3000K/4000K/6000K		
显指C.R.I	80/90Ra		
光束角Beam Angle	15° 24° 36°		
材质Material	铝材Aluminum		

单位 Units:mm



# LED Track Light Series

## LED轨道射灯系列



型号Item NO	BRL-TL-122-10W	BRL-TL-122-20W	BRL-TL-122-30W
尺寸Size	Φ50XH130mm	Φ65XH160mm	Φ78XH185mm
功率Power	10W	20W	30W
输入电压Input	85-265V		
色温Color Temperature	2700K/3000K/4000K/6000K		
显指C.R.I	80/90Ra		
光束角Beam Angle	24°		
材质Material	铝材Aluminum		

单位 Units:mm



型号Item NO	BRL-TL-123-10W	BRL-TL-123-20W	BRL-TL-123-30W
尺寸Size	Φ65XH145mm	Φ75XH165mm	Φ95XH175mm
功率Power	10W	20W	30W
输入电压Input	85-265V		
色温Color Temperature	2700K/3000K/4000K/6000K		
显指C.R.I	80/90Ra		
光束角Beam Angle	15° - 60° 可调角度		
材质Material	铝材Aluminum		

单位 Units:mm



型号Item NO	BRL-TL-141-10W	BRL-TL-141-20W	BRL-TL-141-30W
尺寸Size	Φ65XH116mm	Φ75XH135mm	Φ95XH146mm
功率Power	10W	20W	30W
输入电压Input	85-265V		
色温Color Temperature	2700K/3000K/4000K/6000K		
显指C.R.I	80/90Ra		
光束角Beam Angle	15° 24°		
材质Material	铝材Aluminum		

单位 Units:mm






## LED Track Light Series LED轨道射灯系列



型号Item No2	BRL-TL-142-12W	BRL-TL-142-30W
尺寸Size	Φ63XH150mm	Φ86XH200mm
功率Power	12W	30W
输入电压Input	85-265V	
色温Color Temperature	2700K/3000K/4000K/6000K	
显指C.R.I	80/90Ra	
光束角Beam Angle	24°	
材质Material	铝材Aluminum	

单位 Units:mm

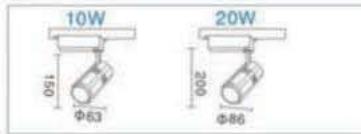

型号Item No2	BRL-TL-149-12W
尺寸Size	Φ55XH175mm
功率Power	12W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80/90Ra
光束角Beam Angle	24°
材质Material	铝材Aluminum

单位 Units:mm



型号Item NO	BRL-TL-143-20W	BRL-TL-143-30W	BRL-TL-143-35W
尺寸Size	Φ65XH140mm	Φ80XH160mm	Φ80XH180mm
功率Power	20W	30W	35W
输入电压Input	85-265V		
色温Color Temperature	2700K/3000K/4000K/6000K		
显指C.R.I	80/90Ra		
光束角Beam Angle	24°		
材质Material	铝材Aluminum		

单位 Units:mm





LED Track Light Series  
LED轨道射灯系列



型号 Item NO: BRL-TL-170-7W

尺寸Size:  $\Phi 42 \times H102 \text{mm}$   
 功率Power: 7W  
 输入电压Input: 85-265V  
 色温Color Temperature: 2700K/3000K/4000K/6000K  
 显指C.R.I: 80/90Ra  
 光束角Beam Angle:  $24^\circ$   
 材质Material: 铝材Aluminum



单位 Units:mm



型号 Item NO: BRL-TL-172-10W

尺寸Size:  $\Phi 50 \times H128 \text{mm}$   
 功率Power: 10W  
 输入电压Input: 85-265V  
 色温Color Temperature: 2700K/3000K/4000K/6000K  
 显指C.R.I: 80/90Ra  
 光束角Beam Angle:  $24^\circ$   
 材质Material: 铝材Aluminum



单位 Units:mm



型号 Item NO: BRL-TL-173-10W

尺寸Size:  $\Phi 60 \times H135 \text{mm}$   
 功率Power: 10W  
 输入电压Input: 85-265V  
 色温Color Temperature: 2700K/3000K/4000K/6000K  
 显指C.R.I: 80/90Ra  
 光束角Beam Angle:  $24^\circ$   
 材质Material: 铝材Aluminum



单位 Units:mm





## LED Track Light Series LED轨道射灯系列



型号Item NO	BRL-TL-163-7W	BRL-TL-163-10W	BRL-TL-163-15W	BRL-TL-163-20W
尺寸Size	Φ60XH110mm	Φ60XH110mm	Φ70XH120mm	Φ80XH130mm
功率Power	7W	10W	15W	20W
输入电压Input	85-265V			
色温Color Temperature	2700K/3000K/4000K/6000K			
显指C.R.I	80/90Ra			
光束角Beam Angle	15°			
材质Material	铝材Aluminum			

单位 Units:mm




型号Item NO	BRL-TL-161-15W	BRL-TL-161-30W
尺寸Size	Φ70XH120mm	Φ90XH145mm
功率Power	15W	30W
输入电压Input	85-265V	
色温Color Temperature	2700K/3000K/4000K/6000K	
显指C.R.I	80/90Ra	
光束角Beam Angle	15°	
材质Material	铝材Aluminum	

单位 Units:mm



型号Item NO	BRL-TL-175-25W	BRL-TL-175-30W	BRL-TL-175-50W
尺寸Size	Φ65XH140mm	Φ100XH143mm	Φ120XH150mm
功率Power	25W	30W	50W
输入电压Input	85-265V		
色温Color Temperature	2700K/3000K/4000K/6000K		
显指C.R.I	80/90Ra		
光束角Beam Angle	15° 24° 38°		
材质Material	铝材Aluminum		

单位 Units:mm

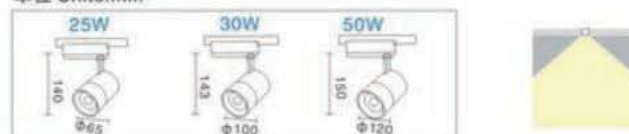

# LED Track Light Series

## LED轨道射灯系列



### 型号 Item NO: BRL-TL-176-25W

尺寸Size:  $\Phi 120 \times H150 \text{mm}$   
 功率Power: 25W  
 输入电压Input: 85-265V  
 色温Color Temperature: 2700K/3000K/4000K/6000K  
 显指C.R.I: 80/90Ra  
 光束角Beam Angle:  $24^\circ$   
 材质Material: 铝材Aluminum



单位 Units:mm



### 型号 Item NO: BRL-TL-183-20W/30W

尺寸Size:  $\Phi 115 \times 100 \times H210 \text{mm}$  /  $\Phi 115 \times 100 \times H210 \text{mm}$   
 功率Power: 20W/30W  
 输入电压Input: 85-265V  
 色温Color Temperature: 2700K/3000K/4000K/6000K  
 显指C.R.I: 80/90Ra  
 光束角Beam Angle:  $16^\circ$   
 材质Material: 铝材Aluminum



单位 Units:mm



### 型号 Item NO: BRL-TL-034-30W

尺寸Size:  $\Phi 185 \times 220 \times H340 \text{mm}$   
 功率Power: 30W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle:  $15^\circ$   $25^\circ$   $40^\circ$   $60^\circ$   
 材质Material: 铝材Aluminum  
 灯体颜色: 黑/白  
 Color: Black/White



单位 Units:mm







## LED Track Light Series LED轨道射灯系列




型号Item No2	BRL-TL-164-7W	BRL-TL-164-10W	BRL-TL-165-7W	BRL-TL-165-10W
尺寸Size	Φ50XH183mm	Φ55XH273mm	Φ50XH183mm	Φ55XH273mm
功率Power	7W	10W	7W	10W
输入电压Input	85-265V			
色温Color Temperature	2700K/3000K/4000K/6000K			
显指C.R.I	80/90Ra			
光束角Beam Angle	15° 24°			
材质Material	铝材Aluminum			

单位 Units:mm



型号Item NO	BRL-TL-148-10W	BRL-TL-148-20W	BRL-TL-148-30W
尺寸Size	Φ60XH95mm	Φ80XH135mm	Φ100XH142mm
功率Power	10W	20W	30W
输入电压Input	85-265V		
色温Color Temperature	2700K/3000K/4000K/6000K		
显指C.R.I	80/90Ra		
光束角Beam Angle	24°		
材质Material	铝材Aluminum		

单位 Units:mm

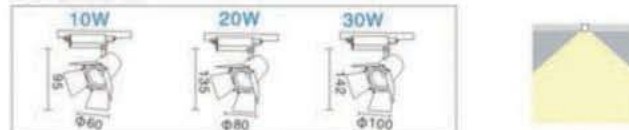

型号Item NO	BRL-TL-166-A-10W	BRL-TL-166-B-10W
尺寸Size	Φ55XH425mm	Φ55XH425mm-625mm伸缩可调
功率Power	10W	10W
输入电压Input	85-265V	
色温Color Temperature	2700K/3000K/4000K/6000K	
显指C.R.I	80/90Ra	
光束角Beam Angle	15° 24°	
材质Material	铝材Aluminum	

单位 Units:mm





# LED Track Light Series LED轨道射灯系列



## 型号 Item NO: BRL-PAR30-35W

尺寸Size:  $\Phi 95 \times 120 \text{mm}$   
功率Power: 35W(PAR30)  
输入电压Input: AC200-240V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle: 15° 24°



单位 Units:mm



## 型号 Item NO: BRL-PDK-2-35W

尺寸Size:  $\Phi 100 \times 150 \times \text{H}240 \text{mm}$   
功率Power: 35W ( PAR30 )  
输入电压Input: AC200-240V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle: 15° 24°  
材质Material: 铝材Aluminum  
灯体颜色: 黑/白  
Color: Black/White



单位 Units:mm



## 型号 Item NO: BRL-PDK-1-35W

尺寸Size:  $\Phi 120 \times 165 \times \text{H}230 \text{mm}$   
功率Power: 35W(PAR30)  
输入电压Input: AC200-240V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle: 15° 24°  
材质Material: 铝材Aluminum  
灯体颜色: 黑/白  
Color: Black/White



单位 Units:mm



## 型号 Item NO: BRL-PDK-3-35W

尺寸Size:  $\Phi 255 \times 320 \times \text{H}390 \text{mm}$   
功率Power: 35W(PAR30)  
输入电压Input: AC200-240V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle: 15° 24°  
材质Material: 铝材Aluminum  
灯体颜色: 黑/白  
Color: Black/White



单位 Units:mm



# LED Track Light Series

## LED轨道射灯系列



### 型号 Item NO: BRL-TL-058-35W

尺寸Size:  $\Phi 70 \times H 195 \text{mm}$   
 功率Power: 35W ( PAR30 )  
 输入电压Input: AC200-240V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 24°  
 材质Material: 铝材Aluminum  
 灯体颜色: 黑/白  
 Color: Black/White



### 型号 Item NO: BRL-TL-060-35W

尺寸Size:  $\Phi 100 \times 150 \times H 210 \text{mm}$   
 功率Power: 35W ( PAR30 )  
 输入电压Input: AC200-240V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 24°  
 材质Material: 铝材Aluminum  
 灯体颜色: 黑/白  
 Color: Black/White



### 型号 Item NO: BRL-DPAR30-35W

尺寸Size:  $\Phi 160 \times H 140 \text{mm}$   
 开孔Cutting:  $\Phi 145 \text{mm}$   
 功率Power: 35W ( PAR30 )  
 输入电压Input: AC200-240V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 24°  
 材质Material: 铝材Aluminum








二线路轨截面图



二线路轨



二线路二线路轨I型接驳轨

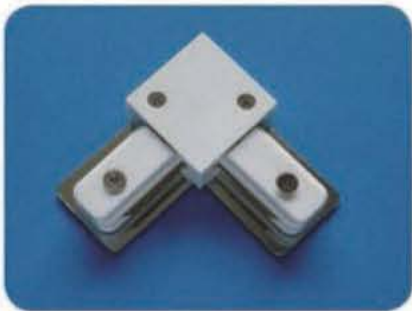

二线路轨L型接驳



二线路轨T型接驳



二线路轨X型接驳



三线路轨



三线路轨I型内接驳



三线路轨I型外接驳




单位 Units:mm



**型号 Item NO: BRL-B804B-5W**

尺寸Size:150X100XH100mm  
功率Power:5W  
输入电压Input:AC85-265V  
色温Color Temperature:3000K/4000K/6000K  
显指C.R.I:82Ra  
光束角Beam Angle:120°  
材质Material:铝材Aluminum  
灯体颜色:白/黑/银  
Color:White/Black/Silver



单位 Units:mm




**型号 Item NO: BRL-B801A-5W**

尺寸Size:150X60XH100mm  
功率Power:5W  
输入电压Input:AC85-265V  
色温Color Temperature:3000K/4000K/6000K  
显指C.R.I:82Ra  
光束角Beam Angle:120°  
材质Material:铝材Aluminum  
灯体颜色:白/黑  
Color:White/Black



单位 Units:mm




**型号 Item NO: BRL-B805B-10W**

尺寸Size:250X100XH100mm  
功率Power:10W  
输入电压Input:AC85-265V  
色温Color Temperature:3000K/4000K/6000K  
显指C.R.I:82Ra  
光束角Beam Angle:120°  
材质Material:铝材Aluminum  
灯体颜色:白/黑/银  
Color:White/Black/Silver



单位 Units:mm



**型号 Item NO: BRL-B802A-10W**

尺寸Size:250X60XH100mm  
功率Power:10W  
输入电压Input:AC85-265V  
色温Color Temperature:3000K/4000K/6000K  
显指C.R.I:82Ra  
光束角Beam Angle:120°  
材质Material:铝材Aluminum  
灯体颜色:白  
Color:White/Black




单位 Units:mm




**型号 Item NO: BRL-B806B-15W**

尺寸Size:350X100XH100mm  
功率Power:15W  
输入电压Input:AC85-265V  
色温Color Temperature:3000K/4000K/6000K  
显指C.R.I:82Ra  
光束角Beam Angle:120°  
材质Material:铝材Aluminum  
灯体颜色:白/黑/银  
Color:White/Black/Silver

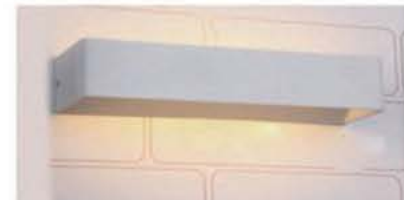

单位 Units:mm




**型号 Item NO: BRL-B803A-15W**

尺寸Size:350X60XH100mm  
功率Power:15W  
输入电压Input:AC85-265V  
色温Color Temperature:3000K/4000K/6000K  
显指C.R.I:82Ra  
光束角Beam Angle:120°  
灯体颜色Color:White/Black  
灯体颜色:白/黑  
Color:White/Black

LED Wall lamp Series  
LED壁灯系列



单位 Units:mm



**型号 Item NO:BRL-WL-13-2x3W**

尺寸Size:290X110XH50mm  
功率Power:2x3W  
输入电压Input:AC85-265V  
色温Color Temperature:3000K/4000K/6000K  
显指C.R.I:82Ra  
光束角Beam Angle:38°  
材质Material:铝材Aluminum  
灯体颜色:白/黑  
Color:White/Black



单位 Units:mm



**型号 Item NO:BRL-WL-22-10W**

尺寸Size:200XH45mm  
功率Power:10W  
输入电压Input:AC85-265V  
色温Color Temperature:3000K/4000K/6000K  
显指C.R.I:82Ra  
光束角Beam Angle:38°  
材质Material:铝材Aluminum  
灯体颜色:白/黑  
Color:White/Black



单位 Units:mm



**型号 Item NO:BRL-WL-12A-2x3W**

尺寸Size:290X110XH50mm  
功率Power:2x3W  
输入电压Input:AC85-265V  
色温Color Temperature:3000K/4000K/6000K  
显指C.R.I:82Ra  
光束角Beam Angle:38°  
材质Material:铝材Aluminum  
灯体颜色:白/黑  
Color:White/Black



单位 Units:mm



**型号 Item NO:BRL-WL-21-12W**

尺寸Size:200X160XH60mm  
功率Power:12W  
输入电压Input:AC85-265V  
色温Color Temperature:3000K/4000K/6000K  
显指C.R.I:82Ra  
光束角Beam Angle:38°  
材质Material:铝材Aluminum  
灯体颜色:白/黑  
Color:White/Black



单位 Units:mm




**型号 Item NO:BRL-WL-12B-2x3W**

尺寸Size:290X110XH50mm  
功率Power:2x3W  
输入电压Input:AC85-265V  
色温Color Temperature:3000K/4000K/6000K  
显指C.R.I:82Ra  
光束角Beam Angle:38°  
材质Material:铝材Aluminum  
灯体颜色:白/黑  
Color:White/Black



单位 Units:mm



**型号 Item NO:BRL-WL-20-12W**

尺寸Size:200X160XH60mm  
功率Power:12W  
输入电压Input:AC85-265V  
色温Color Temperature:3000K/4000K/6000K  
显指C.R.I:82Ra  
光束角Beam Angle:38°  
材质Material:铝材Aluminum  
灯体颜色:白/黑  
Color:White/Black






单位 Units:mm




**型号 Item NO: BRL-B856-6x2W**

尺寸Size: 170x45xH80mm  
 功率Power: 6x2W  
 输入电压Input: AC85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C. R. I: 82Ra  
 光束角Beam Angle: 38°  
 材质Material: 铝材Aluminum  
 灯体颜色: 白/黑  
 Color: White/Black

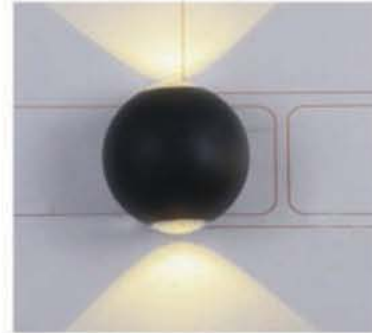


单位 Units:mm




**型号 Item NO: BRL-WL-26-2x3W**

尺寸Size: 110xH100mm  
 功率Power: 2x3W  
 输入电压Input: AC85-265V  
 色温Color Temperature: 2700K/3000K/4000K/6000K  
 显指C. R. I: 80/90Ra  
 光束角Beam Angle: 36°  
 材质Material: 铝材Aluminum  
 灯体颜色: 白/黑  
 Color: White/Black

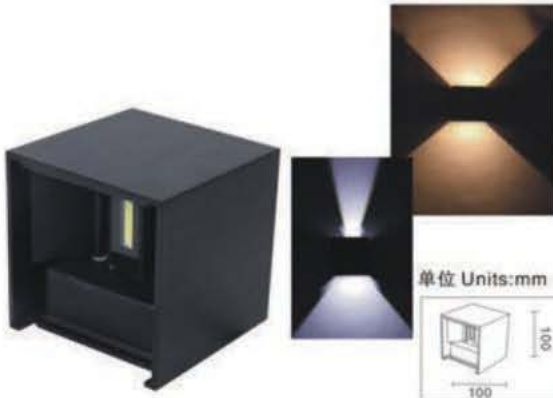

单位 Units:mm



**型号 Item NO: BRL-WL-27-2x3W**

尺寸Size: 100X100XH100mm  
 功率Power: 2x3W  
 输入电压Input: AC85-265V  
 色温Color Temperature: 3000K/4000K/6000K  
 显指C. R. I: 82Ra  
 光束角Beam Angle: 38°  
 材质Material: 铝材Aluminum  
 灯体颜色: 白/黑  
 Color: White/Black



单位 Units:mm



**型号 Item NO: BRL-WL-25-4x3W**

尺寸Size: 110xH100mm  
 功率Power: 4x3W  
 输入电压Input: AC85-265V  
 色温Color Temperature: 2700K/3000K/4000K/6000K  
 显指C. R. I: 80/90Ra  
 光束角Beam Angle: 36°  
 材质Material: 铝材Aluminum  
 灯体颜色: 白/黑  
 Color: White/Black



**阅读壁灯 360° 可调角度**

型号Item No2	<b>BRL-TL-174-B-3W</b>
尺寸Size	Φ33XH350mm
功率Power	12W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80/90Ra
光束角Beam Angle	24°
材质Material	铝材Aluminum

单位 Units:mm




**阅读壁灯 360° 可调角度**

型号Item No2	<b>BRL-TL-174-A-3W</b>
尺寸Size	Φ33XH350mm
功率Power	12W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80/90Ra
光束角Beam Angle	24°
材质Material	铝材Aluminum

单位 Units:mm



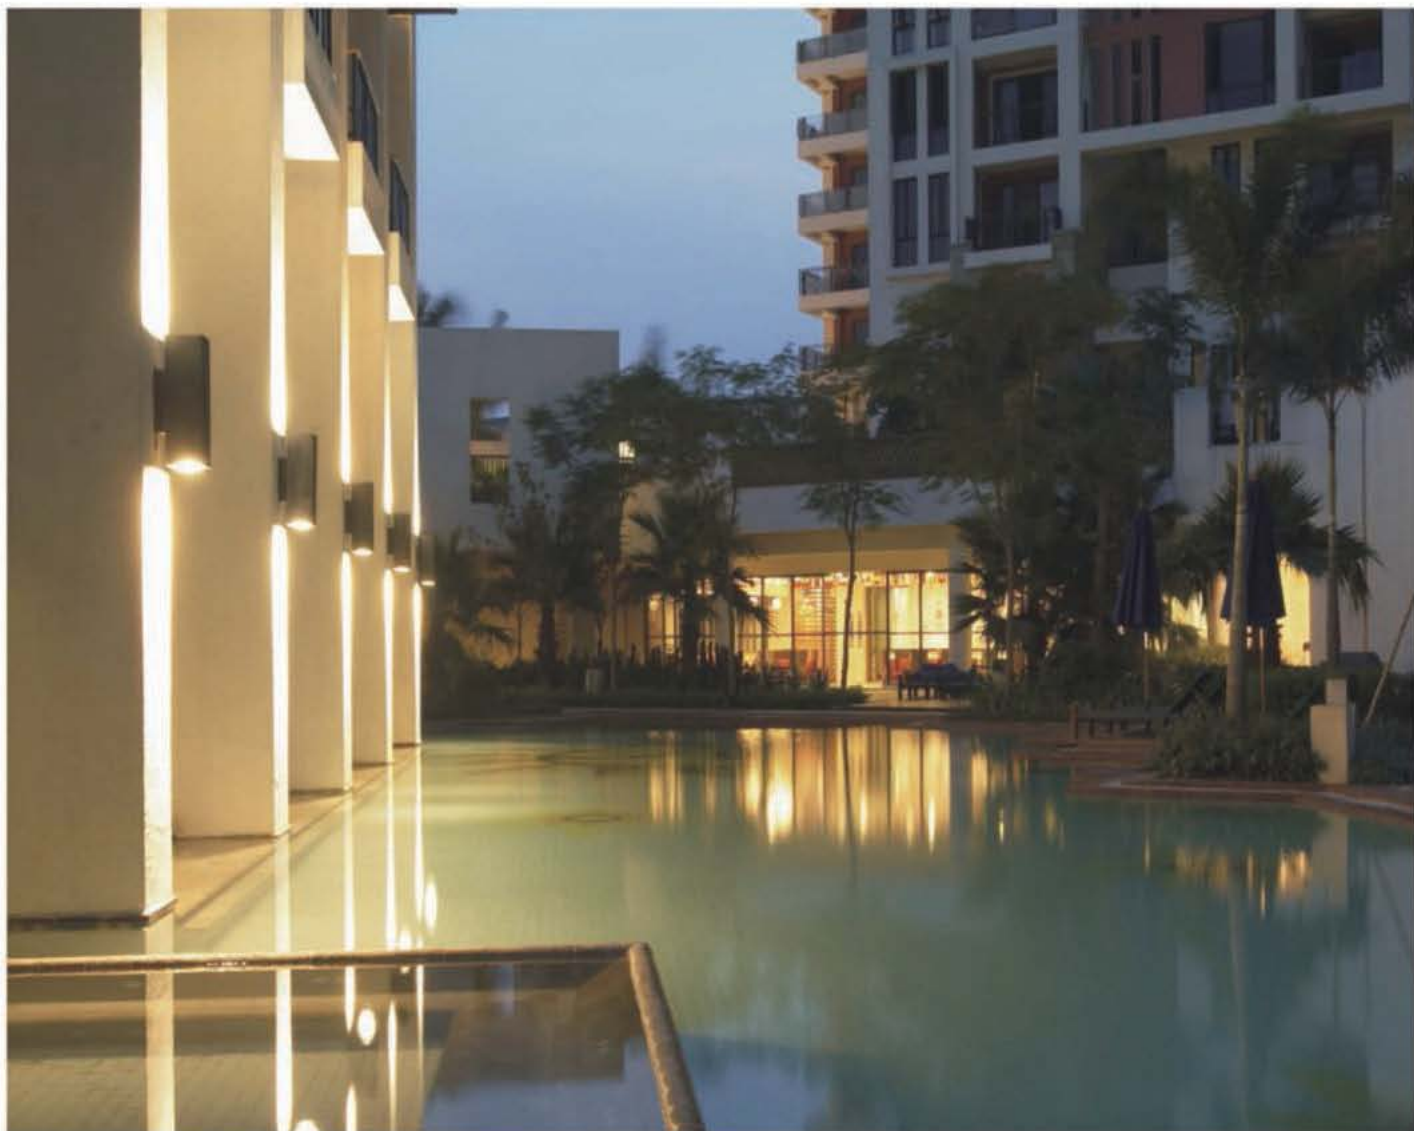

## LED WALL LAMP SERIES

### LED 壁灯系列

#### 产品描述

LED壁灯采用高强度压铸铝或拉伸铝材料，灯体表面采用静电喷涂处理，耐腐蚀，抗老化。

LED壁灯采用钢化玻璃面盖，强度高，耐冲击。

灯具可配置白光或者RGB等，窄光束，宽光束任意搭配。

#### 应用场所

广泛应用于单体建筑、历史建筑群外墙照明、大楼内光外透照明、室内局部照明、绿化景观照明、广告牌照明、酒吧、餐厅等娱乐场所气氛照明。

#### Product Description

1.LED wall lamp adopts high strength die-casting aluminum or tensile aluminum material,the lamp body adopts electrostatic spraying treatment on the surface, corrosion resistance,anti aging.

2.LED wall lamp adopts tempered glass surface cover,high strength,impact resistance.

3.Lamp can be configured to white light or RGB, narrow light beam, width light beam can be arbitrary collocation.

#### Applications

They are widely used in single building,historical buildings exterior lighting,the building inner light outer-penetration lighting,indoor local lighting,landscape lighting,advertising brand lighting,bars,dance halls and other entertainment atmosphere lighting.



LED Wall lamp Series  
LED壁灯系列



型号 Item NO: BRL-XJB-11-2x6W

尺寸Size:  $\Phi 87 \times H 210 \text{mm}$   
 功率Power: 2x6W  
 输入电压Input: 85-265V  
 色温Color Temperature: 2700K/3000K/4000K/6000K  
 显指C.R.I: 82/90Ra  
 光束角Beam Angle: 25°  
 材质Material: 铝材Aluminum  
 防护等级Protection grade: IP65



单位 Units:mm




型号 Item NO: BRL-XJB-8-2x6W

尺寸Size:  $\Phi 87 \times H 210 \text{mm}$   
 功率Power: 2x6W  
 输入电压Input: 85-265V  
 色温Color Temperature: 2700K/3000K/4000K/6000K  
 显指C.R.I: 82/90Ra  
 光束角Beam Angle: 25°  
 材质Material: 铝材Aluminum  
 防护等级Protection grade: IP65



单位 Units:mm

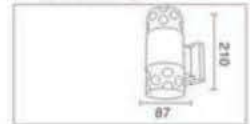

型号 Item NO: BRL-XJB-12-2x6W

尺寸Size:  $\Phi 87 \times H 210 \text{mm}$   
 功率Power: 2x6W  
 输入电压Input: 85-265V  
 色温Color Temperature: 2700K/3000K/4000K/6000K  
 显指C.R.I: 82/90Ra  
 光束角Beam Angle: 25°  
 材质Material: 铝材Aluminum  
 防护等级Protection grade: IP65



单位 Units:mm




型号 Item NO: BRL-XJB-7-2x6W

尺寸Size:  $\Phi 87 \times H 210 \text{mm}$   
 功率Power: 2x6W  
 输入电压Input: 85-265V  
 色温Color Temperature: 2700K/3000K/4000K/6000K  
 显指C.R.I: 82/90Ra  
 光束角Beam Angle: 25°  
 材质Material: 铝材Aluminum  
 防护等级Protection grade: IP65



单位 Units:mm

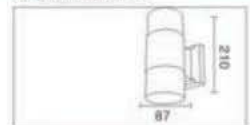




**型号 Item NO: BRL-XJB-10-2x6W**

尺寸Size:  $\Phi 87 \times H 210 \text{mm}$   
 功率Power: 2x6W  
 输入电压Input: 85-265V  
 色温Color Temperature: 2700K/3000K/4000K/6000K  
 显指C.R.I: 82/90Ra  
 光束角Beam Angle: 25°  
 材质Material: 铝材Aluminum  
 防护等级Protection grade: IP65



单位 Units:mm

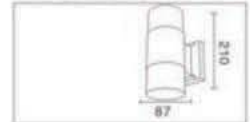


**型号 Item NO: BRL-XJB-9-2x6W**

尺寸Size:  $\Phi 87 \times H 210 \text{mm}$   
 功率Power: 2x6W  
 输入电压Input: 85-265V  
 色温Color Temperature: 2700K/3000K/4000K/6000K  
 显指C.R.I: 82/90Ra  
 光束角Beam Angle: 25°  
 材质Material: 铝材Aluminum  
 防护等级Protection grade: IP65



单位 Units:mm

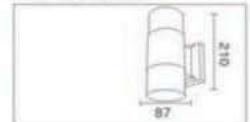


**型号 Item NO: BRL-XJB-13-2x6W**

尺寸Size:  $\Phi 87 \times H 210 \text{mm}$   
 功率Power: 2x6W  
 输入电压Input: 85-265V  
 色温Color Temperature: 2700K/3000K/4000K/6000K  
 显指C.R.I: 82/90Ra  
 光束角Beam Angle: 25°  
 材质Material: 铝材Aluminum  
 防护等级Protection grade: IP65



单位 Units:mm

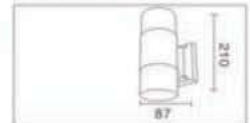


**型号 Item NO: BRL-XJB-14-2x6W**

尺寸Size:  $\Phi 87 \times H 210 \text{mm}$   
 功率Power: 2x6W  
 输入电压Input: 85-265V  
 色温Color Temperature: 2700K/3000K/4000K/6000K  
 显指C.R.I: 82/90Ra  
 光束角Beam Angle: 25°  
 材质Material: 铝材Aluminum  
 防护等级Protection grade: IP65



单位 Units:mm

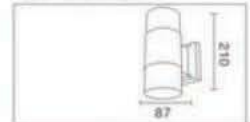

LED Wall lamp Series  
LED壁灯系列




型号 Item NO: BRL-XJB-2-2x6W

尺寸Size:  $\Phi 65 \times H 198 \text{mm}$   
 功率Power: 2x6W  
 输入电压Input: 85-265V  
 色温Color Temperature: 2700K/3000K/4000K/6000K  
 显指C.R.I: 82/90Ra  
 光束角Beam Angle: 25°  
 材质Material: 铝材Aluminum  
 防护等级Protection grade: IP65



单位 Units:mm




型号 Item NO: BRL-XJB-3-2x6W

尺寸Size:  $\Phi 65 \times H 198 \text{mm}$   
 功率Power: 2x6W  
 输入电压Input: 85-265V  
 色温Color Temperature: 2700K/3000K/4000K/6000K  
 显指C.R.I: 82/90Ra  
 光束角Beam Angle: 25°  
 材质Material: 铝材Aluminum  
 防护等级Protection grade: IP65



单位 Units:mm



型号 Item NO: BRL-XJB-5-2x6W

尺寸Size:  $\Phi 65 \times H 198 \text{mm}$   
 功率Power: 2x6W  
 输入电压Input: 85-265V  
 色温Color Temperature: 2700K/3000K/4000K/6000K  
 显指C.R.I: 82/90Ra  
 光束角Beam Angle: 25°  
 材质Material: 铝材Aluminum  
 防护等级Protection grade: IP65



单位 Units:mm



型号 Item NO: BRL-XJB-6-2x6W

尺寸Size:  $\Phi 65 \times H 198 \text{mm}$   
 功率Power: 2x6W  
 输入电压Input: 85-265V  
 色温Color Temperature: 2700K/3000K/4000K/6000K  
 显指C.R.I: 82/90Ra  
 光束角Beam Angle: 25°  
 材质Material: 铝材Aluminum  
 防护等级Protection grade: IP65



单位 Units:mm







型号 Item NO: BRL-XJB-15-2x6W

尺寸Size:  $\Phi 87 \times H 210 \text{mm}$   
功率Power: 2x6W  
输入电压Input: 85-265V  
色温Color Temperature: 2700K/3000K/4000K/6000K  
显指C.R.I: 82/90Ra  
光束角Beam Angle: 25°  
材质Material: 铝材Aluminum  
防护等级Protection grade: IP65



单位 Units:mm




型号 Item NO: BRL-XJB-16-2x6W

尺寸Size:  $\Phi 87 \times H 210 \text{mm}$   
功率Power: 2x6W  
输入电压Input: 85-265V  
色温Color Temperature: 2700K/3000K/4000K/6000K  
显指C.R.I: 82/90Ra  
光束角Beam Angle: 25°  
材质Material: 铝材Aluminum  
防护等级Protection grade: IP65



单位 Units:mm




型号 Item NO: BRL-XJB-16-2x6W

尺寸Size: 90x55xH160mm  
功率Power: 2x5W  
输入电压Input: 85-265V  
色温Color Temperature: 2700K/3000K/4000K/6000K  
显指C.R.I: 82/90Ra  
光束角Beam Angle: 25°  
材质Material: 铝材Aluminum  
防护等级Protection grade: IP65



单位 Units:mm



型号 Item NO: BRL-WL-5-2x5W

尺寸Size: 160x90xH55mm  
功率Power: 2x5W  
输入电压Input: 85-265V  
色温Color Temperature: 2700K/3000K/4000K/6000K  
显指C.R.I: 82/90Ra  
光束角Beam Angle: 25°  
材质Material: 铝材Aluminum  
防护等级Protection grade: IP65



单位 Units:mm



LED Wall lamp Series  
LED壁灯系列



Item No	A	B	Lamp
<b>BRL-HWBD-1X7W</b>	160	Φ65	LED 1X7W
<b>BRL-HWBD-1X12W</b>	160	Φ90	LED 1x12W
<b>BRL-HWBD-1X15W</b>	200	Φ110	LED 1x15W

优质铝制品 Cast aluminum body  
透明玻璃灯罩 Clear glass  
3000K/4000K/6000K 90-260V 50/60Hz




Item No	A	B	Lamp
<b>BRL-HWBD-2X7W</b>	160	Φ65	LED 2X7W
<b>BRL-HWBD-2X12W</b>	260	Φ90	LED 2x12W
<b>BRL-HWBD-2X15W</b>	300	Φ110	LED 2x15W

优质铝制品 Cast aluminum body  
透明玻璃灯罩 Clear glass  
3000K/4000K/6000K 90-260V 50/60Hz




Item No	A	B	C	Lamp
<b>BRL-1334</b>	123	114	Φ92	LED 2X3W
<b>BRL-1335</b>	123	89	Φ92	LED 1x3W

优质铝制品 Cast aluminum body  
透明玻璃灯罩 Clear glass  
3000/6000K 90-260V 50/60Hz



Item No	A	B	C	Lamp
<b>BRL-1336</b>	141	103	Φ88	LED 2X3W
<b>BRL-1337</b>	141	89	Φ88	LED 1x3W


优质铝制品 Cast aluminum body  
透明玻璃灯罩 Clear glass  
3000/6000K 90-260V 50/60Hz






Item No	A	B	C	Lamp
<b>BRL-1321</b>	85	140	74	LED 2X1W
<b>BRL-1322</b>	57	87	47	LED 1x1W

优质铝制品 Cast aluminum body  
透光罩 PMMA  
3000/6000K 90-260V 50/60Hz

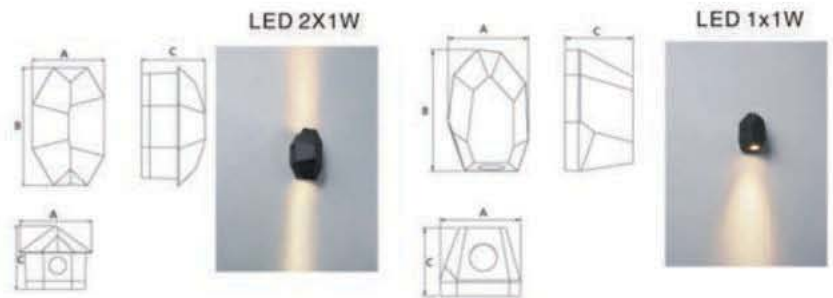


Item No	A	B	C	Lamp
<b>BRL-1323</b>	160	85	160	LED 8X1W
<b>BRL-1324</b>	125	70	125	LED 4x1W

优质铝制品 Cast aluminum body  
透光罩 PMMA  
3000/6000K 90-260V 50/60Hz

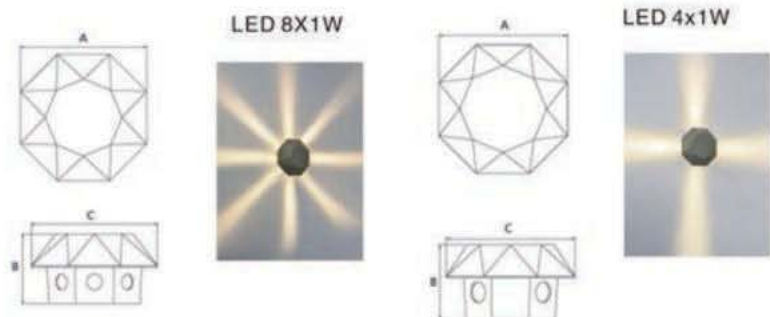



LED Wall lamp Series  
LED壁灯系列

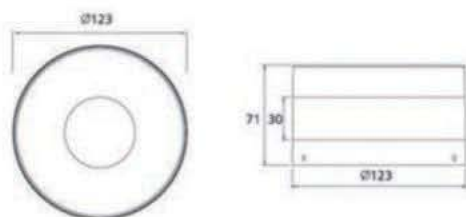

BRL-1305(R)		單色 Single Color		
● Red	LED	4x1W	90-260V	50/60Hz

BRL-1305(G)		單色 Single Color		
● Green	LED	4x1W	90-260V	50/60Hz

BRL-1305(B)		單色 Single Color		
● Blue	LED	4x1W	90-260V	50/60Hz

BRL-1305(Y)		單色 Single Color		
● Yellow	LED	4x1W	90-260V	50/60Hz

BRL-1305(WW)		單色 Single Color		
● Warm White	LED	4x1W	90-260V	50/60Hz

BRL-1305(W)		單色 Single Color		
○ White	LED	4x1W	90-260V	50/60Hz



PRODUCTS CHARACTERS:

Body: Made of high quality die-cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser: PMMA.

Reflector: Made of anodized high pure aluminum.

Gasketing: Made of thermostable silica gel to improve protection class.

Fsastener: Made of stainless steel with high intensity and corrosion protection.


Application: Wall of buildings, villas, parks, gardens, hotels and so on.

TECHNICAL DATA:

Insulation Class: Class I


Standard: IEC60598/GB7000

Finish: Matt black as standard. Matt red, Matt coffee, Matt grey, Dark grey, Dark bronze any other RAL color is available upon request.

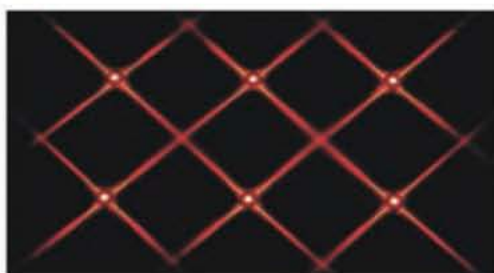








## LED Wall lamp Series LED壁灯系列

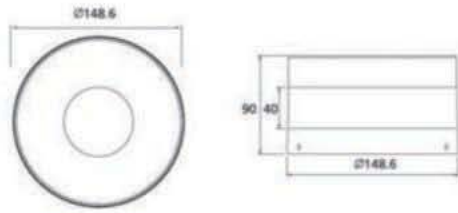


<b>BRL-1310</b>			RGB跳變 RGB(Flash)	
RGB	LED	5W	175-250V	50/60Hz

<b>BRL-1311</b>			RGB漸變 RGB(Fade)	
RGB	LED	5W	175-250V	50/60Hz

<b>BRL-1312</b>			RGB程序變化 RGB(Pre-programmed)	
RGB	LED	13W	90-260V	50/60Hz

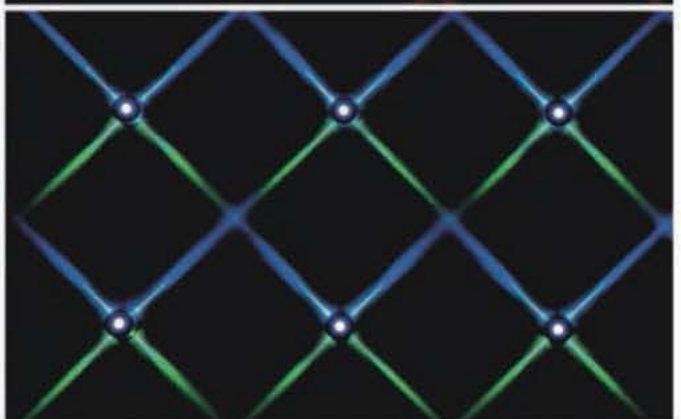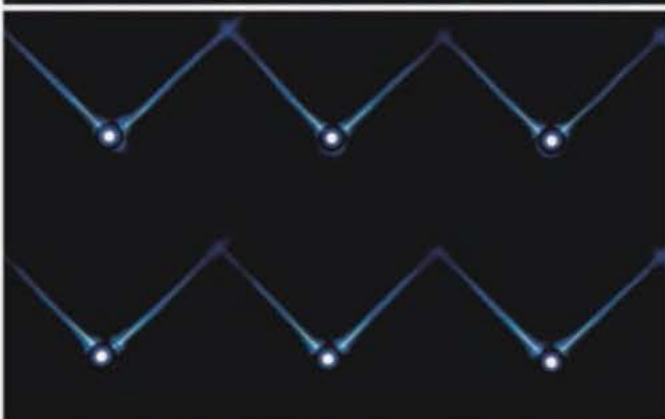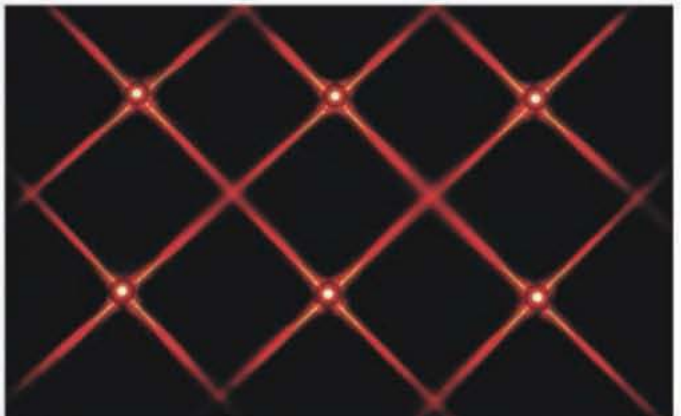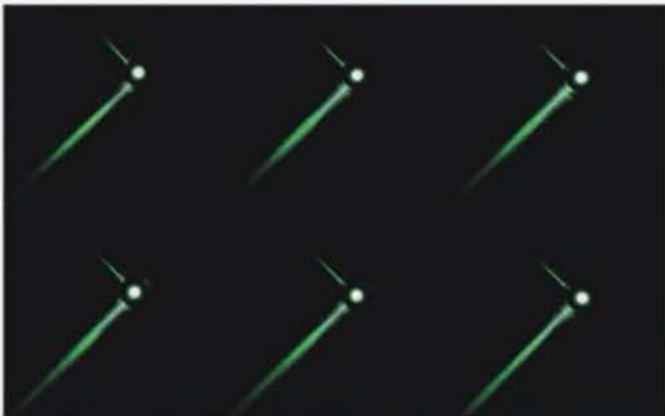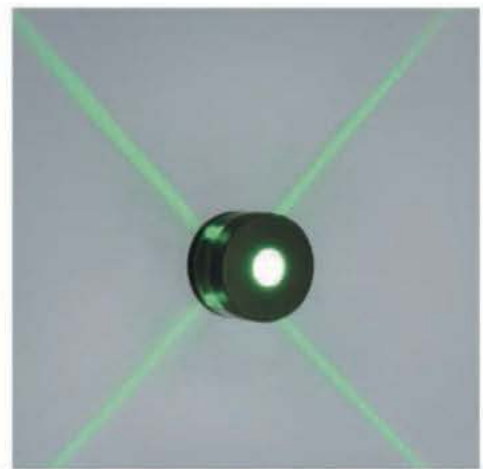






LED Wall lamp Series  
LED壁灯系列

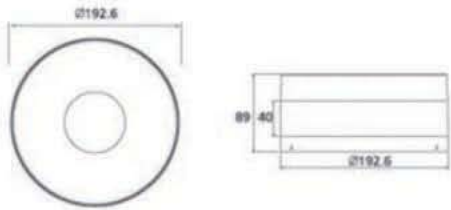

<b>BRL-1318</b>		RGB跳變 RGB(Flash)		
RGB	LED	9W	175-250V	50/60Hz

<b>BRL-1319</b>		RGB漸變 RGB(Fade)		
RGB	LED	9W	175-250V	50/60Hz

<b>BRL-1320</b>		RGB程序變化 RGB(Pre-programmed)		
RGB	LED	25W	90-260V	50/60Hz

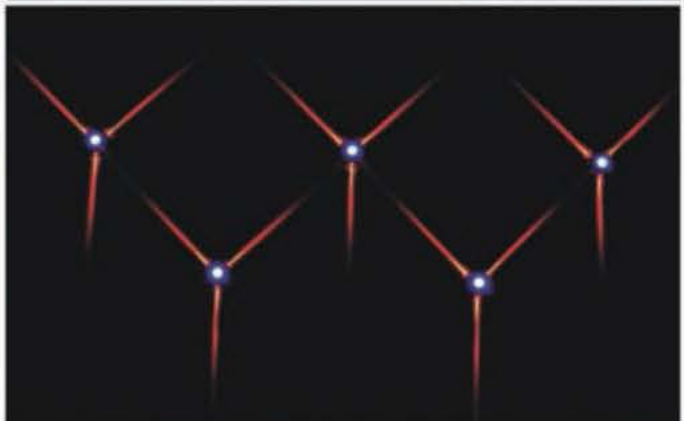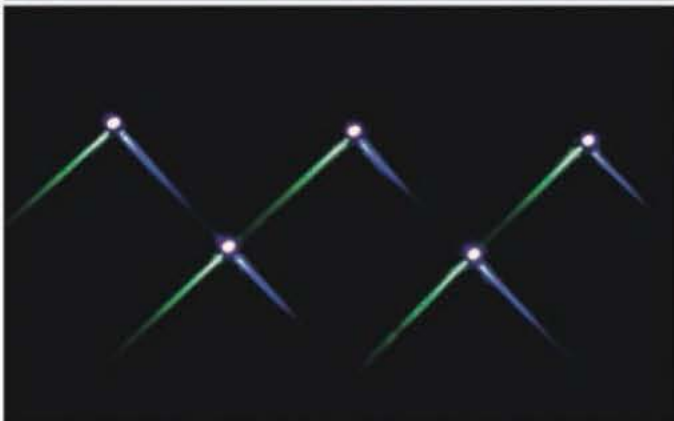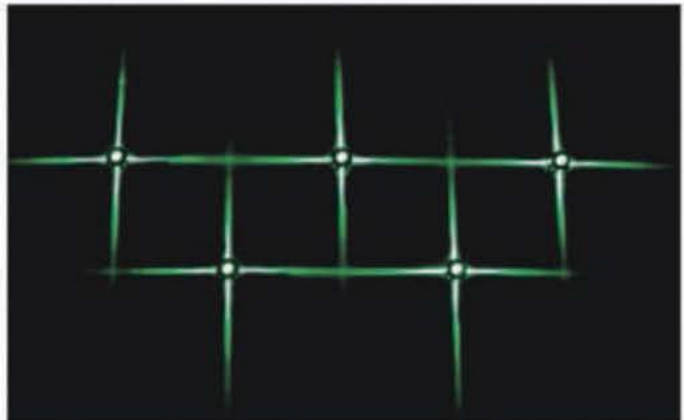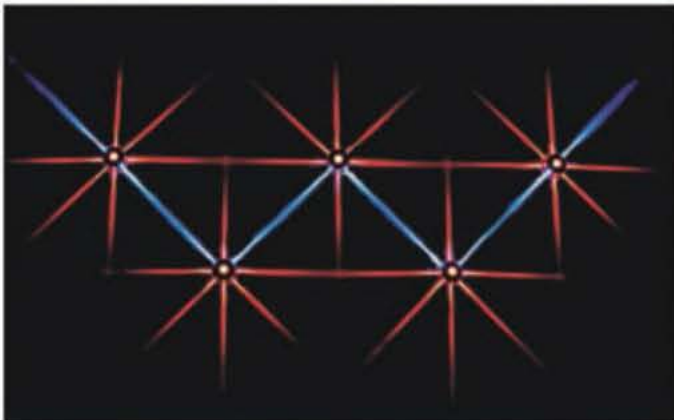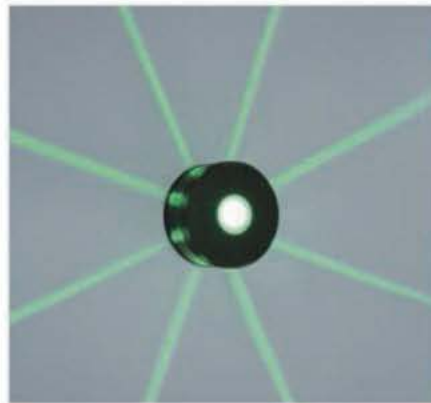






**型号 Item NO: BRL-QJ-5-1.5W**

材质 Material: PC  
功率 Power: 1.5W  
电压 Voltage: AC85V-265V  
色温 CCT: 3000K/6000K  
显色指数 C.R.I.:  $\geq 75$   
光束角 Beam angle:  $90^\circ$   
颜色: 象牙白/太空银/香槟金/黑色  
Color: White/Silver/Champagne gold/Black  
尺寸 Size: 96x96x35mm  
开孔 Cutting: 86x86mm



单位 Units:mm




**型号 Item NO: BRL-QJ-6-1W**

材质 Material: PC+铝片  
功率 Power: 1W  
电压 Voltage: AC85V-265V  
色温 CCT: 3000K/6000K  
显色指数 C.R.I.:  $\geq 75$   
光束角 Beam angle:  $90^\circ$   
颜色: 象牙白/太空银/香槟金/黑色  
Color: White/Silver/Champagne gold/Black  
尺寸 Size: 96x96x35mm  
开孔 Cutting: 86x86mm



单位 Units:mm




**型号 Item NO: BRL-QJ-4-1W**

材质 Material: PC  
功率 Power: 1W  
电压 Voltage: AC85V-265V  
色温 CCT: 3000K/6000K  
显色指数 C.R.I.:  $\geq 75$   
光束角 Beam angle:  $90^\circ$   
颜色: 象牙白/太空银/香槟金/黑色  
Color: White/Silver/Champagne gold/Black  
尺寸 Size: 86x86x35mm  
开孔 Cutting: 73x73mm



单位 Units:mm



**型号 Item NO: BRL-QJ-7-1.5W**

材质 Material: PC+铝片+金属框  
功率 Power: 1.5W  
电压 Voltage: AC85V-265V  
色温 CCT: 3000K/6000K  
显色指数 C.R.I.:  $\geq 75$   
光束角 Beam angle:  $90^\circ$   
颜色: 象牙白/太空银/香槟金/黑色  
Color: White/Silver/Champagne gold/Black  
尺寸 Size: 86x86x35mm  
开孔 Cutting: 73x73mm



单位 Units:mm



LED Indoor Step Light Series  
LED室内墙角灯系列




型号 Item NO: BRL-QJ-1-1W

材质 Material: PC  
功率 Power: 1W  
电压 Voltage: AC180V-265V  
色温 CCT: 3000K/6000K  
显色指数 C.R.I:  $\geq 75$   
光束角 Beam angle: 120°  
颜色 Color: 象牙白/太空银/香槟金/黑色  
亮灯时间 Working time: 120秒 120S  
感应距离 Sensor distance: 1-3m  
尺寸 Size: 94x94x30mm  
开孔 Cutting: 86x86mm



单位 Units:mm




型号 Item NO: BRL-QJ-3-1.5W

材质 Material: PC  
功率 Power: 1.5W  
电压 Voltage: AC85V-265V  
色温 CCT: 3000K/6000K  
显色指数 C.R.I:  $\geq 75$   
光束角 Beam angle: 120°  
颜色 Color: 象牙白/太空银/香槟金/黑色  
亮灯时间 Working time: 120秒 120S  
感应距离 Sensor distance: 1-3m  
尺寸 Size: 94x94x30mm  
开孔 Cutting: 86x86mm



单位 Units:mm




型号 Item NO: BRL-QJ-32-1.5W

材质 Material: PC  
功率 Power: 1.5W  
电压 Voltage: AC85V-265V  
色温 CCT: 3000K/6000K  
显色指数 C.R.I:  $\geq 75$   
光束角 Beam angle: 90°  
颜色: 象牙白/太空银/香槟金/黑色  
Color: White/Silver/Champagne gold/Black  
尺寸 Size: 86x86x30mm  
开孔 Cutting: 73x73mm




单位 Units:mm






**型号 Item NO: BRL-QJ-9-2W**

材质 Material: 铝材 (aluminum)  
功率 Power: 2W  
电压 Voltage: AC85V-265V  
色温 CCT: 3000K/6000K  
显色指数 C.R.I: 80/90Ra  
光束角 Beam angle: 90°  
颜色: 银灰色/白/黑色  
Color: Silver Grey/White/Black  
尺寸 Size: 85x85x45mm  
开孔 Cutting: 70x70mm

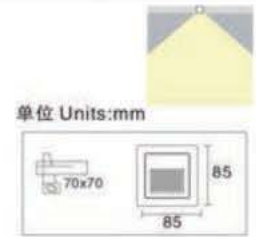


**型号 Item NO: BRL-QJ-11-2W**

材质 Material: 铁 (Iron)  
功率 Power: 3W  
电压 Voltage: AC85V-265V  
色温 CCT: 3000K/6000K  
显色指数 C.R.I: 80/90Ra  
光束角 Beam angle: 90°  
尺寸 Size: 90x90x35mm  
开孔 Cutting: 80x80mm

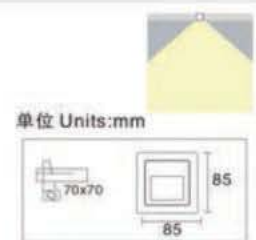

**型号 Item NO: BRL-QJ-17-3W**

材质 Material: 铝材 (aluminum)  
功率 Power: 3W  
电压 Voltage: AC85V-265V  
色温 CCT: 3000K/6000K  
显色指数 C.R.I: 80/90Ra  
光束角 Beam angle: 90°  
尺寸 Size: 70x70x40mm  
开孔 Cutting: 60x60mm

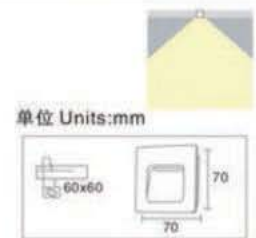

**型号 Item NO: BRL-QJ-12-3W**

材质 Material: 铝材 (aluminum)  
功率 Power: 3W  
电压 Voltage: AC85V-265V  
色温 CCT: 3000K/6000K  
显色指数 C.R.I: 80/90Ra  
光束角 Beam angle: 90°  
尺寸 Size:  $\Phi 75 \times 25$ mm  
开孔 Cutting:  $\Phi 62$ mm



**型号 Item NO: BRL-QJ-13-3W**

材质 Material: 铝材 (aluminum)  
功率 Power: 3W  
电压 Voltage: AC85V-265V  
色温 CCT: 3000K/6000K  
显色指数 C.R.I: 80/90Ra  
光束角 Beam angle: 90°  
尺寸 Size:  $\Phi 80 \times 35$ mm  
开孔 Cutting:  $\Phi 63$ mm









**型号 Item NO: BRL-QJ-14-2W**

材质 Material: 铝材 (aluminum)  
功率 Power: 2W  
电压 Voltage: AC85V-265V  
色温 CCT: 3000K/6000K  
显色指数 C.R.I.: 80/90Ra  
光束角 Beam angle: 90°  
尺寸 Size: 75x75x25mm  
开孔 Cutting: 50x50mm

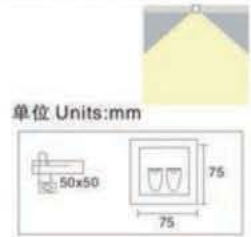


**型号 Item NO: BRL-QJ-20-2W**

材质 Material: 铝材 (aluminum)  
功率 Power: 2W  
电压 Voltage: AC85V-265V  
色温 CCT: 3000K/6000K  
显色指数 C.R.I.: 80/90Ra  
光束角 Beam angle: 90°  
尺寸 Size:  $\Phi 75 \times 25$ mm  
开孔 Cutting:  $\Phi 50$ mm

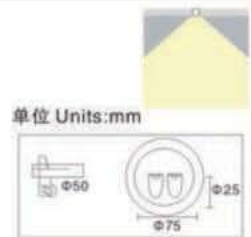


**型号 Item NO: BRL-QJ-15-1W**

材质 Material: 铝材 (aluminum)  
功率 Power: 1W  
电压 Voltage: AC85V-265V  
色温 CCT: 3000K/6000K  
显色指数 C.R.I.: 80/90Ra  
光束角 Beam angle: 90°  
尺寸 Size: 86x86x50mm  
开孔 Cutting: 60x60mm

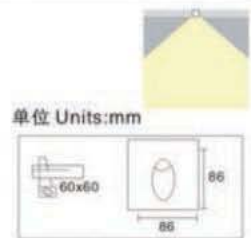

**型号 Item NO: BRL-QJ-16-1W**

材质 Material: 铝材 (aluminum)  
功率 Power: 1W  
电压 Voltage: AC85V-265V  
色温 CCT: 3000K/6000K  
显色指数 C.R.I.: 80/90Ra  
光束角 Beam angle: 90°  
尺寸 Size: 80x40mm  
开孔 Cutting: 60mm

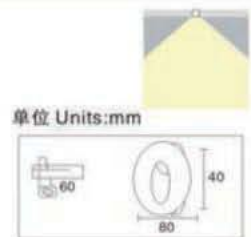

**型号 Item NO: BRL-QJ-19-3W**


材质 Material: 铝材 (aluminum)  
功率 Power: 3W  
电压 Voltage: AC85V-265V  
色温 CCT: 3000K/6000K  
显色指数 C.R.I.: 80/90Ra  
光束角 Beam angle: 90°  
尺寸 Size: 55x55x30mm  
开孔 Cutting: 45x45mm





**型号 Item NO: BRL-DJ-18-3W**

材质 Material: 铝材 ( aluminum )  
 功率 Power: 3W  
 电压 Voltage: AC85V-265V  
 色温 CCT: 3000K/6000K  
 显色指数 C.R.I: 80/90Ra  
 光束角 Beam angle: 90°  
 尺寸 Size:  $\Phi 55 \times H30 \text{mm}$   
 开孔 Cutting:  $\Phi 45 \text{mm}$

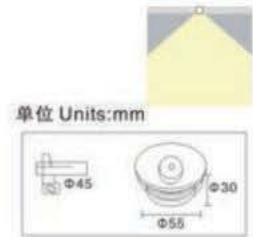

**型号 Item NO: BRL-DJ-24-2W**

材质 Material: 铝材 ( aluminum )  
 功率 Power: 2W  
 电压 Voltage: AC85V-265V  
 色温 CCT: 3000K/6000K  
 显色指数 C.R.I: 80/90Ra  
 光束角 Beam angle: 90°  
 尺寸 Size:  $\Phi 75 \times H30 \text{mm}$   
 开孔 Cutting:  $\Phi 63 \text{mm}$



**型号 Item NO: BRL-DJ-25-1W**

材质 Material: 铝材 ( aluminum )  
 功率 Power: 1W  
 电压 Voltage: AC85V-265V  
 色温 CCT: 3000K/6000K  
 显色指数 C.R.I: 80/90Ra  
 光束角 Beam angle: 90°  
 尺寸 Size:  $\Phi 50 \times H50 \text{mm}$   
 开孔 Cutting:  $\Phi 42 \text{mm}$



**型号 Item NO: BRL-DJ-26-3W**

材质 Material: 铝材 ( aluminum )  
 功率 Power: 3W  
 电压 Voltage: AC85V-265V  
 色温 CCT: 3000K/6000K  
 显色指数 C.R.I: 80/90Ra  
 光束角 Beam angle: 90°  
 尺寸 Size:  $\Phi 58 \times H35 \text{mm}$   
 开孔 Cutting:  $\Phi 53 \text{mm}$



**型号 Item NO: BRL-DJ-27-3W**

材质 Material: 铝材 ( aluminum )  
 功率 Power: 3W  
 电压 Voltage: AC85V-265V  
 色温 CCT: 3000K/6000K  
 显色指数 C.R.I: 80/90Ra  
 光束角 Beam angle: 90°  
 尺寸 Size:  $\Phi 58 \times H35 \text{mm}$   
 开孔 Cutting:  $\Phi 53 \text{mm}$



LED Indoor Step Light Series  
LED室内墙角灯系列




型号 Item NO: BRL-DJ-28-3W

材质 Material: 铝材 (aluminum)  
功率 Power: 3W  
电压 Voltage: AC85V-265V  
色温 CCT: 3000K/6000K  
显色指数 C.R.I.: 80/90Ra  
光束角 Beam angle: 90°  
尺寸 Size:  $\Phi 58 \times H35$ mm  
开孔 Cutting:  $\Phi 53$ mm




型号 Item NO: BRL-DJ-29-1W

材质 Material: 铝材 (aluminum)  
功率 Power: 1W  
电压 Voltage: AC85V-265V  
色温 CCT: 3000K/6000K  
显色指数 C.R.I.: 80/90Ra  
光束角 Beam angle: 90°  
尺寸 Size:  $\Phi 55 \times H35$ mm  
开孔 Cutting:  $\Phi 49$ mm




型号 Item NO: BRL-DJ-30-1W

材质 Material: 铝材 (aluminum)  
功率 Power: 3W  
电压 Voltage: AC85V-265V  
色温 CCT: 3000K/6000K  
显色指数 C.R.I.: 80/90Ra  
光束角 Beam angle: 90°  
尺寸 Size:  $\Phi 60 \times H35$ mm  
开孔 Cutting:  $\Phi 57$ mm



型号 Item NO: BRL-DJ-31-1W

材质 Material: 铝材 (aluminum)  
功率 Power: 3W  
电压 Voltage: AC85V-265V  
色温 CCT: 3000K/6000K  
显色指数 C.R.I.: 80/90Ra  
光束角 Beam angle: 90°  
尺寸 Size: 45x45xH30mm  
开孔 Cutting: 43x43mm





LED T5、T8 Series  
LED T管系列



T8分体 LED日光管  
T8 Tube (only tube)



T8一体 LED支架  
T8 Complete set  
(with base)



T5一体 LED日光管  
T5 Complete set  
(with base)



产品描述

小巧精致：氧化工艺处理，简介大方，安装方便。  
安全可靠：灯罩采用高级阻燃工程塑料，耐高温，防腐蚀。  
性能稳定：内置高性能横流电源，无噪音，无频闪，光色一致性强。  
高效节能：发光效率比传统灯具更高，比普通T5/T8灯管节能22%以上。  
色彩多样：有暖白、白色、红色、蓝色、黄色可供选择。

Product Features

1. Good safety: the lampcover adopts the senior flame-retardant engineering materials, high temperature resistance, corrosion resistance.
2. Stable performance: built-in the high performance of cross-flow power, no noise, no troscopic, color consistency and strong.
3. Efficient energy saving: higher luminous efficiency than traditional lamps, than ordinary LED saving 20% power, saving more than 60% than tube T5/T8 daylight.
4. Applies to shopping malls, factories, schools, hospitals, office and so on.

型号 Model	电压 Voltage	功率 Power	光源类型 LED	色温 (K) Color Temperature	材质 Material	尺寸 Size	系列名 Type
BRL-T8-0.6-48S	AC165-265V	10W	LED 2835 24LM 900Lm	3000/6500K	铝材AL+PC	600x30mm	T8分体 LED日光管 T8 Tube (only tube)
BRL-T8-0.9-72S	AC165-265V	15W	LED 2835 24LM 1400Lm	3000/6500K	铝材AL+PC	900x30mm	
BRL-T8-1.2-96S	AC165-265V	18W	LED 2835 24LM 1800Lm	3000/6500K	铝材AL+PC	1200x30mm	
BRL-T8-0.6-48S	AC165-265V	10W	LED 2835 24LM 900Lm	3000/6500K	铝材AL+PC	600x33mm	T8一体 LED支架 T8 Complete set(with base)
BRL-T8-0.9-72S	AC165-265V	15W	LED 2835 24LM 1400Lm	3000/6500K	铝材AL+PC	900x33mm	
BRL-T8-1.2-96S	AC165-265V	18W	LED 2835 24LM 1800Lm	3000/6500K	铝材AL+PC	1200x33mm	
BRL-T5-0.3	AC165-265V	3W	LED 3014 12LM 300Lm	3000/6500K	铝材AL+PC	300x35mm	T5一体 LED日光管 T5 Complete set(with base)
BRL-T5-0.6	AC165-265V	7W	LED 3014 12LM 600Lm	3000/6500K	铝材AL+PC	600x35mm	
BRL-T5-0.9	AC165-265V	10W	LED 3014 12LM 900Lm	3000/6500K	铝材AL+PC	900x35mm	
BRL-T5-1.0	AC165-265V	12W	LED3014 12LM 1000Lm	3000/6500K	铝材AL+PC	1000x35mm	
BRL-T5-1.2	AC165-265V	14W	LED3014 12LM 1150Lm	3000/6500K	铝材AL+PC	1200x35mm	



# 5050 贴片软光条 60 灯 / 米系列


SMD 60LEDs/M Flexible Strip Light Series

### 产品描述

- ◇ 产品采用 5050 贴片灯珠, 可做各种颜色。
- ◇ 低压供电 DC12V, 安全可靠。
- ◇ 柔性线路板, 可随意弯曲。
- ◇ 3 灯一组方便剪接。


### Product Features

- 1.LED Type: 5050SMD, Use the controller to change the color.
- 2.Low Voltage DC12V, Safe and reliable.
- 3.Flexible SMD LED Strip with FPC, Bending angle 180°
- 4.3 leds per unit, cuttable every unit.
- 5.Can do many kinds of waterproof processing.

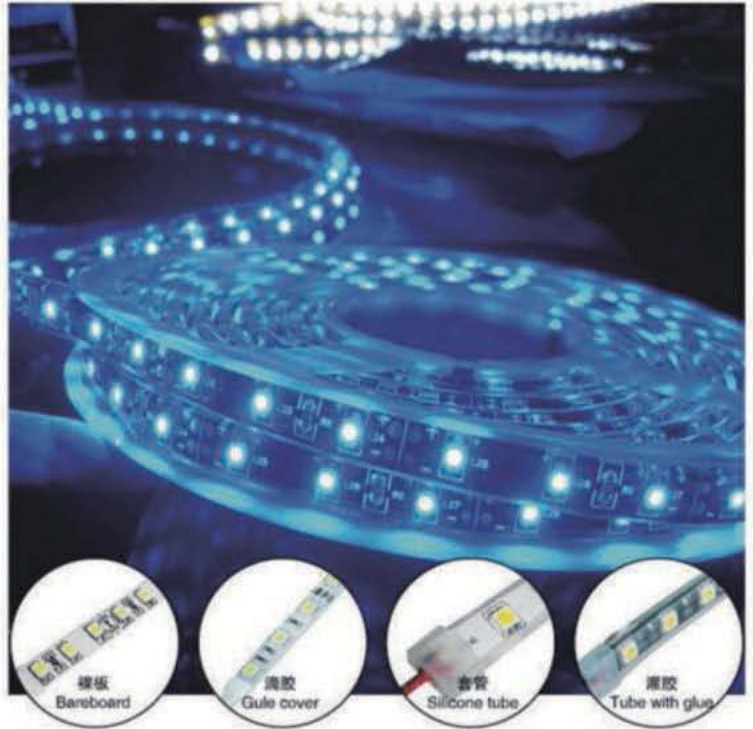

### 结构尺寸图

#### Structure size chart

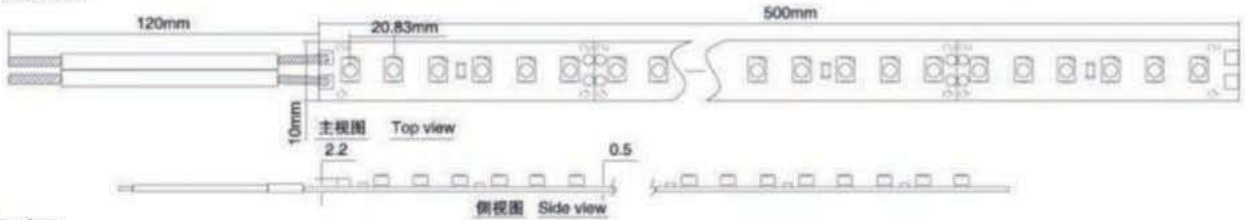

### 连接图

#### Connect Drawing



型号 Model	颜色 Color	工作电压 Working Voltage	尺寸 Size(mm)	LED 数量 / 米 LED QTY/M	功率 Power(W)	发光角度 Shine Angle	工作电流 Current(A)	包 装 Packing
BRL-SMD5050-60R	红 ●	DC12V	5000 × 10	60pcs	1.23W/ 米	120°	1.1A	5m/reel
BRL-SMD5050-60R	黄 ●	DC12V	5000 × 10	60pcs	1.23W/ 米	120°	1.1A	5m/reel
BRL-SMD5050-60R	蓝 ●	DC12V	5000 × 10	60pcs	1.23W/ 米	120°	1.1A	5m/reel
BRL-SMD5050-60R	绿 ●	DC12V	5000 × 10	60pcs	1.23W/ 米	120°	1.1A	5m/reel
BRL-SMD5050-60R	白 ○	DC12V	5000 × 10	60pcs	1.23W/ 米	120°	1.1A	5m/reel
BRL-SMD5050-60R	暖白 ○	DC12V	5000 × 10	60pcs	1.23W/ 米	120°	1.1A	5m/reel



## 5050 贴片软光条 60 灯 / 米系列

SMD 60LEDs/M Flexible Strip Light Series

### 产品描述

- ◇超长负载长度：220V 一米一剪，常规 100 米一卷，可连接 100 米使用。
- ◇防水性能好，可以户外使用，防水等级 IP65。
- ◇安装简单易行成本低，可用玻璃胶可者用固定夹固定。


### 适用场所

产品广泛应用于建筑物轮廓灯、广告装饰、珠宝展柜照明、橱柜照明、衣柜照明、专卖店装饰照明、酒店、宾馆、家居别墅装饰照明等。



### 结构尺寸图

Structure size chart

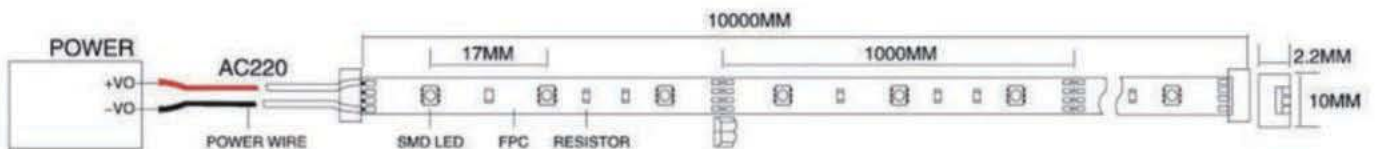

型号 Model	颜色 Color	工作电压 Working Voltage	尺寸 Size(mm)	LED 数量 / 米 LED QTY/M	功率 Power(W)	发光角度 Shine Angle	工作电流 Current(A)	包装 Packing
BRL-3528-60	各种单色	DC12V	5000 × 10	60pcs	4.8W/米	120°	1.1A	100m/reel
BRL-3528-60	RGB 跑马	DC12V	5000 × 10	60pcs	4.8W/米	120°	1.1A	50m/reel
BRL-5050-60 单晶	单晶单色	DC12V	5000 × 10	60pcs	4.8W/米	120°	1.1A	100m/reel
BRL-5050-60 单晶	三晶单色	DC12V	5000 × 10	60pcs	14.4W/米	120°	1.1A	100m/reel
BRL-5050-60	RGB	DC12V	5000 × 10	60pcs	14.4W/米	120°	1.1A	50m/reel
BRL-5050-60	流水、段跳	DC12V	5000 × 10	60pcs	14.4W/米	120°	1.1A	50m/reel





## 5050 贴片软光条 RGB 系列

SMD RGB Flexible Strip Light Series

### 产品描述

- ◇ 产品采用 5050 贴片灯珠，可做各种颜色。
- ◇ 低压供电 DC12V，安全可靠。
- ◇ 柔性线路板，可随意弯曲。
- ◇ 3 灯一组方便剪接。


### Product Features

- 1.LED Type: 5050SMD,Use the controller to change the color.
- 2.Low Voltage DC12V, Safe and reliable.
- 3.Flexible SMD LED Strip with FPC, Bending angle 180°
- 4.3 leds per unit, cuttable every unit.
- 5.Can do many kinds of waterproof processing.



### 结构尺寸图

#### Structure size chart

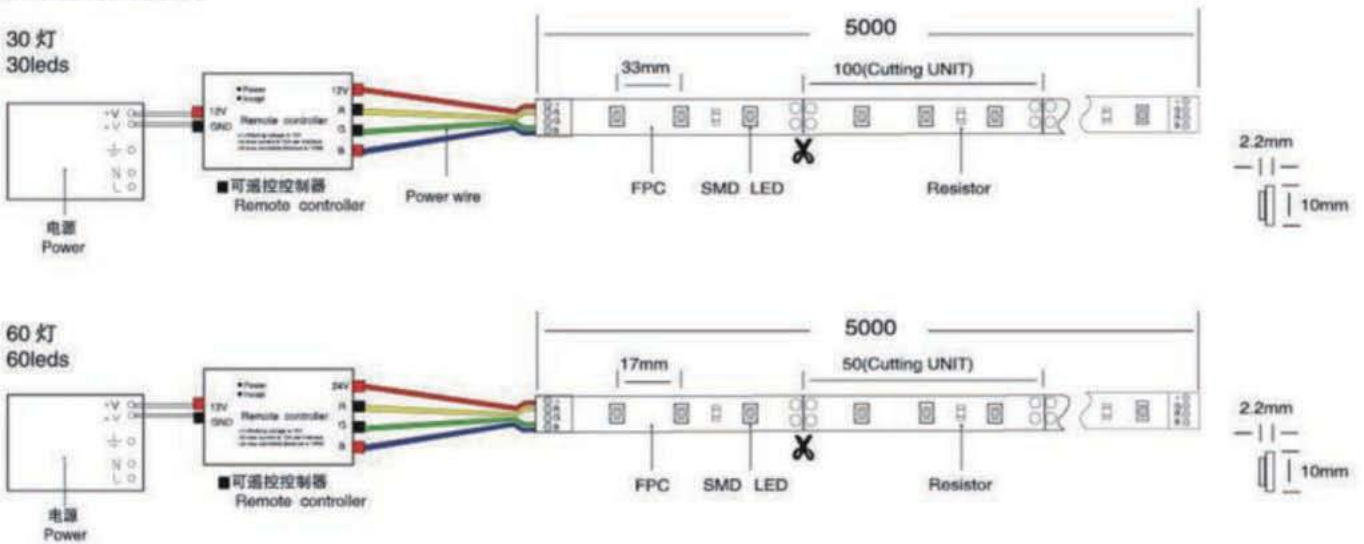

型号 Model	颜色 Color	工作电压 Working Voltage	尺寸 Size(mm)	LED 数量 / 米 LED QTY/M	功率 Power(W)	发光角度 Shine Angle	工作电流 Current(A)	包装 Packing
BRL-SMD5050-30R	RGB	DC12V	1000 × 10	30pcs	1.2W/ 米	120°	0.6A	5m/reel
BRL-SMD5050-60R	RGB	DC12V	1000 × 10	60pcs	1.2W/ 米	120°	0.6A	5m/reel




## LED BULB Series LED球泡/蜡烛泡系列



型号Item NO	BRL-JQP-3W	BRL-JQP-6W	BRL-JQP-9W	BRL-JQP-12W	BRL-JQP-15W
尺寸Size	Φ50XH90mm	Φ60XH102mm	Φ70XH118mm	Φ80XH134mm	Φ90XH150mm
功率Power	3W	6W	9W	12W	15W
流明Lumen	700LM	800LM	1100LM	1400LM	1600LM
LED	5630 12 LED	5630 14 LED	5630 19 LED	5630 24 LED	5630 28 LED
色温Color Temperature	3000K/6000K				
电压Voltage	160-280V				
材质Material	PC				

单位 Units:mm

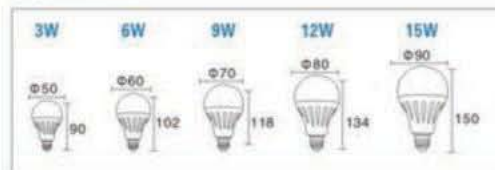

型号Item NO	BRL-GQP-3W	BRL-GQP-6W	BRL-GQP-9W	BRL-GQP-12W	BRL-GQP-15W
尺寸Size	Φ50XH88mm	Φ60XH109mm	Φ70XH121mm	Φ80XH151mm	Φ92XH165mm
功率Power	3W	6W	9W	12W	15W
流明Lumen	600LM	900LM	1600LM	1800LM	2000LM
LED	5630 10 LED	5630 16 LED	5630 28 LED	5630 30 LED	5630 32 LED
色温Color Temperature	3000K/6000K				
电压Voltage	160-280V				
材质Material	铝壳散热+吹塑球罩 Aluminum+PC				

单位 Units:mm




LED BULB Series  
LEDJ(k)§ /it )§ JI]



Item No	BRL-ZSPO-SW	BRL-ZSPO-SW
R, f' Size	CU5XH65mm	
.V, 8. Power	SW E14/E27	
11!.iV Voltage	185-265V	
el Colorer. l)erallt	2700K 6000K	
AJICR, I	80	
LEU Lumens	901mW	
- - A r	0	
fritMaCoS	alt & G o/ldh r o m e	
• (Umsm		



Item No	BRL-ZSPJ-SW	BRL-ZSPJ-SW
R, f' Size	C>35XH82mm	C>35XH105mm
.V, 8. Power	SW E14/E27	9W E14fE27
111.Ji Voltage	18S-26SV	
! I Coi<Te	3000K	
JIIIiCRI	80	
IIIIII Lumens	901mW	
Mil Angle	* 320	
l: fif; .! Color	fMII! Gold /Chrom e	
• ttt Units :mm		



Item No	BRL-FCPO-SW	BRL-FCPO-SW
R, t Size	C>45XH65mm	
vi•Power	SW E14/E27	
tl!.iV Voltage	185-265V	
H CQr l)erall l	2700K 6000K	
lie .A.I	80	
l)P)I lumens	901mW	
,U.L. Angle	320°	
l: TffH! Color	*fMII! a GoldChrome	
単位 Units: mm		



Item No	BRL-FCPJ-SW	BRL-FCPL-SW
R, f' Size	C>35XH82mm	G>35XH105mm
U)Power	SW E14fE27	9W E14fE27
111.Hi Voltage	18S-26SV	
!ICOI«Tt atutt	3000K	
JIII.C.A.I	80	
i)EIII lumens	901mW	
1t1fIII Angle	* 320"	
nit: 1. iit! Color	ettU Gold/Chrome	
.It Units :mm		







LED Flood Light Series  
LED户外投光灯系列



**型号 Item NO: BRL-TGD-10-20W-90°**

尺寸Size: 188X147XH120mm  
 功率Power: 20W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 90°  
 材质Material: 压铸铝 Die-casting Aluminum  
 防护等级: IP65



单位 Units:mm



**型号 Item NO: BRL-TGD-10-30W-90°**

尺寸Size: 230X192XH150mm  
 功率Power: 30W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 90°  
 材质Material: 压铸铝 Die-casting Aluminum  
 防护等级: IP65



单位 Units:mm



**型号 Item NO: BRL-TGD-10-50W-90°**

尺寸Size: 280X147XH120mm  
 功率Power: 50W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 90°  
 材质Material: 压铸铝 Die-casting Aluminum  
 防护等级: IP65



单位 Units:mm



**型号 Item NO: BRL-TGD-10-100W-90°**

尺寸Size: 285X260XH155mm  
 功率Power: 100W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 90°  
 材质Material: 压铸铝 Die-casting Aluminum  
 防护等级: IP65



单位 Units:mm





**型号 Item NO: BRL-TGD-10-150W-90°**

尺寸Size: 390X285XH130mm  
功率Power: 150W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle: 90°  
材质Material: 压铸铝 Die-casting Aluminum  
防护等级: IP65



单位 Units:mm



**型号 Item NO: BRL-TGD-10-200W-90°**

尺寸Size: 390X350XH170mm  
功率Power: 200W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle: 90°  
材质Material: 压铸铝 Die-casting Aluminum  
防护等级: IP65



单位 Units:mm



**型号 Item NO: BRL-TGD-10-50W-9°**

尺寸Size: 280X147XH120mm  
功率Power: 50W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle: 9°  
材质Material: 压铸铝 Die-casting Aluminum  
防护等级: IP65



单位 Units:mm



**型号 Item NO: BRL-TGD-10-100W-9°**

尺寸Size: 390X285XH130mm  
功率Power: 100W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle: 9°  
材质Material: 压铸铝 Die-casting Aluminum  
防护等级: IP65



单位 Units:mm







**型号 Item NO: BRL-TGD-10-50W-15°**

尺寸Size: 280X147XH120mm  
 功率Power: 50W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15°  
 材质Material: 压铸铝 Die-casting Aluminum  
 防护等级: IP65



单位 Units:mm



**型号 Item NO: BRL-TGD-10-100W-15°**

尺寸Size: 390X285XH130mm  
 功率Power: 100W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15°  
 材质Material: 压铸铝 Die-casting Aluminum  
 防护等级: IP65



单位 Units:mm



**型号 Item NO: BRL-TGD-10-200W-15°**

尺寸Size: 390X350XH170mm  
 功率Power: 200W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15°  
 材质Material: 压铸铝 Die-casting Aluminum  
 防护等级: IP65



单位 Units:mm





**型号 Item NO: BRL-TGD-4-30W**

尺寸Size: 200X180XH120mm  
功率Power: 150W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle: 120°  
材质Material: 压铸铝 Die-casting Aluminum  
防护等级: IP65



单位 Units:mm



**型号 Item NO: BRL-TGD-4-100W**

尺寸Size: 370X280XH160mm  
功率Power: 100W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle: 120°  
材质Material: 压铸铝 Die-casting Aluminum  
防护等级: IP65



单位 Units:mm



**型号 Item NO: BRL-TGD-4-150W**

尺寸Size: 430X365XH210mm  
功率Power: 50WX3  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle: 120°  
材质Material: 压铸铝 Die-casting Aluminum  
防护等级: IP65



单位 Units:mm





**型号 Item NO: BRL-TGD-1-30W**

尺寸Size: 205X165XH100mm  
 功率Power: 30W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 90°  
 材质Material: 压铸铝 Die-casting Aluminum  
 防护等级: IP65



单位 Units:mm



**型号 Item NO: BRL-TGD-1-50W**

尺寸Size: 250X200XH110mm  
 功率Power: 50W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 90°  
 材质Material: 压铸铝 Die-casting Aluminum  
 防护等级: IP65



单位 Units:mm



**型号 Item NO: BRL-TGD-1-100W**

尺寸Size: 370X235XH145mm  
 功率Power: 50WX2  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 9°  
 材质Material: 压铸铝 Die-casting Aluminum  
 防护等级: IP65



单位 Units:mm



**型号 Item NO: BRL-TGD-1-150W**

尺寸Size: 515X235XH160mm  
 功率Power: 50WX3  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 9°  
 材质Material: 压铸铝 Die-casting Aluminum  
 防护等级: IP65



单位 Units:mm







## LED Flood Light Series LED户外投光灯系列



型号Item NO	BRL-TGD-2-10W	BRL-TGD-2-20W	BRL-TGD-2-30W	BRL-TGD-2-50W
尺寸Size	115X87XH82mm	180X140XH110mm	225X185XH120mm	285X230XH190mm
功率Power	10W	20W	30W	50W
输入电压Input	85-265V			
色温Color Temperature	3000K/6000K			
显指C.R.I	82Ra			
光束角Beam Angle	120°			
材质Material	压铸铝 Die-casting Aluminum			
防护等级	IP65			

单位 Units:mm



型号Item NO	BRL-TGD-2-70W	BRL-TGD-2-100W
尺寸Size	370X285XH175mm	370X285XH175mm
功率Power	70W	100W
输入电压Input	85-265V	
色温Color Temperature	3000K/6000K	
显指C.R.I	82Ra	
光束角Beam Angle	120°	
材质Material	压铸铝 Die-casting Aluminum	
防护等级	IP65	

单位 Units:mm



LED Flood Light Series  
LED户外投光灯系列



型号 Item NO: BRL-TGD-8-10W

功率Power: 10W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/6000K  
 显指C.R.I.: 75Ra  
 光束角Beam Angle: 60° 120°  
 材质Material: 压铸铝 Die-casting Aluminum  
 防护等级: IP65  
 亮灯时间Workingtim: 4小时/4h  
 3.7V锂电池容量3.7V Lithium battery capacity: 4400mah



单位 Units:mm



型号 Item NO: BRL-TGD-8-20W

功率Power: 20W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/6000K  
 显指C.R.I.: 75Ra  
 光束角Beam Angle: 60° 120°  
 材质Material: 压铸铝 Die-casting Aluminum  
 防护等级: IP65  
 亮灯时间Workingtim: 4小时/4h  
 3.7V锂电池容量3.7V Lithium battery capacity: 4400mah



单位 Units:mm




型号 Item NO: BRL-TGD-8-15W

功率Power: 15W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/6000K  
 显指C.R.I.: 75Ra  
 光束角Beam Angle: 60° 120°  
 材质Material: 压铸铝 Die-casting Aluminum  
 防护等级: IP65  
 亮灯时间Workingtim: 4小时/4h  
 3.7V锂电池容量3.7V Lithium battery capacity: 4400mah



单位 Units:mm





## LED Charging Flood Light Series LED充电投光灯系列



### 型号 Item NO: BRL-TGA56-24W

尺寸Size: 190X160XH280mm  
功率Power: 24W  
输入电压Input: 85-265V/12V/24V  
色温Color Temperature: 3000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle: 15° 25° 40° 60°  
材质Material: 压铸铝 Die-casting Aluminum  
防护等级: IP65



单位 Units: mm




### 型号 Item NO: BRL-TGA57-36W

尺寸Size: 310X280XH140mm  
功率Power: 36W  
输入电压Input: 85-265V/12V/24V  
色温Color Temperature: 3000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle: 15° 25° 40° 60°  
材质Material: 压铸铝 Die-casting Aluminum  
防护等级: IP65



单位 Units: mm

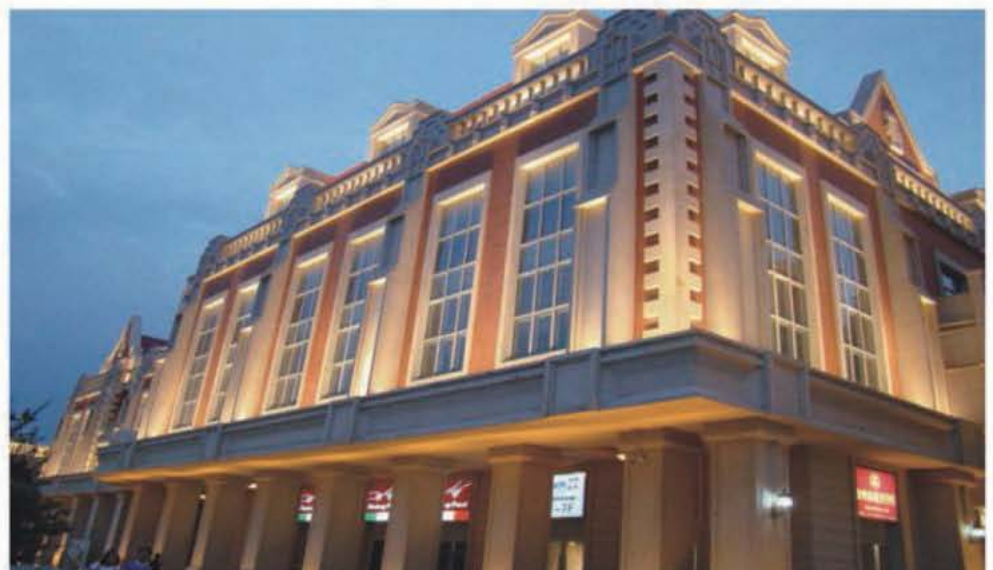



## LED Flood Light Series LED户外投光灯系列



单位 Units:mm



型号Item NO	BRL-TGA80-3X3W	BRL-TGA81-9X2W
尺寸Size	Φ85XH150mm	Φ130XH210mm
功率Power	3X3W	9X2W
输入电压Input	85-265V/12V/24V	
色温Color Temperature	3000K/6000K	
显指C.R.I	82Ra	
光束角Beam Angle	15° 25° 40° 60°	
材质Material	压铸铝 Die-casting Aluminum	
防护等级	IP65	



单位 Units:mm



### 型号 Item NO:BRL-TGA60-18W

尺寸Size:Φ180XH300mm  
功率Power:18W  
输入电压Input:85-265V/12V/24V  
色温Color Temperature:3000K/6000K  
显指C.R.I:82Ra  
光束角Beam Angle:15° 25° 40° 60°  
材质Material:压铸铝 Die-casting Aluminum  
防护等级: IP65



单位 Units:mm



### 型号 Item NO:BRL-TGA94-36W

尺寸Size:Φ200XH220mm  
功率Power:36W  
输入电压Input:85-265V/12V/24V  
色温Color Temperature:3000K/6000K  
显指C.R.I:82Ra  
光束角Beam Angle:15° 25° 40° 60°  
材质Material:压铸铝 Die-casting Aluminum  
防护等级: IP65



单位 Units:mm



### 型号 Item NO:BRL-TGA46-12W

尺寸Size:Φ150XH142mm  
功率Power:12W  
输入电压Input:85-265V/12V/24V  
色温Color Temperature:3000K/6000K  
显指C.R.I:82Ra  
光束角Beam Angle:15° 25° 40° 60°  
材质Material:压铸铝 Die-casting Aluminum  
防护等级: IP65



单位 Units:mm



### 型号 Item NO:BRL-TGA47-18W

尺寸Size:Φ200XH220mm  
功率Power:36W  
输入电压Input:85-265V/12V/24V  
色温Color Temperature:3000K/6000K  
显指C.R.I:82Ra  
光束角Beam Angle:15° 25° 40° 60°  
材质Material:压铸铝 Die-casting Aluminum  
防护等级: IP65



单位 Units:mm



### 型号 Item NO:BRL-TGA40-4W

尺寸Size:Φ95XH110mm  
功率Power:4W  
输入电压Input:85-265V/12V/24V  
色温Color Temperature:3000K/6000K/RGB  
显指C.R.I:82Ra  
光束角Beam Angle:15° 25° 40° 60°  
材质Material:压铸铝 Die-casting Aluminum  
防护等级: IP65



# LED Flood Light Series LED户外投光灯系列



单位 Units:mm



### 型号 Item NO:BRL-TGA41-7W

尺寸Size:Φ125XH140mm  
功率Power:7W  
输入电压Input:85-265V/12V/24V  
色温Color Temperature:3000K/6000K/RGB  
显指C.R.I:82Ra  
光束角Beam Angle:15° 25° 40° 60°  
材质Material:压铸铝 Die-casting Aluminum  
防护等级: IP65



单位 Units:mm



### 型号 Item NO:BRL-TGA42-12W

尺寸Size:Φ155XH195mm  
功率Power:12W  
输入电压Input:85-265V/12V/24V  
色温Color Temperature:3000K/6000K/RGB  
显指C.R.I:82Ra  
光束角Beam Angle:15° 25° 40° 60°  
材质Material:压铸铝 Die-casting Aluminum  
防护等级: IP65



单位 Units:mm



### 型号 Item NO:BRL-TGA43-18W

尺寸Size:Φ185XH205mm  
功率Power:18W  
输入电压Input:85-265V/12V/24V  
色温Color Temperature:3000K/6000K/RGB  
显指C.R.I:82Ra  
光束角Beam Angle:15° 25° 40° 60°  
材质Material:压铸铝 Die-casting Aluminum  
防护等级: IP65



单位 Units:mm



### 型号 Item NO:BRL-TGA45-24W

尺寸Size:Φ235XH265mm  
功率Power:24W  
输入电压Input:85-265V/12V/24V  
色温Color Temperature:3000K/6000K/RGB  
显指C.R.I:82Ra  
光束角Beam Angle:15° 25° 40° 60°  
材质Material:压铸铝 Die-casting Aluminum  
防护等级: IP65





LED Outdoor Spot Light Series  
LED户外射灯系列



单位 Units:mm



**型号 Item NO: BRL-HWSD-4-3X1W**

尺寸Size:  $\Phi 50 \times H 95 \text{mm}$   
 功率Power: 3W  
 输入电压Input: 85-265V/12V/24V  
 色温Color Temperature: 3000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 压铸铝 Die-casting Aluminum  
 防护等级: IP65



单位 Units:mm



**型号 Item NO: BRL-HWSD-7-3W**

尺寸Size:  $\Phi 85 \times H 110 \text{mm}$   
 功率Power: 3X1W  
 输入电压Input: 85-265V/12V/24V  
 色温Color Temperature: 3000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 压铸铝 Die-casting Aluminum  
 防护等级: IP65



单位 Units:mm



**型号 Item NO: BRL-HWSD-5-3W**

尺寸Size:  $\Phi 75 \times H 120 \text{mm}$   
 功率Power: 3W  
 输入电压Input: 85-265V/12V/24V  
 色温Color Temperature: 3000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 压铸铝 Die-casting Aluminum  
 防护等级: IP65



单位 Units:mm



**型号 Item NO: BRL-HWSD-5-6W**

尺寸Size:  $\Phi 90 \times H 130 \text{mm}$   
 功率Power: 6W  
 输入电压Input: 85-265V/12V/24V  
 色温Color Temperature: 3000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 压铸铝 Die-casting Aluminum  
 防护等级: IP65



单位 Units:mm



**型号 Item NO: BRL-HWSD-5-9W**

尺寸Size:  $\Phi 110 \times H 130 \text{mm}$   
 功率Power: 9W  
 输入电压Input: 85-265V/12V/24V  
 色温Color Temperature: 3000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 压铸铝 Die-casting Aluminum  
 防护等级: IP65



单位 Units:mm



**型号 Item NO: BRL-HWSD-5-12W**

尺寸Size:  $\Phi 135 \times H 170 \text{mm}$   
 功率Power: 12W  
 输入电压Input: 85-265V/12V/24V  
 色温Color Temperature: 3000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 压铸铝 Die-casting Aluminum  
 防护等级: IP65






LED Outdoor Spot Light Series  
LED户外射灯系列



型号Item NO	尺寸Size	功率Power	输入电压Input	色温Color Temperature	显指C.R.I	光束角Beam Angle	材质Material	防护等级
BRL-HS-26-10W	Φ66XH150mm	10W	85V-265V 12V/24V	3000K4000K/6000K	80	15° 36° 60°	铝材 Aluminum	IP65
BRL-HS-26-20W	Φ90XH170mm	20W						
BRL-HS-26-30W	Φ113XH250mm	30W						
BRL-HS-26-50W	Φ153XH280mm	50W						

单位 Units:mm

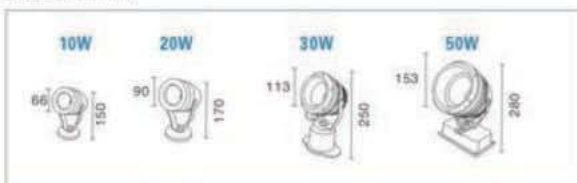




LED Wall Wash Series  
LED洗墙灯系列



型号Item NO	功率Power	尺寸Size	输入电压Input	色温Color Temperature	防护等级	光束角Beam Angle	材质Material
BRL-MNXQD-15W	15W	W25XH30XL1000mm	12V/24V	3000K	IP65	15° 25° 40° 60°	铝材 Aluminum
BRL-MNXQD-7.5W	7.5W	W25XH30XL500mm					
BRL-MNXQD-4W	4W	W25XH30XL300mm					




LED Wall Wash Series  
LED洗墙灯系列

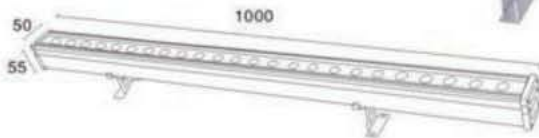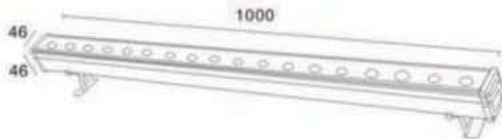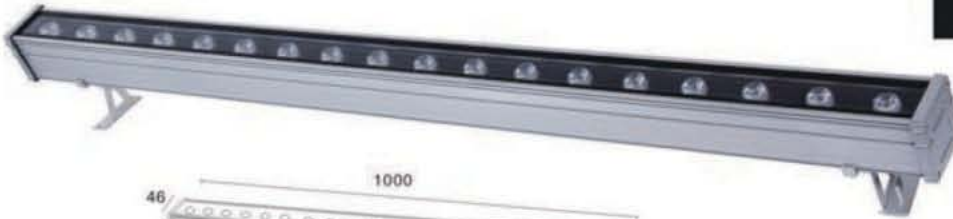

型号Item NO	功率Power	尺寸Size	输入电压Input	色温Color Temperature	防护等级	光束角Beam Angle	材质Material
BRL-XQD-9W	9W	W46XH46X500mm	85V-265V 12V/24V	3000K/4000K /6000K/RGB	IP65	15° 25° 40° 60°	铝材 Aluminum
BRL-XQD-12W	12W	W46XH46X1000mm					
BRL-XQD-18W	18W	W46XH46X1000mm					
BRL-XQD-24W	24W	W50XH55X1000mm					
BRL-XQD-27W	27W	W50XH55X1000mm					
BRL-XQD-36W	36W	W50XH55X1000mm					



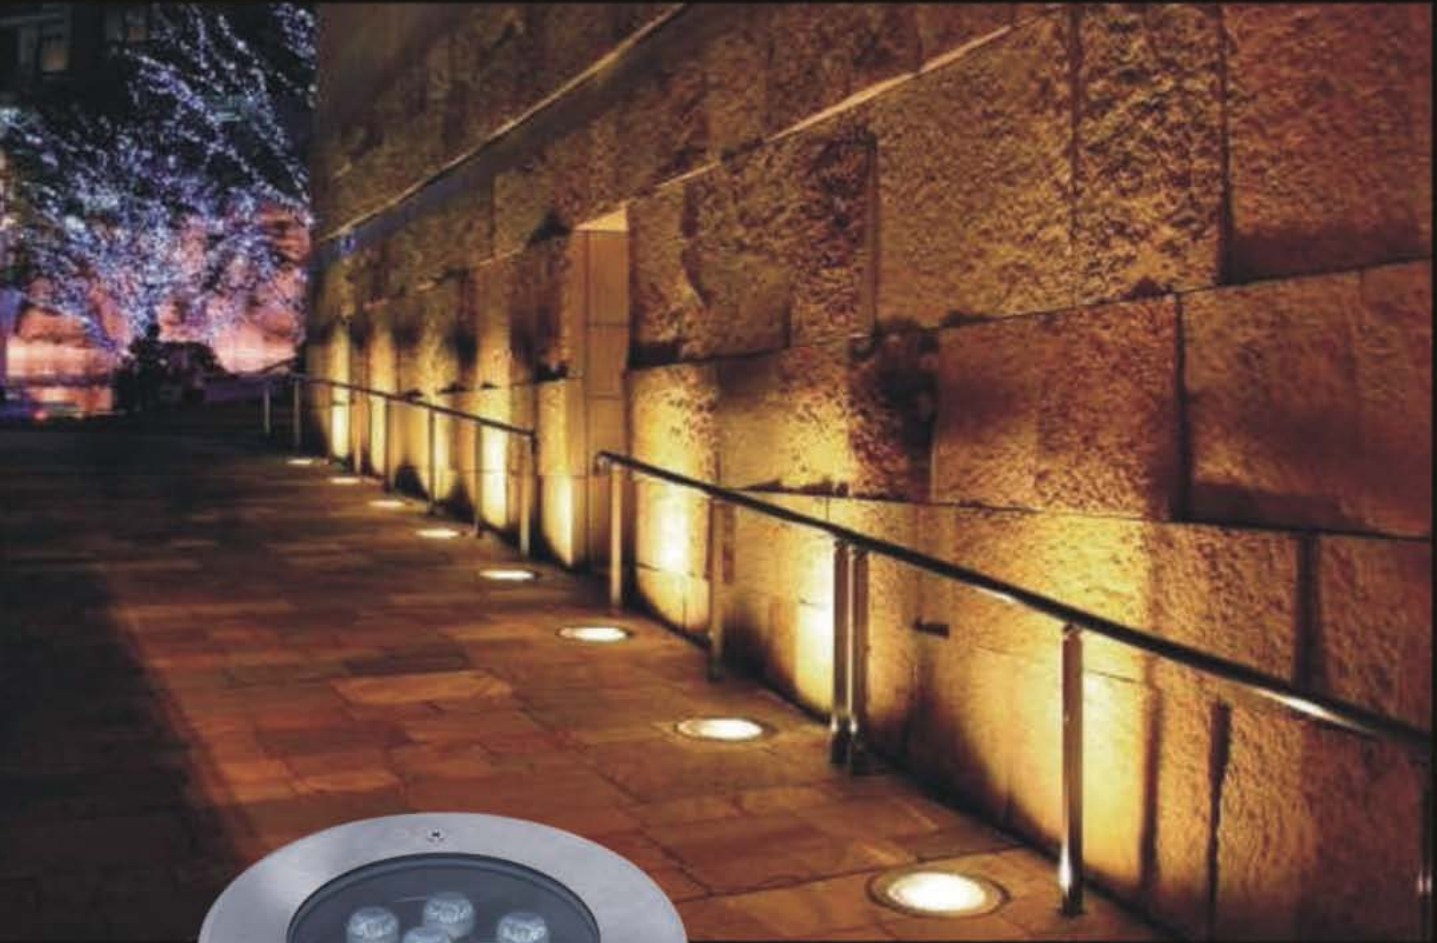

LED Ground Light Series  
LED地埋灯系列



**型号 Item NO: BRL-DMA01-1W**

尺寸Size:  $\Phi 52 \times H 70 \text{mm}$   
 开孔Cutting:  $\Phi 47 \times H 70 \text{mm}$   
 功率Power: 7W  
 输入电压Input: 85-265V/12V/24V  
 色温Color Temperature: 3000K/4000K/6000K/RGB  
 显指C.R.I.: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 不锈钢+铝 Stainless Steel+ Aluminum  
 防护等级: IP65



单位 Units:mm



**型号 Item NO: BRL-DMA07-3W**

尺寸Size:  $\Phi 100 \times H 80 \text{mm}$   
 开孔Cutting:  $\Phi 96 \times H 75 \text{mm}$   
 功率Power: 3W  
 输入电压Input: 85-265V/12V/24V  
 色温Color Temperature: 3000K/4000K/6000K/RGB  
 显指C.R.I.: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 不锈钢+铝 Stainless Steel+ Aluminum  
 防护等级: IP65



单位 Units:mm



**型号 Item NO: BRL-DMA09-5W**

尺寸Size:  $\Phi 120 \times H 108 \text{mm}$   
 开孔Cutting:  $\Phi 115 \times H 105 \text{mm}$   
 功率Power: 5W  
 输入电压Input: 85-265V/12V/24V  
 色温Color Temperature: 3000K/4000K/6000K/RGB  
 显指C.R.I.: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 不锈钢+铝 Stainless Steel+ Aluminum  
 防护等级: IP65



单位 Units:mm




**型号 Item NO: BRL-DMA11-7W**

尺寸Size:  $\Phi 130 \times H 90 \text{mm}$   
 开孔Cutting:  $\Phi 120 \times H 90 \text{mm}$   
 功率Power: 7W  
 输入电压Input: 85-265V/12V/24V  
 色温Color Temperature: 3000K/4000K/6000K/RGB  
 显指C.R.I.: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 不锈钢+铝 Stainless Steel+ Aluminum  
 防护等级: IP65



单位 Units:mm






**型号 Item NO: BRL-DMA15-9W**

尺寸Size:  $\Phi 160 \times H95 \text{mm}$   
 开孔Cutting:  $\Phi 145 \times H90 \text{mm}$   
 功率Power: 9W  
 输入电压Input: 85-265V/12V/24V  
 色温Color Temperature: 3000K/4000K/6000K/RGB  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 不锈钢+铝 Stainless Steel+ Aluminum  
 防护等级: IP65



单位 Units:mm




**型号 Item NO: BRL-DMA16-12W**

尺寸Size:  $\Phi 180 \times H95 \text{mm}$   
 开孔Cutting:  $\Phi 160 \times H90 \text{mm}$   
 功率Power: 12W  
 输入电压Input: 85-265V/12V/24V  
 色温Color Temperature: 3000K/4000K/6000K/RGB  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 不锈钢+铝 Stainless Steel+ Aluminum  
 防护等级: IP65



单位 Units:mm




**型号 Item NO: BRL-DMA19-18W**

尺寸Size:  $\Phi 200 \times H93 \text{mm}$   
 开孔Cutting:  $\Phi 190 \times H90 \text{mm}$   
 功率Power: 18W  
 输入电压Input: 85-265V/12V/24V  
 色温Color Temperature: 3000K/4000K/6000K/RGB  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 不锈钢+铝 Stainless Steel+ Aluminum  
 防护等级: IP65



单位 Units:mm



**型号 Item NO: BRL-DMA21-24W**

尺寸Size:  $\Phi 230 \times H95 \text{mm}$   
 开孔Cutting:  $\Phi 210 \times H92 \text{mm}$   
 功率Power: 24W  
 输入电压Input: 85-265V/12V/24V  
 色温Color Temperature: 3000K/4000K/6000K/RGB  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 不锈钢+铝 Stainless Steel+ Aluminum  
 防护等级: IP65



单位 Units:mm








**型号 Item NO: BRL-DME21-6W**

尺寸Size: 300X90XH75mm  
开孔Cutting: 286X77XH70mm  
功率Power: 6W  
输入电压Input: 85-265V/12V/24V  
色温Color Temperature: 3000K/4000K/6000K/RGB  
显指C.R.I: 82Ra  
光束角Beam Angle: 15° 25° 40° 60°  
材质Material: 不锈钢 + 铝 Stainless Steel + Aluminum  
防护等级: IP65



单位 Units: mm

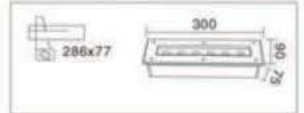

**型号 Item NO: BRL-DME31-24W**

尺寸Size: 1000X70XH75mm  
开孔Cutting: 985X60X75mm  
功率Power: 24W  
输入电压Input: 85-265V/12V/24V  
色温Color Temperature: 3000K/4000K/6000K/RGB  
显指C.R.I: 82Ra  
光束角Beam Angle: 15° 25° 40° 60°  
材质Material: 不锈钢 + 铝 Stainless Steel + Aluminum  
防护等级: IP65




单位 Units: mm



LED Ground Light Series  
LED地埋灯系列



单位 Units:mm



型号 Item NO: BRL-HSMDD-1

尺寸Size:  $\Phi 50 \times H90$ mm  
功率Power: 1W  
输入电压Input: 85-265V/12V/24V  
色温Color Temperature: 3000K/4000K/6000K/RGB  
显指C.R.I: 82Ra  
光束角Beam Angle: 15° 25° 40° 60°  
材质Material: 压铸铝 Die-Casting Aluminum  
防护等级: IP65



单位 Units:mm




型号 Item NO: BRL-COBMDD-20W

尺寸Size:  $\Phi 178 \times H200$ mm  
开孔Cutting:  $\Phi 168 \times H200$ mm  
功率Power: 20W  
输入电压Input: 85-265V/12V/24V  
色温Color Temperature: 3000K/4000K/6000K/RGB  
显指C.R.I: 82Ra  
光束角Beam Angle: 15° 25° 40° 60°  
材质Material: 不锈钢+铝 Stainless Steel+ Aluminum  
防护等级: IP65



单位 Units:mm




型号 Item NO: BRL-HSMDD-3

尺寸Size:  $\Phi 100 \times H105$ mm  
开孔Cutting:  $\Phi 96 \times H75$ mm  
功率Power: 3W  
输入电压Input: 85-265V/12V/24V  
色温Color Temperature: 3000K/4000K/6000K/RGB  
显指C.R.I: 82Ra  
光束角Beam Angle: 15° 25° 40° 60°  
材质Material: 不锈钢+铝 Stainless Steel+ Aluminum  
防护等级: IP65



单位 Units:mm




型号 Item NO: BRL-HSMDD-5

尺寸Size:  $\Phi 120 \times H115$ mm  
开孔Cutting:  $\Phi 117 \times H75$ mm  
功率Power: 5X1W  
输入电压Input: 85-265V/12V/24V  
色温Color Temperature: 3000K/4000K/6000K/RGB  
显指C.R.I: 82Ra  
光束角Beam Angle: 15° 25° 40° 60°  
材质Material: 不锈钢+铝 Stainless Steel+ Aluminum  
防护等级: IP65




单位 Units:mm



型号 Item NO: BRL-HSMDD-7

尺寸Size:  $\Phi 150 \times H115$ mm  
开孔Cutting:  $\Phi 140 \times H88$ mm  
功率Power: 7X1W  
输入电压Input: 85-265V/12V/24V  
色温Color Temperature: 3000K/4000K/6000K/RGB  
显指C.R.I: 82Ra  
光束角Beam Angle: 15° 25° 40° 60°  
材质Material: 不锈钢+铝 Stainless Steel+ Aluminum  
防护等级: IP65



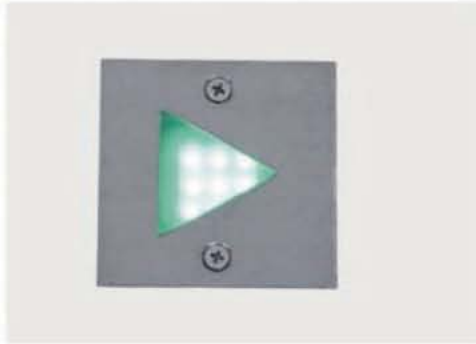


**型号 Item NO: BRL-QJA02-1W**

尺寸Size: 70X70XH55mm  
开孔Cutting: 68x68XH55mm  
功率Power: 1W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I: 82Ra  
材质Material: 铝 Aluminum  
防护等级: IP65



单位 Units:mm




**型号 Item NO: BRL-QJA09-3W**

尺寸Size: 110X45XH55mm  
开孔Cutting: 108X43XH55mm  
功率Power: 3W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle: 25°  
材质Material: 铝 Aluminum  
防护等级: IP65



单位 Units:mm




**型号 Item NO: BRL-QJA26-4W**

尺寸Size: 170X70XH55mm  
开孔Cutting: 163X163XH55mm  
功率Power: 4W  
输入电压Input: 85-265V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle: 25°  
材质Material: 铝 Aluminum  
防护等级: IP65



单位 Units:mm




**型号 Item NO: BRL-SN026**

尺寸Size: 86X86X30mm  
开孔Cutting: 80x80mm  
功率Power: 1.5W  
输入电压Input: 160-240V  
色温Color Temperature: 3000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle: 90°  
亮灯时间 Working time: 60秒 60S  
感应距离Sensor distance: 1-3m  
材质Material: 压铸铝 (Die-casting Aluminum)  
颜色: 白/黑/沙灰  
Color: White/Black/Grey  
防护等级: IP65



单位 Units:mm





LED Outdoor Step Light Series  
LED户外墙角灯系列



型号 Item NO: BRL-WHQJD-1-3WA

尺寸Size: 97X160XH65mm  
 开孔Cutting: 156x95XH65mm  
 功率Power: 3W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 25°  
 材质Material: 铝材Aluminum  
 防护等级: IP65



单位 Units:mm




型号 Item NO: BRL-WHQJD-1-3WB

尺寸Size: 160X97XH65mm  
 开孔Cutting: 156x95XH65mm  
 功率Power: 3W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 25°  
 材质Material: 铝材Aluminum  
 防护等级: IP65



单位 Units:mm




型号 Item NO: BRL-WHQJD-3-3W

尺寸Size: 155X68XH73mm  
 开孔Cutting: 153x68XH73mm  
 功率Power: 3W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 25°  
 材质Material: 铝Aluminum  
 防护等级: IP65



单位 Units:mm




型号 Item NO: BRL-WHQJD-2-6W

尺寸Size: 253X70XH95mm  
 开孔Cutting: 249x69XH95mm  
 功率Power: 6W  
 输入电压Input: 85-265V  
 色温Color Temperature: 3000K/6000K  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 25°  
 材质Material: 铝Aluminum  
 防护等级: IP65




单位 Units:mm






**型号 Item NO: BRL-DCA16-3W**

尺寸Size:  $\Phi 85 \times 150 \times H340$ mm  
功率Power: 3W  
输入电压Input: 85-265V/12V/24V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle: 15° 25° 40° 60°  
材质Material: 铝材Aluminum  
防护等级: IP65

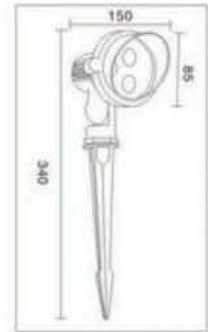


**型号 Item NO: BRL-DCA03-3W**

尺寸Size:  $\Phi 80 \times 110 \times H280$ mm  
功率Power: 3W  
输入电压Input: 85-265V/12V/24V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle: 15° 25° 40° 60°  
材质Material: 铝材Aluminum  
防护等级: IP65

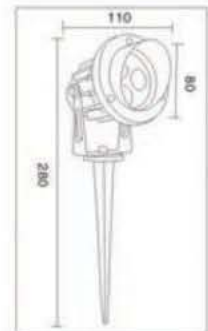

**型号 Item NO: BRL-DCA04-3W**

尺寸Size:  $\Phi 75 \times 70 \times H270$ mm  
功率Power: 3W  
输入电压Input: 85-265V/12V/24V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle: 15° 25° 40° 60°  
材质Material: 铝材Aluminum  
防护等级: IP65

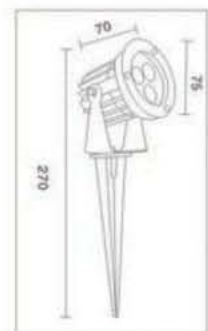



**型号 Item NO: BRL-DCA27-7W**

尺寸Size:  $\Phi 105 \times 180 \times H390$ mm  
功率Power: 7W  
输入电压Input: 85-265V/12V/24V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle: 15° 25° 40° 60°  
材质Material: 铝材Aluminum  
防护等级: IP65



**型号 Item NO: BRL-DCA41-12W**

尺寸Size:  $\Phi 160 \times 260 \times H335$ mm  
功率Power: 12W  
输入电压Input: 85-265V/12V/24V  
色温Color Temperature: 3000K/4000K/6000K  
显指C.R.I: 82Ra  
光束角Beam Angle: 15° 25° 40° 60°  
材质Material: 铝材Aluminum  
防护等级: IP65








**型号 Item NO: BRL-SDD02-1W**

尺寸Size:  $\Phi 52 \times H 80 \text{mm}$   
 开孔Cutting:  $\Phi 49 \times H 80 \text{mm}$   
 功率Power: 1W  
 输入电压Input: 12V/24V  
 色温Color Temperature: 3000K/4000K/6000K/RGB  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 不锈钢 Stainless steel  
 防护等级: IP68



单位 Units: mm



**型号 Item NO: BRL-SDD05-1W**

尺寸Size:  $\Phi 65 \times H 90 \text{mm}$   
 开孔Cutting:  $\Phi 61 \times H 90 \text{mm}$   
 功率Power: 1W  
 输入电压Input: 12V/24V  
 色温Color Temperature: 3000K/4000K/6000K/RGB  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 不锈钢 Stainless steel  
 防护等级: IP68



单位 Units: mm




**型号 Item NO: BRL-SDD-3W**

尺寸Size:  $\Phi 100 \times H 75 \text{mm}$   
 开孔Cutting:  $\Phi 90 \times H 70 \text{mm}$   
 功率Power: 3W  
 输入电压Input: 12V/24V  
 色温Color Temperature: 3000K/4000K/6000K/RGB  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 不锈钢 Stainless steel  
 防护等级: IP68



单位 Units: mm



**型号 Item NO: BRL-SDD-6W**

尺寸Size:  $\Phi 150 \times H 115 \text{mm}$   
 开孔Cutting:  $\Phi 140 \times H 106 \text{mm}$   
 功率Power: 6W  
 输入电压Input: 12V/24V  
 色温Color Temperature: 3000K/4000K/6000K/RGB  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 不锈钢 Stainless steel  
 防护等级: IP68



单位 Units: mm



**型号 Item NO: BRL-SDD-9W**

尺寸Size:  $\Phi 180 \times H 110 \text{mm}$   
 开孔Cutting:  $\Phi 170 \times H 106 \text{mm}$   
 功率Power: 9W  
 输入电压Input: 12V/24V  
 色温Color Temperature: 3000K/4000K/6000K/RGB  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 不锈钢 Stainless steel  
 防护等级: IP68



单位 Units:mm




**型号 Item NO: BRL-SDD-12W**

尺寸Size:  $\Phi 180 \times H 110 \text{mm}$   
 开孔Cutting:  $\Phi 170 \times H 106 \text{mm}$   
 功率Power: 12W  
 输入电压Input: 12V/24V  
 色温Color Temperature: 3000K/4000K/6000K/RGB  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 不锈钢 Stainless steel  
 防护等级: IP68



单位 Units:mm




**型号 Item NO: BRL-SDD-18W**

尺寸Size:  $\Phi 210 \times H 112 \text{mm}$   
 开孔Cutting:  $\Phi 200 \times H 106 \text{mm}$   
 功率Power: 18W  
 输入电压Input: 12V/24V  
 色温Color Temperature: 3000K/4000K/6000K/RGB  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 不锈钢 Stainless steel  
 防护等级: IP68



单位 Units:mm




**型号 Item NO: BRL-SDD-24W**

尺寸Size:  $\Phi 250 \times H 115 \text{mm}$   
 开孔Cutting:  $\Phi 240 \times H 106 \text{mm}$   
 功率Power: 24W  
 输入电压Input: 12V/24V  
 色温Color Temperature: 3000K/4000K/6000K/RGB  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 不锈钢 Stainless steel  
 防护等级: IP68



单位 Units:mm





**型号 Item NO: BRL-SDD10-5W**

尺寸Size:  $\Phi 120 \times H90$ mm  
 开孔Cutting:  $\Phi 110 \times H85$ mm  
 功率Power: 5W  
 输入电压Input: 12V/24V  
 色温Color Temperature: 3000K/4000K/6000K/RGB  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 不锈钢 Stainless steel  
 防护等级: IP68



单位 Units:mm




**型号 Item NO: BRL-SDD12-9W**

尺寸Size:  $\Phi 150 \times H90$ mm  
 开孔Cutting:  $\Phi 140 \times H90$ mm  
 功率Power: 9W  
 输入电压Input: 12V/24V  
 色温Color Temperature: 3000K/4000K/6000K/RGB  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 不锈钢 Stainless steel  
 防护等级: IP68



单位 Units:mm



**型号 Item NO: BRL-SDD14-12W**

尺寸Size:  $\Phi 170 \times H130$ mm  
 开孔Cutting:  $\Phi 160 \times H130$ mm  
 功率Power: 12W  
 输入电压Input: 12V/24V  
 色温Color Temperature: 3000K/4000K/6000K/RGB  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 不锈钢 Stainless steel  
 防护等级: IP68



单位 Units:mm




**型号 Item NO: BRL-SDD16-18W**

尺寸Size:  $\Phi 200 \times H110$ mm  
 开孔Cutting:  $\Phi 190 \times H110$ mm  
 功率Power: 18W  
 输入电压Input: 12V/24V  
 色温Color Temperature: 3000K/4000K/6000K/RGB  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 不锈钢 Stainless steel  
 防护等级: IP68



单位 Units:mm





LED Economical Underwater Light Series  
LED经济型水底灯系列

型号 Item NO: BRL-MZSD-3W

尺寸Size:  $\Phi 82 \times H 140 \text{mm}$   
 功率Power: 3X1W  
 输入电压Input: 12V/24V  
 色温Color Temperature: 3000K/4000K/6000K/RGB  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 不锈钢 Stainless steel  
 防护等级: IP68



单位 Units:mm



型号 Item NO: BRL-MZSD-6W

尺寸Size:  $\Phi 120 \times H 140 \text{mm}$   
 功率Power: 6X1W  
 输入电压Input: 12V/24V  
 色温Color Temperature: 3000K/4000K/6000K/RGB  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 不锈钢 Stainless steel  
 防护等级: IP68



单位 Units:mm



型号 Item NO: BRL-MZSD-9W

尺寸Size:  $\Phi 144 \times H 160 \text{mm}$   
 功率Power: 9X1W  
 输入电压Input: 12V/24V  
 色温Color Temperature: 3000K/4000K/6000K/RGB  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 不锈钢 Stainless steel  
 防护等级: IP68



单位 Units:mm



型号 Item NO: BRL-MZSD-12W

尺寸Size:  $\Phi 160 \times H 220 \text{mm}$   
 功率Power: 12X1W  
 输入电压Input: 12V/24V  
 色温Color Temperature: 3000K/4000K/6000K/RGB  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 不锈钢 Stainless steel  
 防护等级: IP68



单位 Units:mm





**Item NO: BRL-MZSD-15W**



R.,t Size: <P190XH205mm  
 JJJ Power: 15X1W  
 tt >.liU Input t 2V/24V  
 @.:.ilColor Temperature 3000K/4000K/6000K/RGB  
 JIf liC.R.I: 82Ra  
**liMBeam** Angle: 15° 25 40 60"  
**81Matenat::r-ut111** S1ainless steel  
**M Wta:** IP68



Unit: mm



**Item NO: BRL-MZSD-18W**



R.,t Size: <P190XH205mm  
 JJJ Power: 18X1W  
 • >-li Input 12V/24V  
 @.illColor Temperature : 3000K/4000K/6000K/RGB  
 B fliC.A.I: 82Ra  
**liMBoam** Angle: 15° 25 40' 60-  
**/Matoiat:f-ut111** Stainless steel  
**M W!i:** IP68



**Item NO: BRL-MZSD-24W**



R.'1'Size <P220 XH235mm  
 JJJ Power: 24X1W  
 •>-li Input 12V/24V  
 @.illColor Temperature : 3000K/4000K/6000K/AGB  
**B fliCR** I: 82Ra  
 - **MBeam** Angle: 15 25 40 60  
**ft ft Matenatf-U111** Stainless steel  
**M •U.II:** IP88



单位 Units: mm








**型号 Item NO: BRL-SDB05-6W**

尺寸Size:  $\Phi 130 \times H75$ mm  
功率Power: 6W  
输入电压Input: 12V/24V  
色温Color Temperature: 3000K/4000K/6000K/RGB  
显指C.R.I: 82Ra  
光束角Beam Angle: 15° 25° 40° 60°  
材质Material: 不锈钢 Stainless steel  
防护等级: IP68



单位 Units:mm

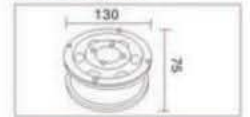


**型号 Item NO: BRL-SDB06-9W**

尺寸Size:  $\Phi 160 \times H85$ mm  
功率Power: 9W  
输入电压Input: 12V/24V  
色温Color Temperature: 3000K/4000K/6000K/RGB  
显指C.R.I: 82Ra  
光束角Beam Angle: 15° 25° 40° 60°  
材质Material: 不锈钢 Stainless steel  
防护等级: IP68



单位 Units:mm

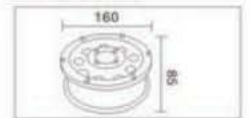


**型号 Item NO: BRL-SDB07-12W**

尺寸Size:  $\Phi 180 \times H85$ mm  
功率Power: 12W  
输入电压Input: 12V/24V  
色温Color Temperature: 3000K/4000K/6000K/RGB  
显指C.R.I: 82Ra  
光束角Beam Angle: 15° 25° 40° 60°  
材质Material: 不锈钢 Stainless steel  
防护等级: IP68



单位 Units:mm

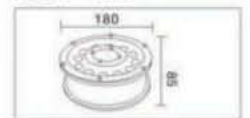


LED Pool Light Series  
LED水池壁灯系列



型号Item NO	BRL-SDB01-6W	BRL-SDB01-12W
尺寸Size	Φ230XH40mm	Φ230XH40mm
功率Power	6W	12W
输入电压Input	12V/24V	12V/24V
色温Color Temperature	3000K/4000K/6000K/RGB	RGB
显指C.R.I	82Ra	
光束角Beam Angle	15° 25° 40° 60°	
材质Material	不锈钢 Stainless steel	
防护等级	Ip68	


单位 Units:mm

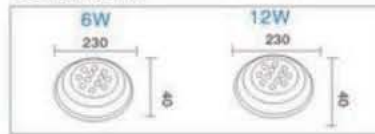

型号 Item NO: BRL-SDB03-12W

尺寸Size: Φ290XH40mm  
 功率Power: 12W  
 输入电压Input: 12V/24V  
 色温Color Temperature: 3000K/4000K/6000K/RGB  
 显指C.R.I: 82Ra  
 光束角Beam Angle: 15° 25° 40° 60°  
 材质Material: 不锈钢 Stainless steel  
 防护等级: IP68

单位 Units:mm






## LED Wall Lawn Light Series LED户外草坪灯系列



<b>型号Item No2</b>	<b>BRL-XJ-CP-13-6W</b>
尺寸Size	Φ60XH170mm
功率Power	6W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80/90Ra
光束角Beam Angle	24°
材质Material	铝材Aluminum
防护等级 Protection grade	IP65

单位 Units:mm

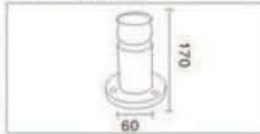


<b>型号Item No2</b>	<b>BRL-XJ-CP-14-6W</b>
尺寸Size	Φ80XH180mm
功率Power	6W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80/90Ra
光束角Beam Angle	24°
材质Material	铝材Aluminum
防护等级 Protection grade	IP65

单位 Units:mm




<b>型号Item No2</b>	<b>BRL-XJ-CP-11-6W</b>
尺寸Size	Φ90XH300mm
功率Power	6W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80/90Ra
光束角Beam Angle	24°
材质Material	铝材Aluminum
防护等级 Protection grade	IP65

单位 Units:mm

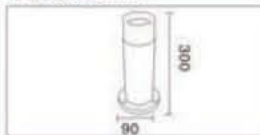

<b>型号Item No2</b>	<b>BRL-XJ-CP-12-6W</b>
尺寸Size	Φ90XH300mm
功率Power	6W
输入电压Input	85-265V
色温Color Temperature	2700K/3000K/4000K/6000K
显指C.R.I	80/90Ra
光束角Beam Angle	24°
材质Material	铝材Aluminum
防护等级 Protection grade	IP65

单位 Units:mm

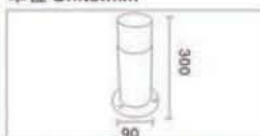



LED Wall Lawn Light Series  
LED户外草坪灯系列



BRL-2209

BRL-2210

BRL-2211

BRL-2212

型号Item NO	BRL-2209-3W	BRL-2210-5W	BRL-2211-3W	BRL-2212-5W
尺寸Size	Φ30XH500mm	Φ40XH600mm	Φ30XH500mm	Φ40XH600mm
功率Power	3W	5W	3W	5W
输入电压Input	85-265V			
色温Color Temperature	2700K/3000K/4000K/6000K			
显指C.R.I	80/90Ra			
光束角Beam Angle	24°			
材质Material	铝材Aluminum			
防护等级Protection grade	IP65			

优质铝制品 Cast aluminum body  
透光罩 PMMA  
3000/6000K 90-260V 50/60Hz





LED Wall Lawn Light Series  
LED户外草坪灯系列



BRL-2214深灰/黑色

BRL-2214深灰/黑色

型号Item NO	BRL-2214-3W	BRL-2214-3W
尺寸Size	Φ50XH600mm	Φ50XH800mm
功率Power	3W	3W
输入电压Input	85-265V	
色温Color Temperature	2700K/3000K/4000K/6000K	
显指C.R.I	80/90Ra	
光束角Beam Angle	24°	
材质Material	铝材Aluminum	
防护等级Protection grade	IP65	

优质铝制品 Cast aluminum body  
透光罩 PMMA  
3000/6000K 90-260V 50/60Hz



LED Wall Lawn Light Series  
LED户外草坪灯系列



型号Item NO	BRL-XJ-CP-2-6W	BRL-XJ-CP-8-6W	BRL-XJ-CP-1-6W	BRL-XJ-CP-10-6W	BRL-1812-E27
尺寸Size	Φ60XH480mm	Φ65XH680mm	Φ90XH550mm	Φ90XH700mm	Φ92XH415mm
功率Power	6W	6W	6W	6W	E27
输入电压Input	85-265V				
色温Color Temperature	2700K/3000K/4000K/6000K				
显指C.R.I	80/90Ra				
光束角Beam Angle	24°				
材质Material	铝材Aluminum				
防护等级Protection grade	IP65				

优质铝制品 Cast aluminum body  
透光罩 PMMA  
3000/6000K 90-260V 50/60Hz









LED Wall Lawn Light Series  
LED户外草坪灯系列



BRL-XJ-CP-9

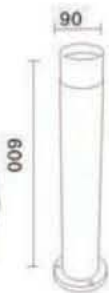


BRL-XJ-CP-5

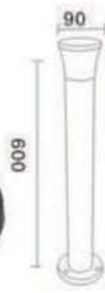

BRL-XJ-CP-3



BRL-XJ-CP-4

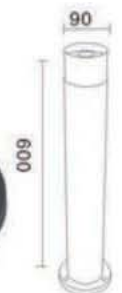

型号Item NO	BRL-XJ-CP-9-6W	BRL-XJ-CP-5-6W	BRL-XJ-CP-3-6W	BRL-XJ-CP-4-6W
尺寸Size	Φ90XH600mm	Φ90XH600mm	Φ90XH600mm	Φ90XH600mm
功率Power	6W	6W	6W	6W
输入电压Input	85-265V			
色温Color Temperature	2700K/3000K/4000K/6000K			
显指C.R.I	80/90Ra			
光束角Beam Angle	24°			
材质Material	铝材Aluminum			
防护等级Protection grade	IP65			


优质铝制品 Cast aluminum body  
透光罩 PMMA  
3000/6000K 90-260V 50/60Hz



LED Wall Lawn Light Series  
LED户外草坪灯系列




BRL-XJ-CP-7

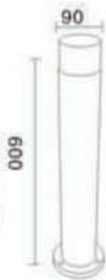

BRL-XJ-CP-6




BRL-1864-E27



BRL-1862-E27



BRL-1812-E27




型号Item NO	BRL-XJ-CP-7-6W	BRL-XJ-CP-6-6W	BRL-1864-E27	BRL-1862-E27	BRL-1904-E27
尺寸Size	Φ90XH600mm	Φ90XH600mm	Φ113XH803mm	Φ113XH803mm	Φ140XH930mm
功率Power	6W	6W	E27	E27	E27
输入电压Input	85-265V				
色温Color Temperature	2700K/3000K/4000K/6000K				
显指C.R.I	80/90Ra				
光束角Beam Angle	24°				
材质Material	铝材Aluminum				
防护等级Protection grade	IP65				

优质铝制品 Cast aluminum body  
透光罩 PMMA  
3000/6000K 90-260V 50/60Hz







LED Wall Lawn Light Series  
LED户外草坪灯系列

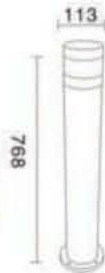

BRL-2146

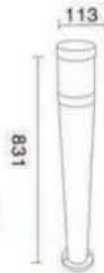

BRL-1924

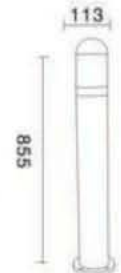

BRL-1838


型号Item NO	BRL-2146-7W	BRL-1924-7W	BRL-1838-E27
尺寸Size	Φ113XH768mm	Φ113XH831mm	Φ113XH855mm
功率Power	7W	7W	E27
输入电压Input	85-265V		
色温Color Temperature	2700K/3000K/4000K/6000K		
显指C.R.I	80/90Ra		
光束角Beam Angle	24°		
材质Material	铝材Aluminum		
防护等级Protection grade	IP65		

优质铝制品 Cast aluminum body  
透光罩 PMMA  
3000/6000K 90-260V 50/60Hz





LED Wall Lawn Light Series  
LED户外草坪灯系列

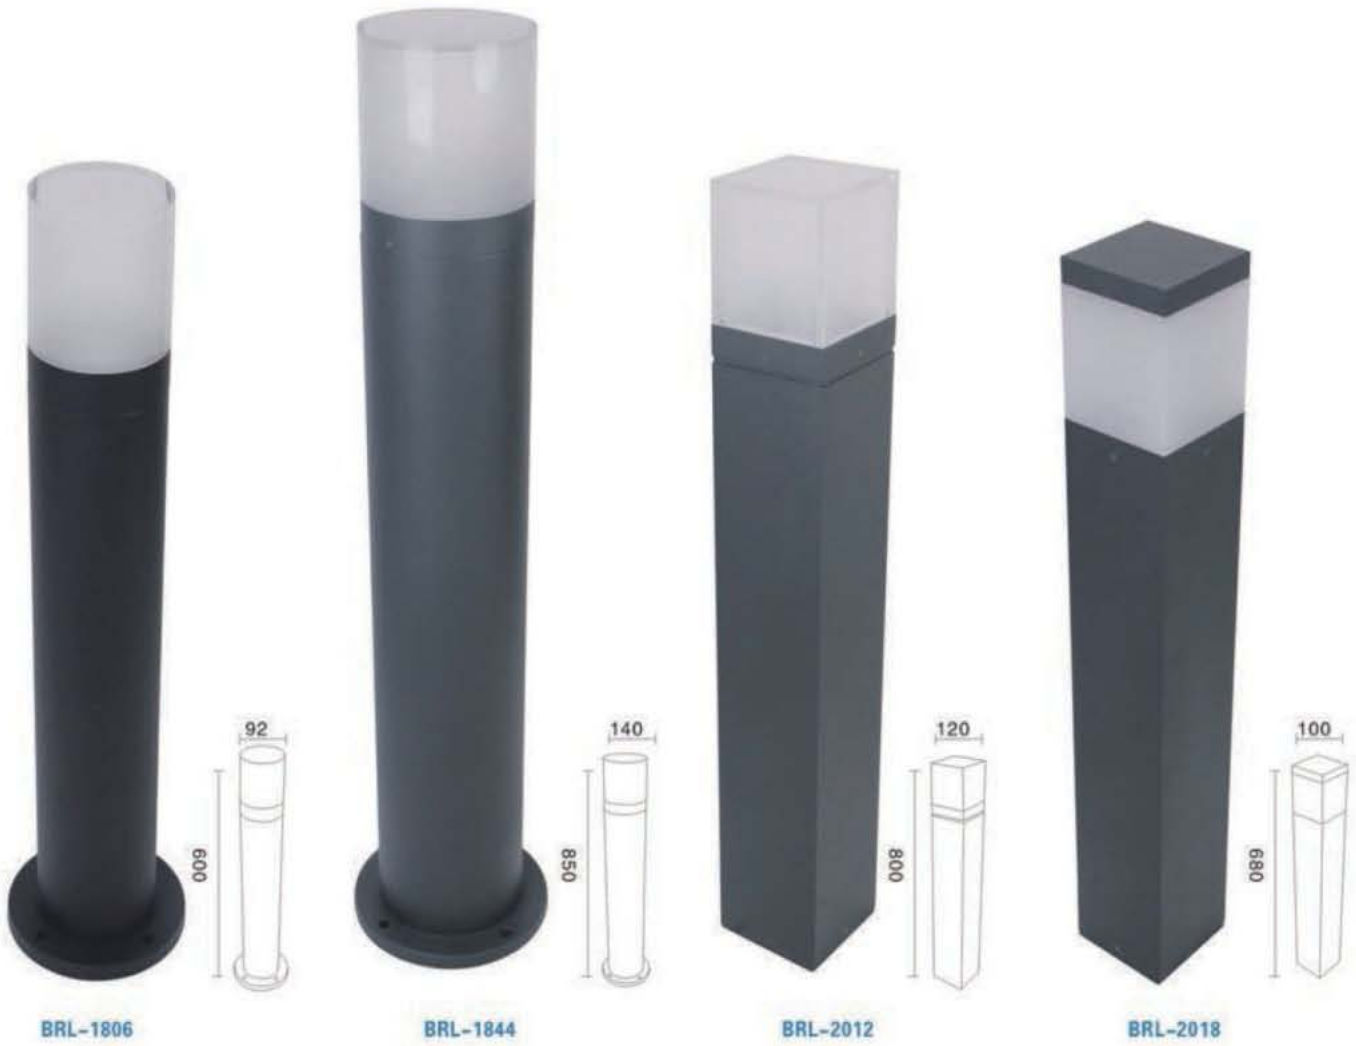

型号Item NO	BRL-1806-E27	BRL-1844-E27	BRL-2012-E27	BRL-2018-E27
尺寸Size	Φ92XH600mm	Φ140XH850mm	Φ120XH800mm	Φ100XH680mm
功率Power	E27	E27	E27	E27
输入电压Input	85-265V			
色温Color Temperature	2700K/3000K/4000K/6000K			
显指C.R.I	80/90Ra			
光束角Beam Angle	24°			
材质Material	铝材Aluminum			
防护等级Protection grade	IP65			

优质铝制品 Cast aluminum body  
透光罩 PMMA  
3000/6000K 90-260V 50/60Hz



