

PRODUCT CATALOG

Landscape Lighting 2019-2020



SERIAL INVESTMENT
LANKA (PVT) LTD

No 192 - 194, Nawala Road, Narahenpita, Colombo -05.

Tel : +94777789276

E-mail : serialinvestmentlanka@gmail.com



Serial Investment Lanka(Pvt) Ltd

Advanced Technologies in Lighting Solutions



CONTENTS

- LED Path Lights*
- LED Uper Lights*
- LED Wall Washer Lights*
- LED Underground Lights*
- LED Flood Lights*
- LED Sport Lights*
- LED Corrugated Lights*



Product Overview

LED Path Light



LED Uper Light



LED Wall Washer Light



LED Underground Light



LED Spot Light



LED Flood Light



LED Corrugated Light





*Pathways, Walkways, Park
and Small & Big areas*



	Watt	L	H
A	15W	φ150mm	600mm

Model No. HO-PL-02

Material: Aluminum + Painting
Power: COB*15W
Lift: Greater than 50,000 hours

Available finishing: Sand Black/ Sand Grey

Color Temperature:

- 3000K Warm White, 2700K Warm White,
- 5000K Neutral White, Amber



	Watt	L	H
A	12W	φ50mm	300mm
B	12W	φ50mm	600mm

Model No. HO-PL-01

Material: Aluminum + Acrylic
Power: COB*12W
Lift: Greater than 50,000 hours
Voltage: 12V 220V

Available finishing: Sand Black/ Sand Grey

Color Temperature:

- 3000K Warm White, 2700K Warm White,
- 5000K Neutral White, Amber



*Pathways, Walkways, Park
and Small & Big areas*



*Pathways, Walkways, Park
and Small & Big areas*



	Watt	L	H
A	10W	φ120mm	600mm

Model No. HO-PL-04

Material: Aluminum + Painting
Power: COB*10W
Life: Greater than 50,000 hours
Voltage: 110-20V 50/60Hz

Available finishing: Sand Black/ Sand Grey

Color Temperature:

3000K Warm White, 2700K Warm White,
5000K Neutral White, Amber



	Watt	L	W	H
A	10W	120mm	120mm	450mm

Model No. HO-PL-03

Material: Die-casting Aluminum
Power: COB*10W
Life: Greater than 50,000 hours
Voltage: 110-200V 50/60Hz


Available finishing: Sand Black/ Sand Grey

Color Temperature:

3000K Warm White, 2700K Warm White,
5000K Neutral White, Amber



*Pathways, Walkways, Park
and Small & Big areas*

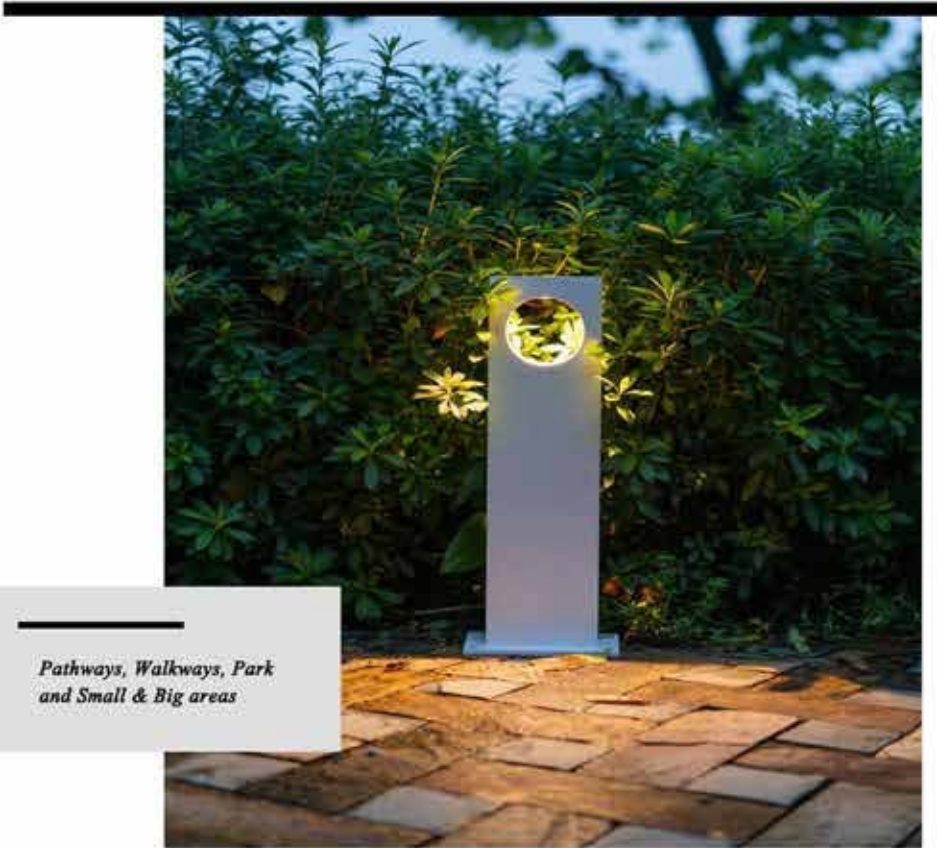

*Pathways, Walkways, Park
and Small & Big areas*



Model No. HO-PL-05

Material: Dia- casting Aluminum
Power: COB*10W
Lift: Greater than 50,000 hours
Voltage: 110-220V 50/60Hz

Available finishing: Sand Black/ Sand Grey

Color Temperature:
■ 3000K Warm White, ■ 2700K Warm White,
■ 5000K Neutral White, ■ Amber



Model No. HO-PL-06

Material: Aluminum + Acrylic Cover
Power: COB*6W
Lift: Greater than 50,000 hours
Voltage: 110-220V 50/60Hz

Available finishing: Sand Black/ Sand Grey

Color Temperature:
■ 3000K Warm White, ■ 2700K Warm White,
■ 5000K Neutral White, ■ Amber





Model No. HO-PL-07-A

Material: Aluminum + Acrylic Cover
 Power: COB*10W
 Lift: Greater than 50,000 hours
 Voltage: AC110-220V 50/60Hz

Available finishing: Sand Black/ Sand Grey/Customized

Color Temperature:

- 3000K Warm White, 2700K Warm White,
- 5000K Neutral White, Amber

*Pathways, Walkways, Park
 and Small & Big areas*



Model No. HO-PL-07-B

Material: Dia-casting Aluminum
 Power: COB*10W
 Lift: Greater than 50,000 hours
 Voltage: 110-220V 50/60Hz

Available finishing: Sand Black/ Sand Grey/Customized

Color Temperature:

- 3000K Warm White, 2700K Warm White,
- 5000K Neutral White, Amber



*Pathways, Walkways, Park
and Small & Big areas*



Model No. HO-PL-08

Material: Dia-casting Aluminum
Power: COB*5W
Lift: Greater than 50,000 hours
Voltage: 110-220V 50/60Hz

Available finishing: Sand Black/ Sand Grey/Customized

Color Temperature:

- 3000K Warm White, 2700K Warm White,
- 5000K Neutral White, Amber



Model No. HO-PL-07

Material: Dia- casting Aluminum
Power: 12W
Lift: Greater than 50,000 hours
Voltage: 110-220V 50/60Hz


Available finishing: Sand Black/ Sand Grey/ Customized

Color Temperature:

- 3000K Warm White, 2700K Warm White,
- 5000K Neutral White, Amber

*Pathways, Walkways, Park
and Small & Big areas*



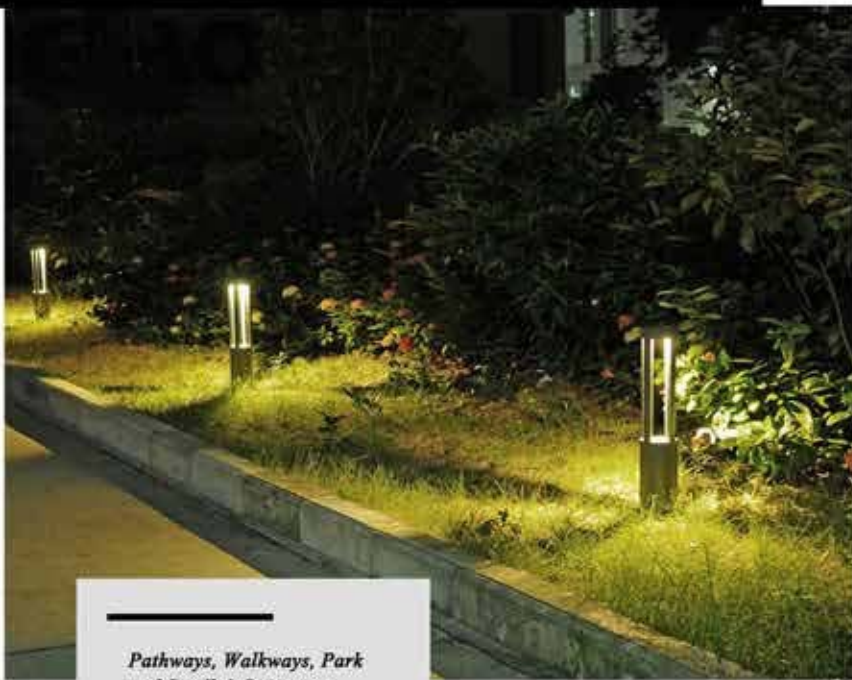

Pathways, Walkways, Park and Small & Big areas



Model	Watt	Dia.	H.
HO-PL-10-A	10W	φ125mm	300mm
HO-PL-10-B	10W	φ125mm	600mm
HO-PL-10-C	10W	φ125mm	900mm

Model No: HO-PL-10

Material: Aluminum + Painting
 Power: COB*10W
 Lift: Greater than 50,000 hours
 Voltage: 110-220V 50/60Hz

Available finishing: Sand Black/ Sand Grey

Color Temperature:
 3000K Warm White, 2700K Warm White,
 5000K Neutral White, Amber



Model	Watt	Dia.	H.
HO-PL-09-A	10W	φ105mm	400mm
HO-PL-09-B	10W	φ105mm	600mm

Model No: HO-PL-09-A

Material: Aluminum + Acrylic
 Power: COB*10W
 Lift: Greater than 50,000 hours
 Voltage: 110-220V 50/60Hz

Available finishing: Sand Black/ Sand Grey

Color Temperature:
 3000K Warm White, 2700K Warm White,
 5000K Neutral White, Amber

Model	Watt	Dia.	H.
HO-PL-12-A	10W	φ125mm	600mm
HO-PL-12-B	10W	φ125mm	900mm

Model No: HO-PL-11

Material: Aluminum + Painting
 Power: COB*10W
 Lift: Greater than 50,000 hours
 Voltage: 110-220V 50/60Hz

Available finishing: Sand Black/ Sand Grey

Color Temperature:
 3000K Warm White, 2700K Warm White,
 5000K Neutral White, Amber





*Pathways, Walkways, Park
and Small & Big areas*



Model	Watt	Dia	H
HO-PL-13-A	20W	φ145mm	1500mm
HO-PL-13-B	30W	φ145mm	2000mm
HO-PL-13-C	30W	φ145mm	2500mm
HO-PL-13-D	30W	φ145mm	3000mm

Model No: HO-PL-13-A

Round / Square model are available
 Material: Aluminum + Painting
 Power: COB* 20-30W
 Life: Greater than 50,000 hours

Color Temperature:
 3000K Warm White, 2700K Warm White,
 5000K Neutral White, Amber

Available finishing: Sand Black/ Sand Grey



Pathways, Walkways, Park and Small & Big areas



Model No. HO-UL-02

Material: Aluminum + Painting
 Power: COB*10W
 Lift: Greater than 50,000 hours
 Voltage: 110-200V 50/60Hz

Available finishing: Sand Black/ Sand Grey

Color Temperature:
 3000K Warm White, 2700K Warm White,
 5000K Neutral White, Amber




Model: HO-UL-01-A/B


Material: Dia- casting Aluminum
 Power: SMD *10W
 Lift: Greater than 50,000 hours
 Voltage: 110-200V 50/60Hz

Available finishing: Sand Black/ Sand Grey

Color Temperature:
 3000K Warm White, 2700K Warm White,
 5000K Neutral White, Amber

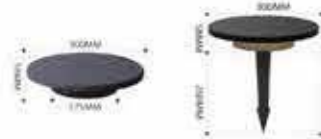

Pathways, Walkways, Park and Small & Big areas

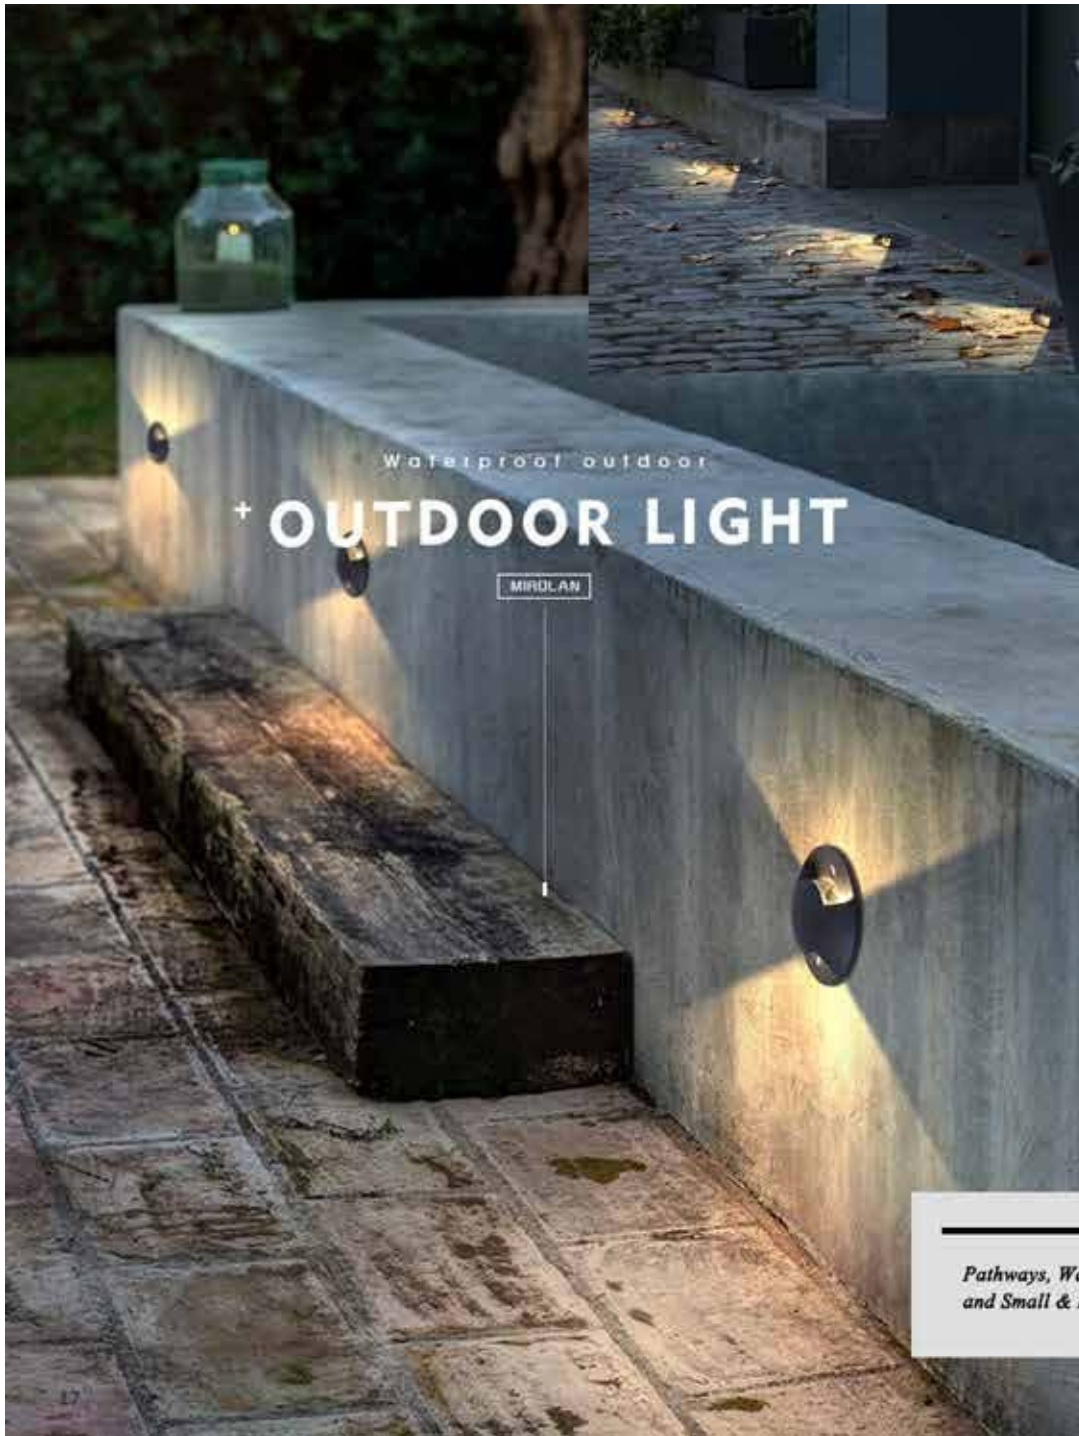

Waterproof outdoor
+ **OUTDOOR LIGHT**

MIRDLAN

*Pathways, Walkways, Park
and Small & Big areas*



Model No. HO-UL03-A

Material: Aluminum + Painting
Power: COB*1 2W
Lift: Greater than 50,000 hours
Product Size: $\phi 67.5 \times H90\text{mm}$

Available finishing: Sand Black/ Sand Grey

Color Temperature:

3000K Warm White, 2700K Warm White,
5000K Neutral White, Amber



Model No. HO-UL03-B

Material: Aluminum + Painting
Power: COB*1 2W
Lift: Greater than 50,000 hours
Product Size: $\phi 67.5 \times H90\text{mm}$

Available finishing: Sand Black/ Sand Grey

Color Temperature:

3000K Warm White, 2700K Warm White,
5000K Neutral White, Amber



Model No. HO-UL03-C

Material: Aluminum + Painting
Power: COB*1 2W
Lift: Greater than 50,000 hours
Product Size: $\phi 67.5 \times H90\text{mm}$

Available finishing: Sand Black/ Sand Grey

Color Temperature:


3000K Warm White, 2700K Warm White,
5000K Neutral White, Amber



Model No. HO-UL-04-A

Material: Aluminum + Painting
 Power: 2W
 Lift: Greater than 50,000 hours
 Voltage: 110-200V 50/60Hz

Available finishing: Black / White / Grey



Model No. HO-UL-04-B

Material: Aluminum + Painting
 Power: 2W
 Lift: Greater than 50,000 hours
 Voltage: 110-200V 50/60Hz

Available finishing: Black / White / Grey




Model No. HO-UL-04-D

Material: Aluminum + Painting
 Power: 2W
 Lift: Greater than 50,000 hours
 Voltage: 110-200V 50/60Hz



Model No. HO-UL-04-E

Material: Aluminum + Painting
 Power: 2W
 Lift: Greater than 50,000 hours
 Voltage: 110-200V 50/60Hz



Model No. HO-UL-04-C

Material: Aluminum + Painting
 Power: 4W
 Lift: Greater than 50,000 hours
 Voltage: 110-200V 50/60Hz

Available finishing: Black / White / Grey





Model No. HO-SPL-01

Material: Aluminum + Acrylic
 Power: 7W
 Life: Greater than 50,000 hours
 Voltage: 110-220V 50/60Hz

Available finishing: Sand Black/ Sand Grey/Customized

Color Temperature:
 3000K Warm White, 2700K Warm White,
 5000K Neutral White, Amber*, Blue,
 Green, Red



Model No. HO-SPL-02

Material: Aluminum + Painting
 Power: COB* 7W
 Life: Greater than 50,000 hours
 Voltage: 110-220V 50/60Hz

Available finishing: Sand Black/ Sand Grey

Color Temperature:
 3000K Warm White, 2700K Warm White,
 5000K Neutral White, Amber*, Blue,
 Green, Red



Model No. HO-PSPL-03

Material: Aluminum + Painting
 Power: COB* 7W
 Life: Greater than 50,000 hours
 Voltage: 110-220V 50/60Hz

Available finishing: Sand Black/ Sand Grey

Color Temperature:
 3000K Warm White, 2700K Warm White,
 5000K Neutral White, Amber*, Blue,
 Green, Red





Model No. HO-SPL-04

Material: Aluminum + Acrylic
 Power: 5W
 Lift: Greater than 50,000 hours
 Voltage: 110-220V 50/60Hz

Available finishing: Sand Black/Customized

Color Temperature:

- 3000K Warm White, 2700K Warm White,
- 5000K Neutral White, Amber*, Blue,
- Green, Red



Model No. HO-SPL-06

Material: Aluminum + Painting
 Power: COB* 7W
 Lift: Greater than 50,000 hours
 Voltage: 110-220V 50/60Hz

Available finishing: Sand Black/ Sand Grey

Color Temperature:

- 3000K Warm White, 2700K Warm White,
- 5000K Neutral White, Amber*, Blue,
- Green, Red



Model No. HO-SPL-07

Material: Aluminum + Painting
 Power: COB* 6W / 12W / 18W
 Lift: Greater than 50,000 hours
 Voltage: 110-220V 50/60Hz

Available finishing: Sand Black/ Sand Grey

Color Temperature:

- 3000K Warm White, 2700K Warm White,
- 5000K Neutral White, Amber*, Blue,
- Green, Red



Model No. HO-SPL-05

Material: Aluminum + Acrylic
 Power: 7W
 Lift: Greater than 50,000 hours
 Voltage: 110-220V 50/60Hz

Available finishing: Sand Black/ Sand Grey/Customized

Color Temperature:

- 3000K Warm White, 2700K Warm White,
- 5000K Neutral White, Amber*, Blue,
- Green, Red



Model	Watt	Dia	H
HO-SPL-07-A	6W	φ105mm	150mm
HO-SPL-07-A	12W	φ140mm	180mm
HO-SPL-07-A	18W	φ160mm	180mm
HO-SPL-07-B	6W	φ105mm	120mm
HO-SPL-07-B	12W	φ140mm	160mm
HO-SPL-07-B	18W	φ160mm	180mm



LED Wall Washer Light


**Application for Urban construction project
commercial building, cultural square, building
external hall, overpass...**

Model No. HO-WL-011

Technical Parameters

Item No	HO-WL-011
Light Source	CREE / Bridgelux / Osram / Epistar
Power	30W
Power of each LED	1W/Pcs
LED Quantity	30Pcs
LED Color (CCT)	Red/Green/Blue/Amber/White/ Warm White/RGB
Beam angle	15° 30° 45° 60° 15° 45°
Housing Material	Aviation Aluminum, anodized surface painting
Lamp size	1000*50*35 mm
Transparent Cover material	4mm Toughened ultra white glass
Working voltage	AC85-265V / DC24V
Control Mode	DMX12/isolated constant current driver
Power factor	≥0.5 / ≥0.9
Power cable	3*0.75mm ² / 2*0.75mm ²
Environmental temperature	-20°C ~50°C

Light-matching curve

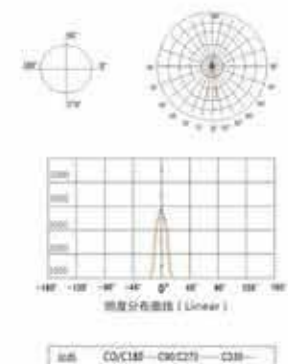




Model No. HO-WL-010

Technical Parameters

Item No	HO-WL-010
Light Source	CREE / Bridgelux / Osram / Epistar
Power	12W/18W/24W/36W/48W/60W
Power on each LED	1W/Pcs
LED Quantity	12Pcs/ 18Pcs/ 24Pcs/ 36Pcs / 48Pcs/ 60Pcs
LED Color (CCT)	Red/Green/Blue/Amber/White/ Warm White/RGB
Beam angle	15°30'45°60°15°45°
Housing Material	Aviation Aluminum, anodized surface painting
Lamp size	166*42*75mm(6W)
Transparent Cover material	4mm Toughened ultra white glass
Working voltage	DC24V
Control Mode	DMX512/Isolated constant current driver
Power factor	≥0.5 / ≥0.9
Power cable	3*0.75mm ² / 2*0.75mm ²
Environmental temperature	-20℃~50℃
IP Rate	IP65

Light-matching curve

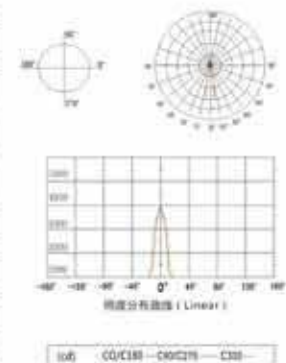




Model No. HO-WL-012

Tehcnical Parameters

Item No	HO-WL-012
Light Souce	CREE /Bridgelux/ Osram/ Epistar
Power	12W/18W/24W
Power or each LED	1W/Pcs
LED Quantity	12Pcs/ 18Pcs/ 30Pcs
LED Color (CCT)	Red/Green/Blue/Amber/White/ Warm White/RGB
Beam angle	15°30°45°60°15°45°
Housing Material	Aviation Aluminum,anodized surface painting
Lamp size	1000*45*30mm
Transparent Cover material	4mm Toughened ultra white glass
Working voltage	AC85-265V / DC24V
Control Mode	DMX512/Isolated constant current driver
Power factor	≥0.5 / ≥0.9
Power cable	3*0.75mm ² / 2*0.75mm ²
Enviromental temperature	-20℃-50℃
IP Rate	IP65

Light-matching curve

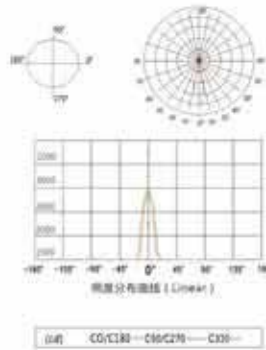


Model No. HO-WL-013

Tehcnical Parameters

Item No	HO-WL-013
Light Souce	CREE /Bridgelux/ Osram/ Epistar
Power	36W/ 48W
Power or each LED	1W/Pcs
LED Quantity	36Pcs / 48Pcs
LED Color (CCT)	Red/Green/Blue/Amber/White/ Warm White/RGB
Beam angle	15°30°45°60°15°45°
Housing Material	Aviation Aluminum,anodized surface painting
Lamp size	1000*80*60mm
Transparent Cover material	4mm Toughened ultra white glass
Working voltage	AC85-265V / DC24V
Control Mode	DMX512/Isolated constant current driver
Power factor	≥0.5 / ≥0.9
Power cable	3*0.75mm ² / 2*0.75mm ²
Enviromental temperature	-20℃-50℃
IP Rate	IP65

Light-matching curve

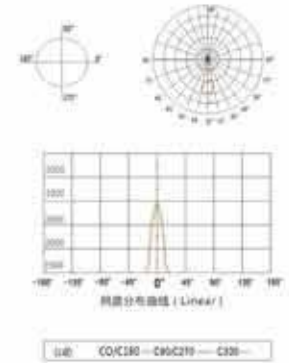



Model No : HO-DL-011

Model No.	Power	Cut-out	Product Size	Light Source	Chip Brand	Chip Qty
HO-DL-011	3W	φ55mm	φ100*H65mm	Cree/Bridgelux	1W/PCs	3Pcs
HO-DL-011	5W	φ70mm	φ120*H75mm	Cree/Bridgelux	1W/PCs	5Pcs
HO-DL-011	9W	φ90mm	φ150*H90mm	Cree/Bridgelux	1W/PCs	9Pcs
HO-DL-011	12W	φ115mm	φ180*H90mm	Cree/Bridgelux	1W/PCs	12Pcs
HO-DL-011	18W	φ125mm	φ200*H75mm	Cree/Bridgelux	1W/PCs	18Pcs
HO-DL-011	24W	φ195mm	φ250*H80mm	Cree/Bridgelux	1W/PCs	24Pcs
HO-DL-011	36W	φ240mm	φ300*H90mm	Cree/Bridgelux	1W/PCs	36Pcs

Color Tem:

- 3000K Warm White
- 2700K Warm White
- 5000K Neutral White
- Amber, Blue, Green, Red
- RGB



Model No: HO-DL-010

Power: 1W
 Chip: Cree/ Bridgelux/ Epistar
 Size: 42*72*35mm
 52*72*46mm
 62*90*54mm

Color Temperature:
 3000K Warm White, 2700K Warm White,
 5000K Neutral White, Amber, Blue,
 Green, Red





Model No: HO-DL-013

Item No	HO-DL-013-9	HO-DL-013-27	HO-DL-013-54	HO-DL-013-108
Lamp size	91*140mm	140*175mm	180*208mm	230*215mm
Power	9W	27W	54W	108W
LED Quantity	3Pcs	9Pcs	18Pcs	36Pcs
Power of each LED	3W/Pcs	3W/Pcs	3W/Pcs	3W/Pcs
LED Color (CCT)	Red/Green/Blue/Amber/White/ Warm White/RGB			
Beam angle	15°/30°/45°/60°			
Housing Material	Aviation Aluminum, anodized surface painting			
Light Source	CREE /Bridgelux/ Osram/ Epistar			
Transparent Cover material	4mm Toughened ultra glass			
Working voltage	AC175-265V/ DC24V			
Control Mode	Isolated driver			
Power factor	≥0.5 / ≥0.9			
Power cable	3*0.75mm ² / 2*0.75mm ²			
Environmental temperature	-20℃ -50℃			
IP Rate	IP65			



Model No : HO-DL-012

Techncal Parameters

Model No.	Power	Cut-out	Product Size	Light Source	Chip Brand	Chip Qty
HO-DL-012	3W	φ65mm	φ100*H100mm	Cree/Bridgelux	1W/PCs	3Pcs
HO-DL-012	6W	φ85mm	φ150*H100mm	Cree/Bridgelux	1W/PCs	5Pcs
HO-DL-012	9W	φ112mm	φ180*H100mm	Cree/Bridgelux	1W/PCs	9Pcs
HO-DL-012	12W	φ112mm	φ180*H100mm	Cree/Bridgelux	1W/PCs	12Pcs
HO-DL-012	18W	φ142mm	φ200*H100mm	Cree/Bridgelux	1W/PCs	18Pcs
HO-DL-012	24W	φ160mm	φ250*H100mm	Cree/Bridgelux	1W/PCs	24Pcs
HO-DL-012	36W	φ190mm	φ250*H100mm	Cree/Bridgelux	1W/PCs	36Pcs
HO-DL-012	54W	φ190mm	φ300*H100mm	Cree/Bridgelux	1W/PCs	54Pcs

Color Tem:

- 3000K Warm White
- 2700K Warm White
- 5000K Neutral White
- Amber ● Blue
- Green, ● Red
- RGB



Model No: HO-DL-014

Item No	HO-DL-014-18	HO-DL-014-32	HO-DL-014-48	HO-DL-014-60
Lamp size	96*96*150mm	135*135*215mm	170*170*260mm	213*213*345mm
Power	18W	32W	48W	120W
LED Quantity	9Pcs	16Pcs	24Pcs	60Pcs
Power of each LED	2W/Pcs	2W/Pcs	2W/Pcs	2W/Pcs
LED Color (CCT)	Red/Green/Blue/Amber/White/ Warm White/RGB			
Beam angle	15°/30°/45°/60°			
Housing Material	Aviation Aluminum, anodized surface painting			
Light Source	CREE /Bridgelux/ Osram/ Epistar			
Transparent Cover material	4mm Toughened ultra glass			
Working voltage	AC175-265V/ DC24V			
Control Mode	Isolated driver			
Power factor	≥0.5 / ≥0.9			
Power cable	3*0.75mm ² / 2*0.75mm ²			
Environmental temperature	-20℃ -50℃			
IP Rate	IP65			



Model No: HO-DL-018-5
Power: 3W
Bridgelux/Osram/Epistar
0.2W/Pcs 12Pcs
Size: $\phi 85 \times 73$ mm
Beam Angle: 180°
CCT: 2500K/3000K/4000K/Red
Blue/ Green



Model No: HO-DL-019-3
Power: 3W
Bridgelux/Osram/Epistar
0.2W/Pcs 12Pcs
Size: $\phi 120 \times 70$ mm
Beam Angle: 180°
CCT: 2500K/3000K/4000K/Red
Blue/ Green



Model No: HO-DL-020-5
Power: 5W
Bridgelux/Osram/Epistar
1W/Pcs 5Pcs
Size: $\phi 140 \times 80$ mm
Beam Angle: 180°
CCT: 2500K/3000K/4000K/Red
Blue/ Green



Model No: HO-DL-021-7
Power: 7W
Bridgelux/Osram/Epistar
1W/Pcs 17Pcs
Size: $\phi 138 \times 85$ mm
Beam Angle: 180°
CCT: 2500K/3000K/4000K/Red
Blue/ Green



Model No: HO-DL-016-5
Power: 5W
Bridgelux/Osram/Epistar
0.2W/Pcs 18Pcs
Size: $\phi 100 \times 60$ mm
Beam Angle: 180°
CCT: 2500K/3000K/4000K/Red
Blue/ Green



Model No: HO-DL-017-3
Power: 3W
Bridgelux/Osram/Epistar
1W/Pcs 3Pcs
Size: $\phi 100 \times 90$ mm
Beam Angle: 180°
CCT: 2500K/3000K/4000K/Red
Blue/ Green



Model No: HO-DL-022-7
Power: 7W
Bridgelux/Osram/Epistar
1W/Pcs 7Pcs
Size: $\phi 165 \times 50$ mm
Beam Angle: 180°
CCT: 2500K/3000K/4000K/Red
Blue/ Green



Model No: HO-DL-23-3
Power: 3W
Bridgelux/Osram/Epistar
0.2W/Pcs 12Pcs
Size: $\phi 100 \times 83$ mm
Beam Angle: 180°
CCT: 2500K/3000K/4000K/Red
Blue/ Green



Model No: HO-DL-0127-6
Power: 6W
Bridgelux/Osram/Epistar
1W/Pcs 6Pcs
Size: 210*46*10mm
Beam Angle: 15°30'45"60°
CCT: 3000K/4000K/6000K
Red/Blue/Green



Model No: HO-DL-0128-9
Power: 9W
Bridgelux/Osram/Epistar
1W/Pcs 9Pcs
Size: 205*56*95mm
Beam Angle: 15°30'45"60°
CCT: 3000K/4000K/6000K
Red/Blue/Green



Model No: HO-DL-0129-6
Power: 6W
Bridgelux/Osram/Epistar
1W/Pcs 6Pcs
Size: 160*50*60mm
Beam Angle: 15°30'45"60°
CCT: 3000K/4000K/6000K
Red/Blue/Green



Model No: HO-DL-0130--6
Power: 6W
Bridgelux/Osram/Epistar
1W/Pcs 6Pcs
Size: 181*42*23mm
Beam Angle: 15°30'45"60°
CCT: 3000K/4000K/6000K
Red/Blue/Green



Model No: HO-DL-0124-3
Power: 3W
Bridgelux/Osram/Epistar
3W/Pcs 1Pcs
Size: 120*120*40mm
Beam Angle: 15°30'45"60°
CCT: 3000K/4000K/6000K
Red/Blue/Green



Model No: HO-DL-0125-2
Power: 2W
Bridgelux/Osram/Epistar
1W/Pcs 2Pcs
Size: 120*120*40mm
Beam Angle: 15°30'45"60°
CCT: 3000K/4000K/6000K
Red/Blue/Green



Model No: HO-DL-0126-3
Power: 3W
Bridgelux/Osram/Epistar
1W/Pcs 3Pcs
Size: 120*120*40mm
Beam Angle: 15°30'45"60°
CCT: 3000K/4000K/6000K
Red/Blue/Green



Model No: HO-DL-0131-5
Power: 5W
Bridgelux/Osram/Epistar
1W/Pcs 5Pcs
Size: 190*30*92mm
Beam Angle: 15°30'45"60°
CCT: 3000K/4000K/6000K
Red/Blue/Green



Model No: HO-DL-0132-6
Power: 6W
Bridgelux/Osram/Epistar
1W/Pcs 6Pcs
Size: 196*37*50mm
Beam Angle: 15°30'45"60°
CCT: 3000K/4000K/6000K
Red/Blue/Green